

MOTOTRBO™

ADP

APPLICATIONS

CATALOGUE



THE LARGEST PORTFOLIO OF APPLICATIONS FOR DIGITAL TWO-WAY RADIO
POWERED BY THE MOTOTRBO™ APPLICATION DEVELOPER PROGRAMME
END-USER VERSION | OCTOBER 2013







CUSTOMISING COMMUNICATIONS TECHNOLOGY IS IMPORTANT TO OUR CUSTOMERS IN ALL INDUSTRIES

Combining the best in two-way radio functionality with digital technology, MOTOTRBO™ delivers increased capacity and enhanced functionality but also makes it possible to expand communications beyond voice. MOTOTRBO solutions enable organisations to expand the functionality of their digital radios with integrated applications such as text messaging, location-based services (LBS) and telemetry as well as the capability to customise solutions using an internal option board.

Through our MOTOTRBO Application Developer Programme (ADP), we collaborate with industry experts around the world, providing access to our MOTOTRBO technology for the creation of customised and integrated communication solutions. ADP Partners are software developers and system integrators who have proven their expertise and commitment to deliver high quality, integrated and customer-focused applications for a wide range of industry sectors. These applications, combined with Motorola's extensive experience in radio systems, harness the true potential of the MOTOTRBO two-way radio portfolio.

EXPAND YOUR COMMUNICATIONS BEYOND VOICE

Whether workers are making deliveries, managing guests, repairing roads or restoring power lines, data applications change the way employees collaborate and transform an enterprise. With the industry's largest Application Developer Programme, MOTOTRBO supports a wide range of data applications embracing all critical aspects of your operational needs.



CONTROL ROOMS

Fleet management and dispatcher solutions allowing efficient tracking of workers, vehicles and business assets to enhance safety and productivity. Job ticketing applications enhance the efficiency of personnel in charge of customer requests and operations.



SAFETY

Alarm management, indoor localisation, man down and guard tour applications to manage resources more efficiently and protect lone or 'at risk' workers and assets.



RADIO INFRASTRUCTURE

Infrastructure and network components to connect and interoperate seamlessly with other radio systems, telephony systems and mobile computing devices, plus system performance solutions to understand and control the radio system usage to optimise performance.



DATA TRANSMISSION & TELEMETRY

Stay in control and conveniently monitor machine or facility alarms and remotely control doors with advanced telemetry solutions.



MIGRATION TO DIGITAL

Applications for migration from analogue to digital ensure smooth operations during system migration and can be used to gradually replace analogue radios in existing systems.

THE MOTOTRBO APPLICATION DEVELOPER PROGRAMME DELIVERS OUTSTANDING APPLICATIONS.

FIND THE APPLICATION AND MOTOROLA PARTNER TO MEET YOUR SPECIFIC NEEDS AND TAKE YOUR COMMUNICATIONS TO THE NEXT LEVEL.

[illegible]



CONTENTS



10

CONTROL
ROOMS

- 14 C.O.D.I.C.E. II**
SAITEL TELECOMUNICAZIONI
- 16 CENTRAL RECORDER**
BPG RADIOCOMUNICAZIONI
- 18 CMO**
EUROCOM TELECOMUNICAZIONI
- 20 COM**
BPG RADIOCOMUNICAZIONI
- 22 CONSEL**
AKSEL
- 24 DMRALERT ENTERPRISE**
EIFFAGE
- 26 DMRALERT INTRACK**
EIFFAGE
- 28 DMRALERT STREET**
EIFFAGE
- 30 DRC9010**
ATS ELEKTRONIK
- 32 EZTRACKER@TRBO**
TABLETMEDIA INC
- 34 HERMESTRX -
HERMESTRX PLUS**
HERMES MICROCOM
- 36 HERMESTRX
INDOOR & OUTDOOR**
HERMES MICROCOM
- 38 KOLIBRI**
KOLIBRI SYSTEMS
- 40 KOLIBRI LOGGING SYSTEM**
KOLIBRI SYSTEMS
- 42 MIMER SOFTRADIO**
LS ELEKTRONIK

- 44 SAFEDISPATCH**
SAFEMOBILE
- 46 SAFEDISPATCH MOBILE**
SAFEMOBILE
- 48 SAFENET END-USER**
SAFEMOBILE
- 50 SHORTTRACK GT**
SAITEL TELECOMUNICAZIONI
- 52 SHORTTRACK LIVE**
SAITEL TELECOMUNICAZIONI
- 54 SMARTPTT BASIC**
ELCOMPLUS
- 56 SMARTPTT ENTERPRISE**
ELCOMPLUS
- 58 TELDIO R2R RECORDING**
TELDIO
- 60 TEXT@TRBO**
TABLETMEDIA INC
- 62 TEXT@TRBOPLUS**
TABLETMEDIA INC
- 64 TRBONET ENTERPRISE**
NEOCOM
- 66 TRBONET JOB TICKETING**
NEOCOM
- 68 WAVE**
TWISTED PAIR
- 70 WEBTRACKER@TRBO**
TABLETMEDIA INC



72



SAFETY

- 76 B-AQUASAFE**
DATAMATIK
- 78 BPG TRBOPLUS
GPS DATA LOGGER**
BPG RADIOCOMUNICAZIONI
- 80 DMR910**
ATS ELEKTRONIK
- 82 DMR915**
ATS ELEKTRONIK
- 84 DMRALERT GT**
EIFFAGE
- 86 HERMES MAN DOWN**
HERMES MICROCOM
- 88 HERNING SAFETY M.D.**
DATAHERTZ
- 90 K-TERM 44**
KILCHHERR ELEKTRONIK
- 92 K-TERM 70**
KILCHHERR ELEKTRONIK
- 94 TELDIO MAN DOWN
NOTIFIER**
TELDIO
- 96 TRBOMOVE**
SAITEL TELECOMUNICAZIONI
- 98 TRBONET INDOOR**
NEOCOM
- 100 ZONITH INDOOR
POSITIONING SYSTEM**
ZONITH



102

RADIO
INFRASTRUCTURE

- 106 ADEO INTEROX**
EUROCOM TELECOMUNICAZIONI
- 108 AUDIO GATEWAY RA-TI-XX**
RADIO ACTIVITY
- 110 BPG TRBOPLUS LABS2**
BPG RADIOCOMUNICAZIONI
- 112 EASY SIMULCAST**
RADIO ACTIVITY
- 114 FS-3000**
FRIENDLY LLC
- 116 GW3-TRBO**
GENESIS
- 118 HERNING D.H.R**
DATAHERTZ
- 120 K-TERM 82**
KILCHHERR ELEKTRONIK
- 122 PHONE@TRBO**
TABLETMEDIA INC
- 124 RADIUS-IP**
ELCOMPLUS
- 126 SMARTPTT MONITORING**
ELCOMPLUS
- 128 TELDIO RBX +PLUS**
TELDIO
- 130 TRBONET WATCH**
NEOCOM



132

DATA TRANSMISSION
& TELEMETRY

- 136 COP921**
ATS ELEKTRONIK
- 138 DMP921**
ATS ELEKTRONIK
- 140 DMR921**
ATS ELEKTRONIK
- 142 DMRALERT TAD**
EIFFAGE
- 144 IFM11**
CONNECTEL
- 146 RADIOPAD / RADIOPOD**
SAFEMOBILE
- 148 SMARTPTT FILE TRANSFER**
ELCOMPLUS
- 150 WITACS**
EUROCOM TELECOMUNICAZIONI
- 152 ZONITH ALARM CONTROL SYSTEM**
ZONITH



154

MIGRATION
TO DIGITAL

- 158 BPG TRBOPLUS TALK FINDER**
BPG RADIOCOMUNICAZIONI
- 160 K-TERM 42**
KILCHHERR ELEKTRONIK
- 162 MOTONBOARD**
EUROCOM TELECOMUNICAZIONI



CONTROL ROOMS



CONTROL ROOMS



Choose from a whole range of solutions designed to help control rooms enhance productivity and streamline operations. Managing mobile fleets with a centralised dispatch application enables organisations to work more efficiently and respond more quickly. Identify the exact location of personnel and vehicles using integrated GPS and tracking applications, so the nearest operative can be dispatched for the job. This improves customer service and staff safety, while also saving valuable time and reducing operating costs. Simplify workflow management by issuing work order tickets immediately to the right person using your MOTOTRBO radio and alleviate the hassle of manual paperwork. In addition, managers can monitor the progress of tasks remotely, freeing up more time for other priorities.

Text communication and email applications allow you to communicate discreetly, so guests aren't disturbed and security isn't compromised. They also contribute towards more precise communication for relaying important information such as part numbers.



C.O.DI.CE II

RADIO DISPATCHER, CALL LOGGING, VOICE RECORDER



C.O.DI.CE II
C.O.DI.C.E. II IS A COST EFFECTIVE RADIO DISPATCHER FOR SMALL TO LARGE COMMAND AND CONTROL CENTRES. PROVIDING A FULL VOICE AND DATA SOLUTION, IT CONSIDERABLY IMPROVES FLEET SITUATION AWARENESS, ALLOWING THE RADIO DISPATCHER OPERATOR TO REACT VERY RAPIDLY EVEN IN CASE OF EMERGENCY.

MARKETS

Public Safety (Police, Ambulance, Fire Brigades), Rescue Services, Transportation, Industry (Oil & Gas, Steel industries...).

DISTRIBUTION

EMEA.

LANGUAGES

Italian, English.

Other languages on request.


C.O.di.CE is an integrated and modular dispatch system, based on a Client-Server architecture, for the management of voice and data communications suitable for multi-operator, multi-channel and multi-protocol PMR networks.

C.O.di.CE has been designed for the radio operator to considerably improve their situation awareness of the fleet. It allows the operator to react very rapidly even in case of emergency. Easily configurable even by unskilled users, C.O.di.CE permits an independent configuration for each channel to manage different radio protocols at the same time without changing user operation mode.

C.O.di.CE includes an integrated call logging and voice recorder that captures radio traffic on each channel and stores everything on low cost digital storage. Radio communications can be rebuilt at any time. The dynamic phonebook, with its dual display mode, allows the operator to communicate effectively with the fleet and allows real time radio fleet expansion.

The radio positions can be displayed on Google Maps (requires Internet connection) and Google Earth (requires Internet connection or maps caching).

C.O.DI.CE II

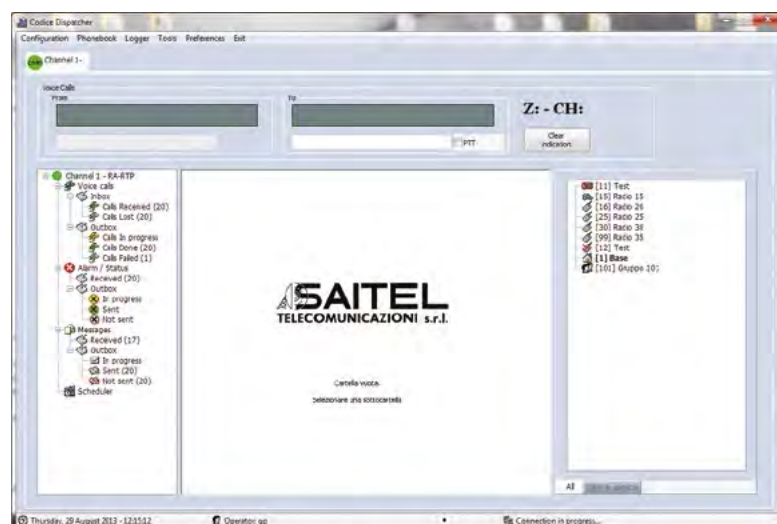

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

Motorola DM/DP series.

Computer Hardware / Operating Systems

PC with OS Microsoft Windows XP PRO or higher.

Interfaces

RS232 port for conventional radios or TETRA radios. USB port for MOTOTRBO radios. Ethernet card for client/server architectures. Sound Card for voice recorder.

MOTOTRBO System Architecture

Conventional, IP Site Connect, Capacity Plus, Linked Capacity Plus, Connect Plus.

KEY FEATURES & BENEFITS

- Full voice and data solution.
- Events logger with offline analysis.
- Voice call recorder with real time playback.
- Predefined and free text messages.
- Several safety levels.
- Easy to use.
- Modular.
- Multioperator, multichannel and multiprotocol (5T, ETS 300 230, DMR, TETRA).
- Efficient use of channel bandwidth.
- Easy configuration.
- Fully integrated with AVL software ShortTrack.
- Open to third party applications (protocol available for developers).
- Supports analogue conventional and digital radios (both DMR and TETRA).
- Scalable from one single operator with a stand-alone laptop to large control center with several parallel operating positions.

FIND OUT MORE

WEB: www.saitel.it

ALSO FROM SAI TEL TELECOMUNICAZIONI



CENTRAL RECORDER
BPG CENTRAL RECORDER IS AN IDEAL SOLUTION FOR SMALL TO MIDSIZE ENTERPRISES TO CAPTURE, STORE, RETRIEVE AND PLAY BACK VOICE WITH IDENTIFICATION ON MOTOTRBO SYSTEMS.

MARKETS

Enterprise, Industrial, Public Safety, Emergency Services, Transport Enterprises, Municipal Services.

DISTRIBUTION

EMEA.

LANGUAGES

English, Italian, French.
Other languages available on request.

CENTRAL RECORDER


MOTOTRBO VOICE RECORDING SYSTEM

Central Recorder is a reliable MOTOTRBO voice recording system that is ideal for small and midsize companies. It captures multichannel audio with related MOTOTRBO signalling: group ID, private ID, alias and channel.

Central Recorder is able to decode and match to the audio tracks, the reports of the following radio systems: MOTOTRBO (DMR), TETRA (connection to a Motorola MTM800 Motorola), Analogue 5 (tones selective in various formats and standards including ZVEI1, ZVEI2, CCIR and EEA), FSK ETS 300-230 and MDC1200.

It is a web based application with unlimited browser based search and reply licenses. Recording can be accessed remotely from anywhere and on any computer.

CENTRAL RECORDER

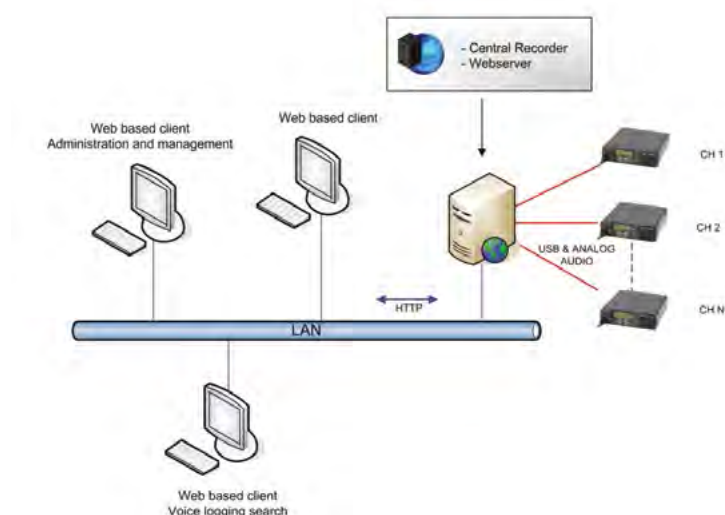

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

MOTOTRBO radio DM34xx, 36xx, 44xx or 46xx.

Computer Hardware / Operating Systems

Personal computer with Windows XP SP3, Vista SP1 or Windows 7 with as many available USB ports as the number of channels to be recorded, 4Gb RAM (depending on operating system used), multichannel sound card.

Interfaces

Available USB port.

KEY FEATURES & BENEFITS

- An intuitive web based interface enables recordings to be retrieved and replayed from any location at any time.
- Web-based configuration and administration tools.
- Playback & call search.
- Replay over the LAN/internet via web browser.
- Call can be searched by any combination: Call duration, Date and time, Channel, Name and/or caller ID (MOTOTRBO ID), Group name/ID (MOTOTRBO ID).
- Unlimited browser-based search and replay licenses.
- Remote administration capabilities.

FIND OUT MORE

WEB: www.bpg.it/en/index.php?section=central_recorder

ALSO FROM BPG RADIOCOMUNICAZIONI



CMO

COMMUNICATIONS MANAGEMENT OPERATOR

CMO
CMO WAS SPECIFICALLY DEVELOPED FOR AUTHORITIES THAT NEED INTERCONNECTIONS, LOCALISATION AND COORDINATION BETWEEN VARIOUS OPERATORS WORKING ON A WIDE TERRITORY – FOR ALL SECURITY AND CONTROL PURPOSES.

CMO is a multifunctional operating unit that allows communications between heterogeneous networks. CMO provides different management services, such as Dispatcher Functions, Radio Localisation, GPS navigation and Call Recording.

The framework is based on Intercom System, a Client/Server architecture that guarantees maximum expandability of the number of Client and the future integration of new technologies.

With CMO, the radio audio is converted into a VOIP signal and sent from Server to Client and vice versa. This technology allows flexibility and remote control of the network. On request it is possible to customise the CMO functions and modules.

CMO is targeted at public and private administrations for security and control purposes and all authorities that need interconnections, localisation and coordination between operators working on a wide territory.

MARKETS

Public Administration,
Private Organisations.


DISTRIBUTION

EMEA and Latin America.

LANGUAGES

English, Italian, French, Spanish.
Other languages on request.

CMO

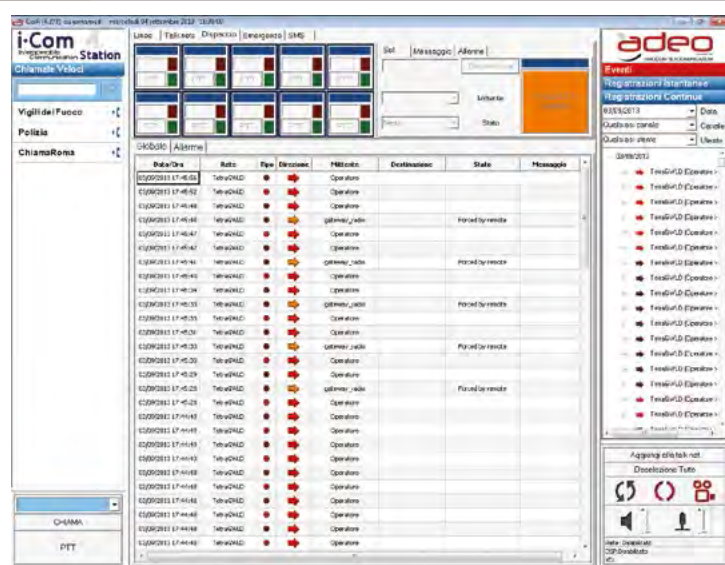

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

DM3600 release 1.4 or higher, compatible since release 01.02.03, RNDIS Motorola Driver, Motorola connection wire PMKN4016A.

Computer Hardware / Operating Systems

Workstation PC with Microsoft OS. IPv4/v6, one sound card device per channel and one port (Serial/USB) per channel. Suggested Pentium 4 or equivalent, 1Gb RAM, 50 Gb HDD.

Interfaces

iRadio Gateway hardware supplied by Eurocom Telecomunicazioni.

MOTOTRBO System Architecture

Conventional, IP Site Connect, Capacity Plus, Linked Capacity Plus and Connect Plus.

Other Requirements

Experience in MOTOTRBO radio programming. Basic OS and IT administration knowledge required.

KEY FEATURES & BENEFITS

- Developed to serve public and private administrations for security and control purposes.
- The software is able to connect different types of users using different technologies (PMR, DMR, TETRA, GSM/GPRS, PABX and HF). For example, a police headquarters, through CMO, is able to coordinate a complex scenario, operated by different authorities such as firefighters, ambulance and police, using different radio devices.
- Client / Server architecture.
- GPS navigation, radio localisation.
- Call recording / Coding.
- Scalable.
- VOIP based.
- Cross Patch functionality.
- Telephone Communications.
- Support heterogeneous technology.
- Cross Patch (telephone interconnect).

FIND OUT MORE

WEB: <http://cmo.eurocomtel.com>

ALSO FROM EUROCOM TELECOMUNICAZIONI



COM

RADIO DISPATCHER, CALL LOGGING, TEXT MESSAGING, GPS AND INDOOR LOCALISATION

COM is a modular software solution that can integrate one or more modules:

- Talk Manager - Radio communication management dispatcher.
- Talk Finder - Outdoor and indoor localisation system.
- Talk Recorder - Voice recording.

COM allows computerised management of verbal communication, selective calls, alarms, text messages and status messages to minimise the use of voice communications by increasing the channel traffic capacity, and the location of a fleet of vehicles or people.

COM Client Application is based on a modular concept which allows a simple and intuitive management of radio communications in the form of a multi-functional center console.

At the server side, two components are used in order to perform the best integration with the MOTOTRBO system and its embedded ARS services: COM Radioserver and COM Presence Notifier.

COM now also provides indoor localisation based on wireless beacons.

COM



SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

MOTOTRBO radio DM34xx, 36xx, 44xx, 46xx.

Computer Hardware / Operating Systems

Personal computer with Windows 7 / Windows 8 with at least 2 USB port, 4Gb RAM (depending on map used), resolution 1280x800 (minimum), Sound card.

Interfaces

2 USB ports.

MOTOTRBO System Architecture

IP Site connect, Capacity Plus, Linked Capacity Plus.

KEY FEATURES & BENEFITS

Talk Manager:

- Manages all type of calls - private, group, emergency, call alerts.
- Text messages to and from single radio or groups.
- Channel/group change, emergency exit.
- ARS server management through COM Presence Notifier - radio presence, radio on, radio off and last status message received.
- Events Log on Microsoft® SQL Server database.
- Advanced function - Radio check, Radio disable/enable, Radio monitor.

Talk Finder:

- Supports different maps viewers - Mappoint®, GIS with standard Raster maps and/or vector with multiple layers, NavteqAND®, Teleatlas®, Google Earth®.
- Indoor localisation with wireless beacon.
- GPS revert facility.
- GPS position requests by polling or by triggered events defined by the operator.
- GPS data with direction, speed and accuracy circle plotted on the map.
- Dual monitor: Talk Manager and Talk Finder split in separate monitors.

Talk Recorder:

- Digital recording of live radio traffic.

FIND OUT MORE

WEB: www.bpg.it/en/index.php?section=com

FLYER: www.bpg.it/en/sistemi_software/com/pdf/bpg_brochure_com_eng.pdf

PRESENTATION: www.bpg.it/en/sistemi_software/com/pdf/presentation_bpg_com_eng.pdf

ALSO FROM BPG RADIOCOMUNICAZIONI

MARKETS

Public Safety, Emergency Services, Transport Enterprises, Municipal Services.

DISTRIBUTION

EMEA.

LANGUAGES

English, Italian, French.

Other languages available on request.



CONSEL

DISPATCH CONSOLE, GPS MONITORING,
CALL LOGGING, TEXT MESSAGING

ConSEL is a dispatching console with GPS location monitoring, allowing remote management of radios fleet by providing access to the full functionality of MOTOTRBO™ radios and IP Site Connect repeater systems from the control room.

With the ability to display and control the full radio menu and repeater slots on the computer screen in the control room, ConSEL allows the dispatcher to control the fleet without having to use any radio directly.

ConSEL allows group and individual number creation and call setup. It can act as a functional voice recorder with call history and allows transmission of both voice and data.



SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

MOTOTRBO DM and DP series, firmware v1.6.

Computer Hardware / Operating Systems

PC with O.S. Microsoft Windows XP / Vista / Windows 7
Pentium III, 512Mb RAM, Sound card.

Interfaces

USB for connection to a Base Radio, Ethernet for remote connection, Audio.

Other Requirements

Training for authorised partners and service engineers.

KEY FEATURES & BENEFITS

- Enhances overall operational performance.
- Shorter time of response and intervention.
- Improvement of service in the area.
- Reporting and analysis.
- Documentation automatisation.
- Enhances system reliability & security.
- Remote control of radios (DM3XXX,DM4XXX), IPSC repeaters (DR3000,MTR3000).
- Multiple IPSC systems management.
- Voice & data transmission.
- GPS location monitoring.
- Text messaging.
- Channel selection, calls, programmable user button.
- Voice recorder and call history.
- Radio visualisation.
- Configurable status system.
- Telemetry – fuel consumption etc.
- Customised maps, also own raster maps editor.
- Patching (group, individual).
- Base stations voting (RSSI).
- Touchscreen optimised .
- Intercom / chat between Consoles.
- Support PABX connection (SIP).

ConSEL



FIND OUT MORE

WEB: www.aksel.com.pl/product/show/id/74

MARKETS
Public Safety, Municipal Services, Emergency Services, Airports, Government, Utilities, Industry Market (Oil & Gas, Steel Industry), Manufacturing, Warehousing/Logistics.

DISTRIBUTION
EMEA.

LANGUAGES
English, Polish.



DMRALert® ENTERPRISE

COMPLETE SOLUTION FOR ENTERPRISE SAFETY

**DMRALERT®
ENTERPRISE**
OFFERING FULL
CONTROL AND
EFFECTIVE
MANAGEMENT OF
YOUR MOTOTRBO
RADIO FLEET,
DMRALERT
ENTERPRISE
ENSURES THE
SECURITY OF YOUR
ENTERPRISE.

MARKETS

Industries, Prisons, Hospitals,
Data Centres, Shopping Centres,
Skyscrapers, Leisure Centres.

DISTRIBUTION

EMEA.

LANGUAGES

English, French.

DMRALert® ENTERPRISE is a complete dispatcher combining full automatic Indoor & Outdoor tracking, Guard Tour Patrol Management, Job Ticketing, Technical Alarm Dispatching, Lone Worker and Man Down Safety.

DMRALert® ENTERPRISE allows the management of different teams such as technical, security and cleaners, with all radio movements being tracked and recorded throughout the site and stored on the server. Localisation is done via wireless beacons which are battery powered meaning no third party network is required, and GPS. In order to enhance the tracking performance, the option board offers different possibilities to upload information to the server.

Because the system uses different connectors to most Building Management Systems (BMC), Fire Alarm Systems and also single alarms, technical staff are immediately informed when an alarm occurs. Geofencing enables users to check tasks are being completed and if not to generate an alarm, and also alerts users if an unauthorised radio is detected in an area. The Job ticketing functionality enables the creation and dispatch of tasks, and provides a colour-coded report on the dispatcher interface showing the status and progress of tasks.

DMRALERT® ENTERPRISE



SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility
MOTOTRBO.

Computer Hardware / Operating Systems
PC Windows 7 Pro, IP, USBs, sound.

MOTOTRBO System Architecture

Conventional MOTOTRBO, IP Site Connect, Capacity Plus, Linked Capacity Plus, NAI Data.

KEY FEATURES & BENEFITS

- Full automatic Indoor & Outdoor Tracking system.
- Guard Tour Patrol Management (Beacon, RSM/RFID, Wireless/RFID) with email reporting allowing management of different types of tours.
- Intelligent Alarm Dispatcher: connects to most used Building Management Systems, Fire Alarm Systems and hypervisors such as ABB, Siemens, Chubb, Def, Wago, Iologics, Winsup, Intouch, PCVue and MicroSesame.
- Alarms can be sent to radios, phone sets, SMS/GSM, email, relay outputs.
- All information (location of staff, technical alarms...) is displayed on a multi-screen & multi-floor layout Maps GUI.
- IVR included.
- Text to Speech: translates "data" to Voice.
- Acknowledgement, escalation, group management.
- Job Ticketing & Task Management: the different colours of the dispatcher show which tasks are accepted, in progress, late or terminated.
- Lone Worker and safety features on Option Board: Man down, loss of movement, dual transmission of alarm, transmit interrupt. Enhanced transmission of indoor and outdoor locations.
- Manual launch alert (evacuation).
- Dispatcher.
- Voice Recording MP3.
- Visual and audible alarm on PC, the emergency facility is combined with location so you will know the location of the radio in alarm and also the technical alarm on maps.
- Group management, Dynamic group management, Temporary workers.
- Enhanced radio management.
- Text messaging SMS.
- Management of users & their rights.
- Client / Server (IP).
- Full Traceability.

FIND OUT MORE

WEB: www.telecoms.eiffageenergie.com

ALSO FROM EIFFAGE



DMRALert® INTRACK

INDOOR TRACKING SYSTEM

**DMRALERT®
INTRACK**
DMRALERT®
INTRACK
IMPROVES
ORDER AND JOB
MANAGEMENT
AND OFFERS FULL
CONTROL AND
MANAGEMENT OF
YOUR MOTOTRBO
RADIO FLEET.

MARKETS
Shopping Centres, Banks,
Leisure Centres.

DISTRIBUTION
EMEA.

LANGUAGES
English, French.

DMRALert® INTRACK is a powerful dispatcher specifically designed for Shopping Centres, combining full automatic indoor tracking, job ticketing, guard tour patrol management, lone worker and Man Down safety.

It allows the management of different teams such as technical, security and cleaners, with all radio movements being tracked and recorded throughout the site and stored on the server. Localisation of staff is done thanks to wireless beacons which are battery powered meaning no third party network is required, and location is displayed on a multi floor layout map GUI combining staff location and other alarms.

One main application is the use of this data for insurance purpose. It also enables the efficient monitoring of tasks - for instance, the geo-fencing feature can generate an alarm if the toilets have not been visited and cleaned for a specified period. Also, the user is immediately alarmed if an unauthorised radio is detected in an area. The Job ticketing functionality enables the creation and dispatch of tasks, and provides a colour-coded report on the dispatcher interface showing the status and progress of tasks.

DMRALERT® INTRACK



SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility
MOTOTRBO DP4XXX.

Computer Hardware / Operating Systems
PC Windows 7 Pro, IP, USB, sound.

MOTOTRBO System Architecture

Capacity Plus recommended, Conventional, IP Site Connect, Linked Capacity Plus, NAI Data.

KEY FEATURES & BENEFITS

- Full automatic indoor tracking system / real time localisation.
- Guard Tour patrol management.
- Job Ticketing Task Management.
- Lone Worker / Man Down safety.
- Enhanced staff – radio – group management.
- Visual and audible alarm on PC, the emergency facility is combined with location so you will know the location of the radio in alarm and also the technical alarm.
- Group management, Dynamic group management, Temporary workers.
- Geo-fencing.
- Status Management.
- Enhanced radio - staff management.
- Multi floor layout Maps.
- Text messaging SMS.
- Audible & Visual Alarm on Supervisor.
- Management of users & their rights.
- Networking: several Supervisors on IP.
- Full Traceability.

FIND OUT MORE

WEB: www.telecoms.eiffageenergie.com

ALSO FROM EIFFAGE



DMRALert® STREET

ENHANCED GPS TRACKING SOLUTION

DMRALERT® STREET
DMRALERT® STREET IS A MANAGEMENT TOOL ALLOWING USERS TO TRACK A GPS ENABLED MOTOTRBO RADIO FLEET THROUGHOUT A DESIGNATED AREA DOWN TO STREET LEVEL.

DMRALert® STREET is a fleet management and location tracking application ensuring security for outdoor fleets. It allows users to track a GPS enabled MOTOTRBO radio fleet throughout a designated area down to street level. The event log will detail the street names allowing quick reference and easier identification of the users location. The application uses Microsoft MapPoint to display the GPS locations.

DMRALert® STREET facilitates the management of teams, groups, agents or vehicles. Users are immediately notified in emergency situations which, as a result, speed up the response time.

With also the possibility to create activity reports, DMRALert® STREET is particularly well suited for Police Forces, Transportation or Hospitality.

MARKETS

Police, Technical Services, Security Services, SAMU, Ambulance, Transport (school buses, municipalities, taxi), Leisure.

DISTRIBUTION

EMEA.

LANGUAGES

English, French.

DMRALERT® STREET



SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility
MOTOTRBO.

Computer Hardware / Operating Systems
PC Windows 7 Pro, IP, USBs, sound.

MOTOTRBO System Architecture
Conventional, IP Site Connect, Capacity Plus, Linked Capacity Plus, NAI Data.

KEY FEATURES & BENEFITS

- GPS location tracking of MOTOTRBO radios.
- Emergency and Alarm Management; sound and visual alerts, notification reports.
- Easy creation of detailed reports down to street addresses and the address nearest to the person and vehicles, search/management by areas.
- Mappoint, Raster, WGS84, Google™, OSM™, IGN.
- SMS messages.
- Full history of the events.
- Electronic book.
- Access rights management.
- Automatic management of radio fleet and groups.
- Client / Server solution.
- Remote activation / deactivation and listening.
- Email to radio SMS, personalised reports, telemetry.

FIND OUT MORE

WEB: www.telecoms.eiffageenergie.com

ALSO FROM EIFFAGE



DRC9010

COMMAND & CONTROL DISPATCHER

The DRC9010 PC is a control console for MOTOTRBO radio devices providing a comprehensive set of functions for the control of single devices or radio fleets. From this workstation up to four radio devices can be controlled. The DCR9010 governs speech events and TMS – messages (Text Messaging Service) for individual subscribers or groups. Customisation for special performance requirements is available on request.

In addition to the classic operation of one or more control center radio sets for radiotelephony and short texts, the GPS positions supplied by the radio sets are processed. Via a separate window, the dispatcher is informed at any time about the actual configuration of the groups and their current status. Using this list, he can directly communicate to the right subscribers and groups.

DRC9010 provides location and visualisation of the radio fleet and enables communication of tasks via “CallOut”. It also has software statistics and history functions. In case of major events a “mobile control station” can be installed.



SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility
MOTOTRBO DM3xxx series.

If special features e.g. CallOut, RemoteControl, HomemodeDisplay are required, need to activate licence in the infrastructure.

Computer Hardware / Operating Systems

Recommended: HP Hardware 19 “HP Z series / individual HP Proliant series.

Windows 7 (32 bit / 64 bit) or higher.

Windows 7 Embedded.

MOTOTRBO System Architecture

Single Site, IP Site Connect, Capacity Plus, Linked Capacity Plus.


Other Requirements

Recommended: HP Hardware 19 “HP Z series / individual HP Proliant series. Min. Intel Core i5. 4 Gb RAM. Mind. 500 Gb Festplatte (Raid1). Dual Head, Graphic card minimum 1Gb (nonshared RAM).

KEY FEATURES & BENEFITS

- Control of several central office radio devices.
- Administration of single and group calls.
- List for administration of organisations, groups and individual subscribers.
- Dispatch and receipt of text messages.
- Dispatcher functions with status indication.
- Emergency call functionalities.
- Chronological lists regarding speech events and TMS.
- Man Down/Tilt switch.
- Alarm.
- CallOut administration.
- Optional extras: AVL/GIS system for map display, CallOut administration (optionboard DMR910 with CallOut Option is necessary).

DRC9010

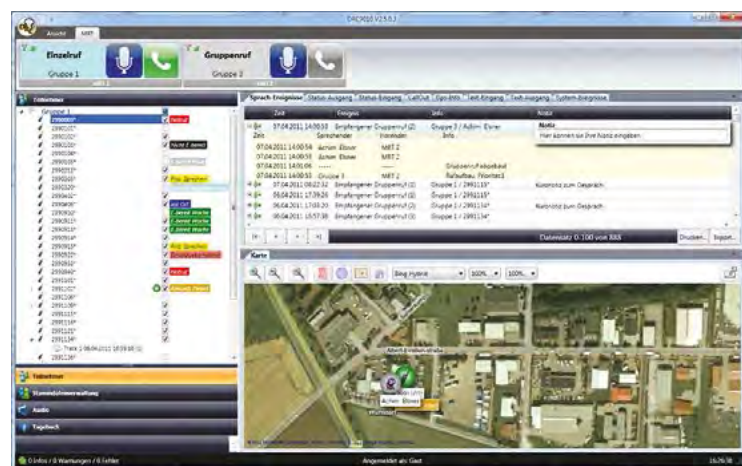

FIND OUT MORE

FLYER: www.atsonline.de/de/downloads/produktinfoblaetter.html

ALSO FROM ATS ELEKTRONIK



EZTRACKER@TRBO™

SIMPLE AVL FLEET TRACKING AND TEXT MESSAGING

EZTRACKER@TRBO™
EZTRACKER@TRBO™ IS A AN EASY TO USE APPLICATION TO MONITOR AT ALL TIMES THE WHEREABOUTS OF YOUR MOTOTRBO FLEET USING GOOGLE MAPS AND CONTACT THEM VIA TEXT MESSAGING. TETHER YOUR BASE STATION TO ANY PC AND USE IT FOR VOICE CALLS AT THE SAME TIME.

eztracker@trbo™ is an application to monitor a fleet using Google Maps and contact it via text messaging. eztracker@trbo™ answers the requests of many customers that are interested in locating their subscribers, without requiring a dedicated server or workstation thus minimising the overall operational costs. It does not require any additional option board or hardware components. eztracker@trbo™ is an entry level fleet tracking and messaging application that brings simplicity of deployment, management and use. It is ideal for situations that require a basic answer to the question “where are my assets now, where have they been and can I exchange text messages with them?”.

eztracker@trbo™ allows users to:

- Visualise the individual position of each radio.
- Monitor if vehicles are heading into traffic and reroute them appropriately.
- Log the location of all assets and play them back.
- Text individual or group of radios.
- Reply or forward messages.
- Maps sharing: users can track the fleet from their browsers or using remote management tools.

MARKETS

Utilities, Taxi Operators, Public Transit, Municipality Operations, Retail Delivery Operations, Tow Truck Operators, Health Services, Security, Transportation, Hospitality Industry, Agriculture, Communications, Construction, Education, Government, Manufacturing, Real Estate, Distribution.

DISTRIBUTION


Worldwide.

LANGUAGES

English, Italian.

Other languages available upon request at no extra cost.

EZTRACKER@TRBO™

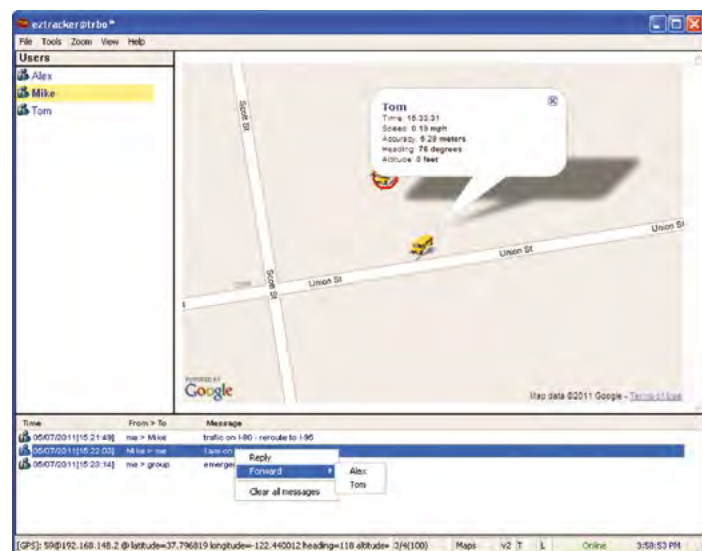

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

Any Motorola MOTOTRBO radio with firmware 1.08.32 and up.

Computer Hardware / Operating Systems

MS-Windows XP / Vista / 7 PC with 1.5GHz CPU and 1Gb RAM, DSL-class internet connection (not required for text messaging).

Interfaces

USB port for MOTOTRBO radio, Ethernet for Internet access.

MOTOTRBO System Architecture

Simplex, Conventional repeater, IP Site Connect, Capacity Plus, Linked Capacity Plus, Enhanced GPS.

Other Requirements

Besides MOTOTRBO CPS programming, basic networking and PC installation skills.

KEY FEATURES & BENEFITS

- Normal or revert GPS configuration.
- Displays up to 200 subscribers.
- Uses ARS for active radio presence.
- Google Maps with optional live traffic.
- Different views and zoom levels.
- Displays radio position, street address, speed, direction and altitude.
- Periodic or immediate location refresh.
- Set period update time for individual radios.
- Radio name aliasing.
- Highlight and center a selected radio on the map.
- Text a talkgroup or an individual radio.
- Log all messages, and reply or forward them.
- Excel-compatible raw GPS data logs (CVS format).
- Rapid deployment.

FIND OUT MORE

DATA SHEET: www.tabletmedia.com/eztracker@trbo.pdf

MANUAL: www.tabletmedia.com/wt/eztracker@trboGuide.pdf

ALSO FROM TABLETMEDIA




HERMESTRX

PROFESSIONAL FLEET MANAGEMENT SYSTEM FOR MOTOTRBO

hermesTRX is a real-time Outdoor Positioning and GPS fleet management system using various mapping platforms including Google Earth. It is configurable through a built-in web server to track and manage vehicles or personnel assets by GPS enabled MOTOTRBO radios. In addition to the location service, a text messaging and email facility are available, as well as the processing of telemetry information. It is available in a number of versions depending on the quantity of subscribers to be tracked – versions are available to track between 20 and 500 subscribers.

hermesTRX now also offers Geo-Fencing, the integration of various digital mapping platforms and direct connectivity for up to 24 MOTOTRBO base radios.

hermesTRX is a truly plug and play system and is very intuitive to set up. Designed as a modular solution, it enables users to upgrade the system with new features or functions. The solution is fully integrated with the hermesTRX Man Down solution further enhancing the safety of the workforce, as well as the Motorola Man Down based on the Generic Option Board.

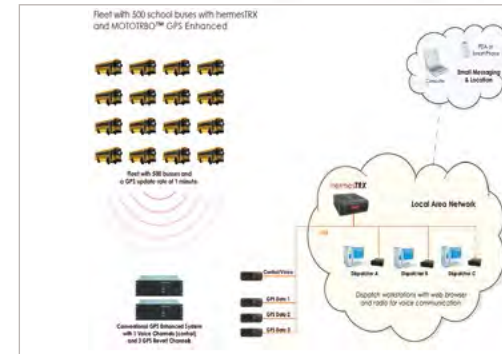HERMESTRX
INFRASTRUCTURE

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

All MOTOTRBO Portables.

Interfaces

hermesTRX is hardware, which fits between the customer's LAN and the MOTOTRBO network. In order to integrate this application, only MOTOTRBO and Ethernet cables are required.

Computer Hardware / Operating Systems

Compatible with operating systems like Windows 7, Vista, XP, OSX, ipad and Linux.

MOTOTRBO System Architecture

IP Site Connect, Capacity Plus, Linked Capacity Plus and Connect Plus.

Other Requirements

hermesTRXplus is hardware, which fits between the customer's LAN and the MOTOTRBO Connect plus Controller. In order to integrate this application, only Ethernet cables are required. There are no complex drives, databases etc to be installed. A normal web browser to set up and use the system is all that is required.

KEY FEATURES & BENEFITS

- GPS Outdoor Positioning.
- Built-in Web Server for Browser based Operation.
- Multi User Access and Remote Facility.
- ARS, Telemetry, Job-Dispatching, Emergency Email.
- Recording and Playback.
- hermesTRXplus supports MOTOTRBO Connect Plus.
- No monthly recurring investment costs (opex).
- Comes with a detailed user set-up manual and example CPS files and associated firmware.
- No monthly recurring investment costs (opex), no costs associated with software, map licences or monthly recurring fees.
- Flexible Mapping Engine, uses the most up-to-date mapping platform, which is free of charge.
- Voice Dispatching for multiple users.
- User-friendly interface.
- Geo-Fencing.
- Supports MOTOTRBO 'Enhanced GPS'.
- A standard web browser is all that is required to set up and use the system. There are no complex drivers, databases etc to be installed.
- Flexible Mapping Engine provides the option of choosing OpenStreetMap, ESRI, Google™ Earth or any customer raster or vectorial tab format maps.
- Reverse Geocoding allows to convert GPS coordinates into street addresses.


FIND OUT MORE

WEB: www.hermestrx.com/?page_id=658

FLYER: www.hermestrx.com/wp-content/uploads/hermesTRX_EMEA.pdf

ALSO FROM HERMES MICROCOM

HERMESTRX

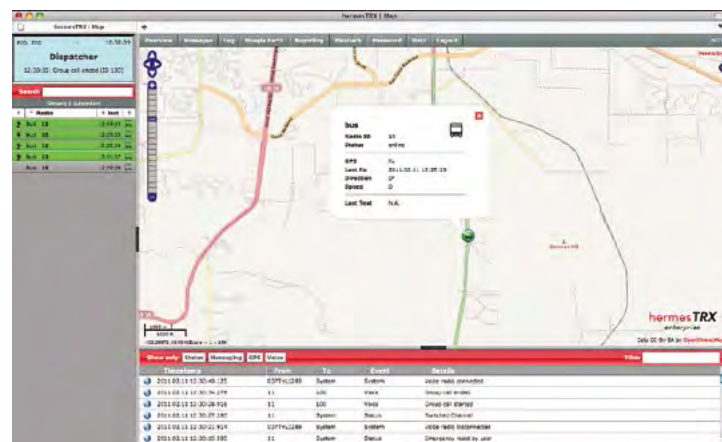

MARKETS

Agriculture, Communications,
Construction, Education,
Finance, Government,
Health Services, Hospitality,
Insurance, Manufacturing,
Mining, Retail, Real Estate,
Transportation, Utilities, Energy,
Security, Military, Taxi, Courier,
Manufacturing, Public Safety.

DISTRIBUTION

Worldwide.

LANGUAGES

English, German,
French, Spanish.



**HERMESTRX
INDOOR &
OUTDOOR**
WITH BOTH
INDOOR TRACKING
AND WIDE-AREA
GPS POSITIONING,
HERMESTRX
ALLOWS A
DISPATCHER
TO TRACK AND
MANAGE ASSETS
AND STAFF
THROUGHOUT
BUILDINGS AND
OUTDOORS
SEAMLESSLY.

MARKETS

Agriculture, Communications, Construction, Education, Finance, Government, Health Services, Hospitality, Insurance, Manufacturing, Mining, Retail, Real Estate, Services, Transportation, Utilities, Wholesale Hospitality, Security, Military, Taxi, Courier, Manufacturing, Power Utilities, Public Safety.

DISTRIBUTION

Worldwide.

LANGUAGES


English, German, French, Spanish.

HERMESTRX INDOOR & OUTDOOR

INDOOR & OUTDOOR POSITIONING SYSTEM FOR MOTOTRBO

HermesTRX Indoor & Outdoor is a real-time indoor positioning and GPS fleet management system using various mapping platforms including Google Earth. It allows a dispatcher to track and manage vehicles or personnel assets by GPS-enabled MOTOTRBO radios. The maximum number of subscribers that are traceable at the same time depends on version, but is typically between 20 and 500 subscribers. It delivers an overview of the location and status of assets: outdoors using GPS, and indoor utilising hermesTRX beacons transmitting a unique ID. Indoor tracking relies on the installation of beacons throughout the various areas of a building or large complex, and fitted inside the MOTOTRBO radio is a transponder indoor option board, which also includes Man Down functionality. A dedicated floor plan upload interface allows users to display floor plans and place beacons on the dispatchers' screen – which also includes a display of emergency situations. Configurable through a built-in web server, it is a true plug-and-play professional system, easy to set-up, also enabling users to upgrade to new features such as the hermesTRX Man Down solution, as well as the Motorola Man Down function based on the Generic Option Board.

HERMESTRX INDOOR & OUTDOOR

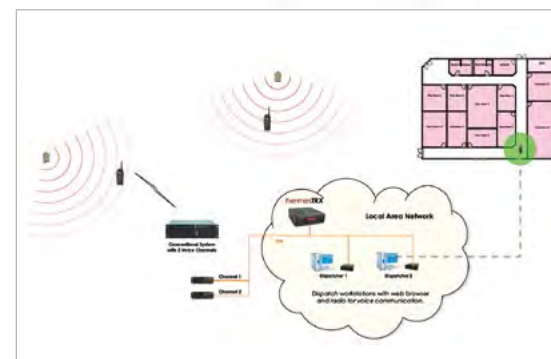

HERMESTRX - INDOOR & OUTDOOR INFRASTRUCTURE

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

All MOTOTRBO Portables.

Interfaces

hermesTRX is hardware, which fits between the customer's LAN and the MOTOTRBO network. In order to integrate this application, only MOTOTRBO and Ethernet cables are required.

MOTOTRBO System Architecture

IP Site Connect, Capacity Plus, Linked Capacity Plus and Connect Plus.

KEY FEATURES & BENEFITS

- Indoor and outdoor positioning.
- Built-in web server for browser based operation.
- Multi-user access and remote facility.
- ARS, Telemetry, Job-Dispatching, Emergency Email, Recording and Playback.
- Voice Dispatching for multiple users.
- Geo-Fencing.
- Comes with a detailed user set-up manual and example CPS files and associated firmware.
- No monthly recurring investment costs (opex), no costs associated with software, map licences or monthly recurring fees.
- Flexible Mapping Engine, uses the most up-to-date mapping platform which is free of charge.
- Supports MOTOTRBO 'Enhanced GPS'.
- User-friendly interface.
- A standard web browser is all that is required to set up and use the system. There are no complex drivers, databases etc to be installed.
- Flexible Mapping Engine provides the option of choosing OpenStreetMap, ESRI, Google™ Earth or any customer raster or vectorial tab format maps.
- Reverse Geocoding allows to convert GPS coordinates into street addresses.

FIND OUT MORE

WEB: www.hermestrx.com/?page_id=914

FLYER: www.hermestrx.com/wp-content/uploads/new_leaflets/hermesTRX_Indoor_EMEA.pdf

ALSO FROM HERMES MICROCOM



KOLIBRI



VERSATILE AND MODULAR CONTROL ROOM SOLUTION

Kolibri is a scalable control room solution for dispatch, map-based tracking and telephony well suited to a variety of markets. Kolibri is a multi-radio platform solution and provides easy integration with telemetry, indoor positioning, video surveillance, incident management systems and other systems.

Kolibri connects to the radio network using an IP-wired interface or over the air using a pool of shared radios. The tracking functionality enables instant situational awareness thanks to a comprehensive geographical overview of the fleet with quick identification and tracking capabilities. Plus many other functions such as geo-fencing and remote control. Kolibri is a fully Computer Aided Dispatch (CAD) solution which effectively manages radio connections and communications with the field through a multitude of call capabilities.

Kolibri is an off-the-shelf product, highly configurable to adapt to any customer situation or process. It is suitable for all sizes of installations that connect to a single radio network or a multitude of radio networks and when required, the system can be extended with extra functionalities and add-on modules.

KOLIBRI INFRASTRUCTURE

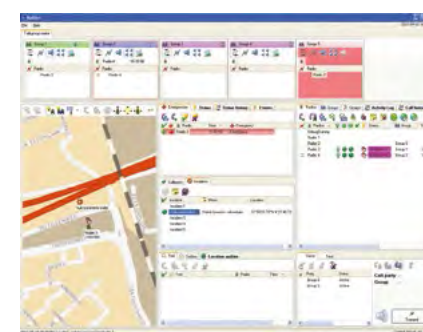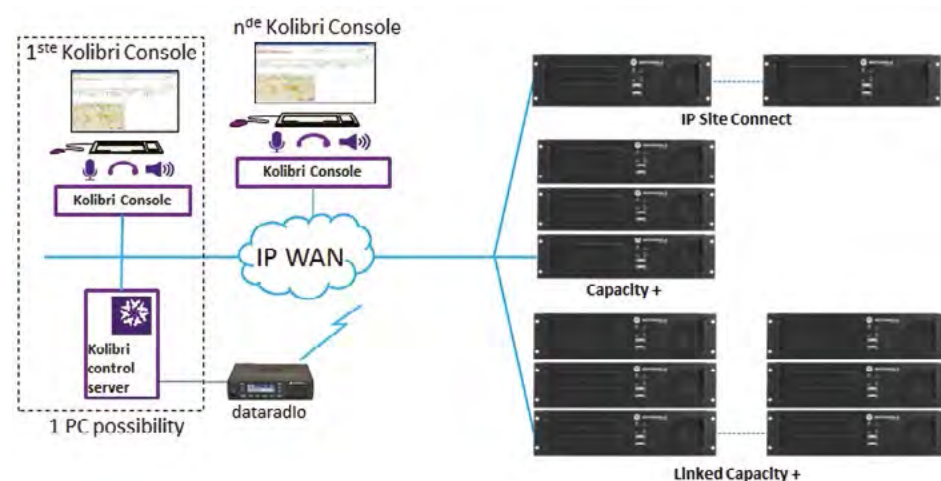

KOLIBRI USER INTERFACE

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

MOTOTRBO radio network with stand-alone or multiple repeaters.

IP Technology

Either IP line connection with radio network infrastructure, or radio connection.

MOTOTRBO System Architecture

Conventional, IP Site Connect, Connect Plus, Linked Capacity Plus.

Other Requirements

Knowledge of Kolibri, IP Infrastructure, Windows OS.

KEY FEATURES & BENEFITS

- Enables communication with field staff through a multitude of call capabilities. Centralised or geographically dispersed control rooms are supported.
- The dispatch and tracking functionalities are fully integrated with each other, e.g. simply click on a radio icon shown on the map to initiate a group or private call.
- Full IP based solution: all voice, audio and signalling information is transported over an IP layer, enabling all IP advantages and Windows support capabilities.
- Also available as a wireless, a hybrid solution or a fully wired solution.
- Scalability: from single console to redundant multi-node WAN configuration.
- Any language can be supported. Currently available in English, Spanish, French, German, Danish, Brazilian Portuguese and Dutch.
- Enterprise logic and customisable GUI supports common radio protocols and overviews.
- Available add-ons and custom developments for multiple radio networks, network enhancements, redundancy options, connection of external systems.

FIND OUT MORE

WEB: www.kolibri-systems.com
BROCHURES: www.kolibri-systems.com/index.php?p=dl

ALSO FROM KOLIBRI SYSTEMS

KOLIBRI
KOLIBRI CAN
WORK WITH THE
OPERATIONS AND
PROCESSES OF
ANY MODERN
CONTROL ROOM.
WITH SCALABLE
OFF-THE-SHELF
AND HIGHLY
CUSTOMISABLE
FUNCTIONALITIES,
KOLIBRI BRINGS
THE STRENGTH
OF DIGITAL
COMMUNICATIONS
TO EVEN THE
SMALLEST
CONTROL ROOMS.

MARKETS

Logistics, Public Safety, Public Transport, Museums, Government Institutions, Security companies, Hospitals, Public Events, Production plants.

DISTRIBUTION

Europe, Latin America, Africa, Asia.

LANGUAGES

English, Spanish, French, German, Danish, Brazilian Portuguese, Dutch.



KOLIBRI LOGGING SYSTEM

LOGGING VOICE & ALL OPERATIONAL DATA – GPS, IPS

KOLIBRI LOGGING SYSTEM
KOLIBRI LOGGING SYSTEM PROVIDES AN EFFICIENT TOOL TO LOG AND REPLAY VOICE AND OPERATIONAL DATA (SUCH AS TEXT MESSAGES, GPS LOCATION AND INDOOR POSITION) FOR TRAINING, INCIDENT INVESTIGATIONS OR REPORTING PURPOSES.

MARKETS

Logistics, Public Safety, Public Transport, Museums, Government Institutions, Security Companies, Hospitals, Public Events, Production Plants.

DISTRIBUTION

Europe, Latin America, Africa, Asia.

LANGUAGES



English, Spanish, French, German, Danish, Brazilian Portuguese, Dutch.

Whether it is for supporting reporting, replay, training purposes or incident investigations, Kolibri is able to log all operational data and to replay all logged information in a user-efficient way.

Being part of the Kolibri Control Room Suite, Kolibri Logging System can either be deployed as a stand-alone module or as part of a complete Kolibri Control Room solution.

Kolibri Logging System enables any type of information to be logged: voice, all user activity, GPS position information and if an IPS is in place, all indoor positions. The application is radio network independent meaning it can be used in combination with a single radio network or to log information of several radio networks at the same time. The logging system also includes the KoliReplay module which provides an easy to use client to replay the logged voice and GPS data. All logged data is protected against modifications and the KoliReplay tool is password protected to prevent unauthorised use.

KOLIBRI LOGGING SYSTEM INFRASTRUCTURE

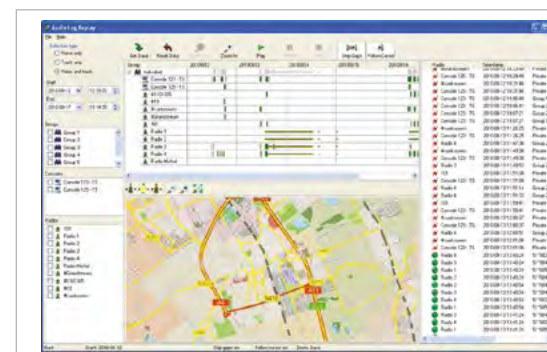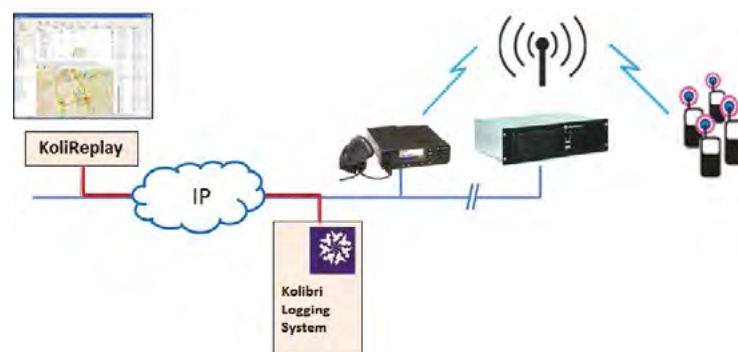

KOLIBRI LOGGING SYSTEM USER INTERFACE

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

MOTOTRBO radio network with stand-alone or multiple repeaters.

IP Technology

Either IP line connection with radio network infrastructure, or radio connection.

MOTOTRBO System Architecture

Conventional, IP Site Connect, Connect Plus, Linked Capacity Plus.

Other Software

KoliReplay.

Other Requirements

Knowledge of Kolibri, IP Infrastructure, Windows OS.

KEY FEATURES & BENEFITS

- Supports TETRA, DMR and Analogue radio networks.
- Fully IP based: the Kolibri Logging System and the KoliReplay application can be located anywhere.
- Logs all types of calls: group calls, private calls, Radio to Radio.
- Logs all operational data: text messages, radio location positions, indoor tracking (IPS).
- SIP support.
- External interface support.
- Reporting.
- Protection of data against unauthorised use.

FIND OUT MORE

WEB: www.kolibri-systems.com
BROCHURES: www.kolibri-systems.com/index.php?p=dl

ALSO FROM KOLIBRI SYSTEMS





MIMER SOFTRADIO

RADIO DISPATCHER

MIMER SOFTRADIO

MIMER SOFTRADIO TAKES TWO-WAY RADIO INTO THE COMPUTER ERA. USERS CAN USE THEIR ORDINARY PC AS A DISPATCHER CONSOLE AND THE OFFICE LAN AND/OR THE INTERNET FOR DISTRIBUTION. THIS OPENS UP POSSIBILITIES FOR COMPLETELY NEW TYPES OF RADIO SYSTEMS AND DISPATCH CENTRES AND WILL SAVE MONEY ON LEASED LINES.

MARKETS

Dispatch Centres for taxi and courier, Alarm Control Centres, Public Safety Dispatchers, Airports, Industrial Control Rooms, Command and Control Vehicles, Ships, Offshore etc..

DISTRIBUTION

Worldwide (30+ countries)

LANGUAGES

English, Swedish, German, Danish and Turkish.


Other languages can be added on-demand.

Mimer SoftRadio is a dispatch software application with remote VOIP technology and logging functions for all types of two-way radio users. Together with network interfaces for different types of radios it connects any radio to IP. The system works both over local LAN and over the Internet with the audio as VoIP. This is a perfect solution for small or medium size dispatch centrals with a mix of radio systems and a mix of local and remote radios.

Mimer SoftRadio gives the dispatcher virtual control heads for each radio type, giving the feeling of "sitting in front of the radio". The dispatcher has full control of the radio keypad and its display. The dispatcher can mix analogue radios with Tetra and MOTOTRBO. Even intercoms and phones can be mixed in the same system.

Each radio dispatcher can handle up to 8 or 30 radios, depending on software size, simultaneously on his computer. And each radio can be controlled by up to 99 dispatchers in parallel. Larger versions are also available.

Mimer SoftRadio

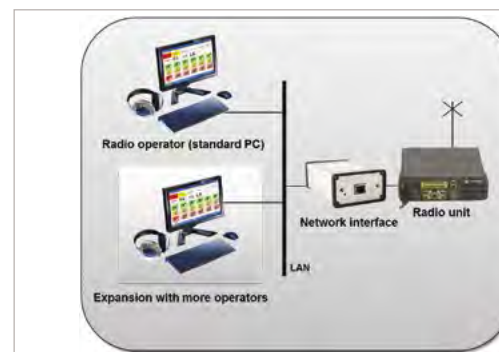

MIMER SOFTRADIO INFRASTRUCTURE

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

DM3600, DM3601, DM4600, DM4601 and their equivalents in other regions.

Computer Hardware / Operating Systems

Standard Windows PC with XP, Win 7, Win 8, ethernet connection, audio card, microphone and speakers or headset.

Interfaces

A basic system needs one software licence per PC and one network interface per radio.

MOTOTRBO System Architecture

The network interface connects to a mobile radio, so it will work with any type of infrastructure.

Other Requirements

Dealer needs to have good knowledge in both radio systems and PC-LANs.

KEY FEATURES & BENEFITS

- Call Dispatcher.
- Call Logging.
- Voice Recorder.
- Remote VOIP Console.
- Cross Patch option.
- Speed dial list.
- External alarm.
- Remote I/O's.
- Phone connect .
- Virtual Control Heads.

FIND OUT MORE

WEB:

www.softradio.se/

FLYER:

www.softradio.se/download.htm

MANUFACTURER:

www.lse.se



SAFEDISPATCH

RADIO DISPATCHER, CONTROL ROOM,
GPS-BASED AVL, TEXT MESSAGING,
EMAIL & TELEMETRY REPORTING



SAFEDISPATCH
SAFEDISPATCH
V4.0 IS ENHANCED
WITH A VARIETY
OF LOCATION
ENABLED FEATURES
MAKING DESKTOP
DISPATCHING
EASIER THAN EVER
BEFORE, ENSURING
EFFECTIVE
MANAGEMENT
AND MONITORING
OF BOTH
PERSONNEL AND
MOBILE ASSETS.

MARKETS

Public Safety, Government, Transportation, Oil & Gas, Taxi and Limousine, Utilities, Public and Student Transportation, Private Security, Municipal Services, Emergency Services, Fleet Management.

DISTRIBUTION

Worldwide.

LANGUAGES


English, Russian, French, Spanish, German, Turkish, Arabic, Romanian, Czech, Chinese, Italian.

SafeDispatch™ is a client-hosted software solution designed for the MOTOTRBO two-way digital radio system delivering effective management and monitoring of both personnel and mobile assets.

SafeDispatch v4.0 data application is a global solution with worldwide map coverage and multiple language capabilities. The benefit of SafeDispatch lies in the seamless integration of its modular components with MOTOTRBO radios. The application is built modularly, so users can choose any of the suites and build a perfectly fitted solution. Users can choose to deploy the Text Messaging, GPS, and Enhanced Reporting Suites one at a time, or mix-and-match them.

The new SafeDispatch™ v4.0 is enhanced with a variety of location enabled features such as a live mapping interface that offers real-time 24/7 critical information about mobile assets around the world.

SAFEDISPATCH

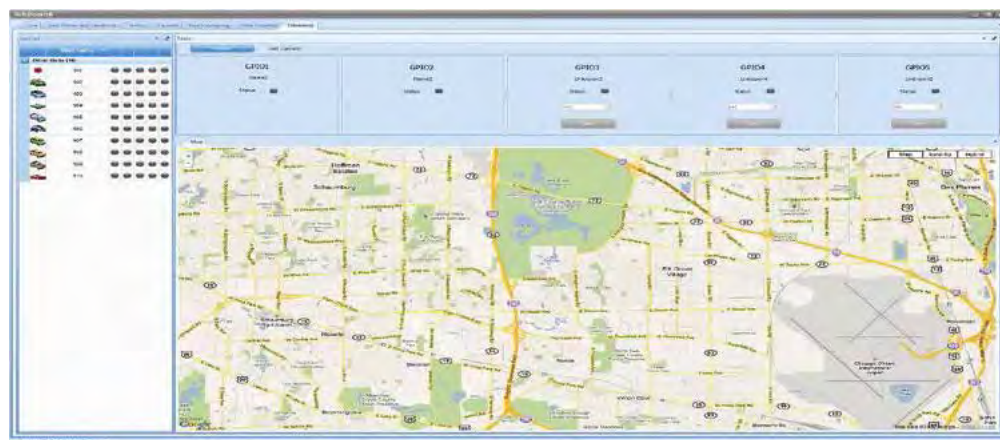

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility
MOTOTRBO 1.8.

IP Technology

TCP/IP Connectivity (LAN, WLAN, VPN).

Interfaces

Operating System:

- Microsoft Windows XP Professional w/Service Pack
- Windows Vista or Windows 7 (both 32 and 64 bit versions).

CPU:

- Intel/AMD 1600 Mhz or greater.

RAM:

- 1.0 Gb or greater.

Hard Drive:

- 40.0 Gb or greater.

Ethernet Card:

- 10/100 LAN.
- RS232 serial port.

Other Requirements

Basic computer and Windows system knowledge.

KEY FEATURES & BENEFITS

- Client-Server Based (web-based solution is available).
- Embedded Radio Solution is sensor compatible.
- Customisable Interface and Multi-Language Capable.
- Integrates with existing radio system.
- Integrates with Student Transportation Software.
- Advanced text messaging allows two-way SMS communication between a radio or group of radios.
- Voice Dispatch: voice call (Private, Group and All Calls) direct to any Radio. Emergency Calls with remote DeKey (for select users).
- Send and receive e-mail messages to your radios.
- GPS Suite: enhanced with a variety of location enabled features including Geo-Fencing and Landmarks.
- Telemetry Suite: visually recognise input/output status of all units at a glance.
- Reporting Suite: receive enhanced reports to analyse and make the most of data collected for all of your fleet vehicles.

FIND OUT MORE

WEB: www.safemobile.com/solution-safedispatch.php

FLYER: www.safemobile.com/data/solutions/1.NI_Brochure.pdf

ALSO FROM SAFEMOBILE



SAFEDISPATCH MOBILE

PROVIDING AN EXTRA TOOL FOR THE FIELD COMMANDERS DURING MISSION CRITICAL SITUATIONS, SAFEDISPATCH MOBILE COMMAND AND CONTROL APPLICATION CAN HELP IMPROVE EFFICIENCY, COORDINATION AND RESPONSE TIMES.

MARKETS

Public Safety, Government, Transportation, Oil & Gas, Taxi and Limousine, Utilities, Public and Student Transportation, Private Security, Municipal Services, Emergency Services, Fleet Management.

DISTRIBUTION

Worldwide.

LANGUAGES

English, Russian, French, Spanish, German, Turkish, Arabic, Romanian, Czech, Chinese, Italian.

SAFEDISPATCH MOBILE

MOBILE COMMAND & CONTROL CENTRE FOR ANDROID CELL PHONES AND TABLETS


SafeDispatch Mobile™ Software provides remote access to MOTOTRBO and TETRA radio fleets via IP networks and is designed primarily to function as an Android-based mobile dispatching centre, with a number of voice and data capabilities.

Various data can be exchanged between multiple Android cell phones or tablets running SafeDispatch Mobile and the radios in the field.

When outside of the radio coverage area, SafeDispatch Mobile can still be used to communicate with the radio system and to remote monitor the radio channels via the IP network.

SafeDispatch Mobile™ software is compatible with SafeDispatch™ Desktop software and can also be used on the radioPad/radioPod field units.

SAFEDISPATCH

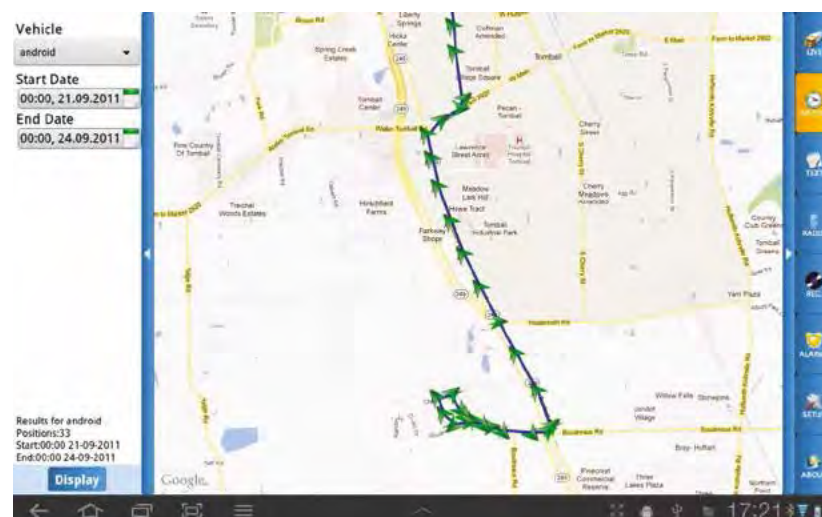

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

MOTOTRBO 1.8.

IP Technology

SafeDispatch 4.0 or higher installed on client server.

Interfaces

Android 2.1 or higher.

Other Requirements

Basic computer and Windows system knowledge.

KEY FEATURES & BENEFITS

- Worldwide GPS Mapping on Google Maps.
- Real-time location information for personal and vehicle tracking.
- Integration of various customised location based services.
- Remote real-time access to your data and historical reports.
- Monitoring and controlling functions for field supervisors.
- Alarm management capabilities.
- Multiple language capabilities.
- Advanced text messaging allows two-way SMS communication between a radio or group of radios.
- Voice call (Private, Group and All Calls) direct to any radio or other radioPad/Pods. Emergency calls with remote DeKey (for select users).
- Send and receive e-mail messages to your radios from any Android cell phone or tablet.
- Variety of location enabled features including Geo-Fencing and Landmarks.
- Telemetry Suite to visually recognise input/output status of all units at a glance.

FIND OUT MORE

WEB: www.safemobile.com/solution-safedispatch-mobile.php

FLYER: www.safemobile.com/data/solutions/2.NI_Brochure.pdf

ALSO FROM SAFEMOBILE



**SAFENET
END-USER**
SAFENET
WEB-BASED
APPLICATION
PROVIDES FLEET
MANAGERS
WITH THE ABILITY
TO EFFECTIVELY
MANAGE AND
MONITOR THEIR
ORGANISATION'S
MOBILE ASSETS
VIA ANY WEB-
BROWSER.

MARKETS

Public Safety, Government, Transportation, Oil & Gas, Taxi and Limousine, Utilities, Public and Student Transportation, Private Security, Municipal Services, Emergency Services, Fleet Management.

DISTRIBUTION

Worldwide.

LANGUAGES

English, Russian, French, Spanish, German, Turkish, Arabic, Romanian, Czech, Chinese, Italian.

SAFENET END-USER

CLOUD-BASED FLEET MANAGEMENT, GPS, AVL, TEXT MESSAGING, E-MAIL SOLUTION

SafeNet™ End-User Edition is a cloud-based software application that enables dispatchers to track their staff and mobile assets in the field while providing them the flexibility to monitor their business at the office or from any computer. SafeNet™ is very easy to use. Users only need to click and enjoy the features offered by the application, including GPS Tracking with Google Maps, Historical Playback, Enhanced Reporting, Email and Unlimited Text Messaging. Subscribers log into a customised web page designated to their specific needs.

SafeMobile hosts, maintains and manages the site and configures your system, installing and testing it on the spot to ensure everything is working properly to provide peace of mind. All updates and enhancements are provided automatically via web updates and are included in the annual maintenance package.

SAFENET END-USER



SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility
MOTOTRBO 1.4.

Computer Hardware / Operating Systems
Microsoft Windows XP Professional w/Service Pack 2.
CPU: Intel/AMD 1600 MHz or greater.
RAM: 1.0 Gb or greater.
Hard Drive: 40.0Gb or greater.
Ethernet Card: 10/100 LAN.
USB: USB 2.0 High Speed, Internet available.

Interfaces

TCP/IP connectivity (LAN,WLAN,VPN).

MOTOTRBO System Architecture

Capacity Plus, Conventional, IP Site Connect & Connect Plus.

Other Requirements

Basic computer and Windows system knowledge.

KEY FEATURES & BENEFITS

- Web-based solution with Smart Phone App.
- Customisable Interface in any language.
- Integrates with Existing Radio System.
- Affordable Monthly Fee.
- Increased Field Personnel Safety.
- Improved Field Communications.
- Access Critical Fleet Information.
- Enhanced Emergency Response Communications.
- Automatic Updates & Enhancements.
- GPS Tracking & Monitoring Information.
- Text Messaging Gateway/Email.
- Voice Communication Management.
- SafePoint® – choose and name symbols for precise location.
- SafeGate® - customise boundaries with extreme detail.
- Event Logging & Alarm Notification.
- Comprehensive Reports.

FIND OUT MORE

WEB: www.safemobile.com/solution-safedispatch-mobile.php
FLYER: www.safemobile.com/data/solutions/3.NI_Brochure.pdf

ALSO FROM SAFEMOBILE



SHORTTRACK GT

AUTOMATIC VEHICLE LOCATION APPLICATION

SHORTTRACK GT
SHORTTRACK GT IS A COST EFFECTIVE AVL SOLUTION FOR SMALL TO MEDIUM FLEETS. EASY TO SET UP, IT CAN SUIT ONE SINGLE OPERATOR WORKING WITH A STAND-ALONE COMPUTER AS WELL AS A LARGE CONTROL CENTRE CONFIGURATION.

ShortTrack is AVL software for small/medium fleets designed to operate over a professional mobile radio (PMR) channel. ShortTrack supports the radio operator, granting the full situation awareness about fleet and force deployment.

ShortTrack keeps the radio operator involved, even in emergency conditions. Automatic management of field information feedback and distance-based contact book sorting ensures efficient fleet coordination.

Due to the variety of communication devices, ShortTrack can be integrated within an existing radio network, localising only the terminals equipped with localisation hardware. User defined markers help to define a fixed radio station or specific points of interest. Using the TrackViewer application, it is possible to perform off-line track and path analysis. Integration with CCTV systems allows direct control of the field.

ShortTrack is a cost effective solution for small to medium fleets and can be as simple as one single operator working with a stand alone laptop computer or a large control centre with several parallel operating positions, running on client server architecture. The native full integration with C.O.di.CE voice and text dispatcher expands the system functions to a complete voice and data solution.

MARKETS

Public Safety (Police, Ambulance, Fire Brigades), Rescue Services, Transportation, Industry market (Oil & Gas, Steel Industry...).

DISTRIBUTION

EMEA.

LANGUAGES

Italian, English.

Other languages on request.



SYSTEM REQUIREMENTS

Computer Hardware / Operating Systems

PC with Pentium® III 700 MHz minimum processor, Microsoft Windows® 2000 or later operating system, 128 Mb RAM, XGA (1024x768) or higher resolution monitor.

Interfaces

RS232 port for conventional radios. USB port for MOTOTRBO radios. Ethernet card for client/server architectures.

MOTOTRBO System Architecture

Direct mode, IP Site Connect, Capacity Plus, Linked Capacity Plus, Connect Plus.

KEY FEATURES & BENEFITS

- AVL for small/medium size fleets.
- Vector data, raster and CAD formats are supported, allowing having always up-to-date maps.
- Two-maps design allows the radio operator to focus on specific zone, keeping the control on the whole working area.
- Off line reports (with TrackViewer).
- Operates as standalone or client-server option.
- Scalable from 1 to many operators.
- Easy to use.
- Affordable.
- Can be integrated with existing network, able to operate on analogue and digital radio networks using any type of terminal equipment (mobile and portable).

FIND OUT MORE

WEB: www.saitel.it

ALSO FROM SAI TEL TELECOMUNICAZIONI



SHORTTRACK LIVE

AUTOMATIC VEHICLE LOCATION APPLICATION

**SHORTTRACK
LIVE**
SHORTTRACK
LIVE AUTOMATIC
MANAGEMENT
OF FIELD
INFORMATION
AND MULTIPLE
USER INTERFACE
DEVICES ENSURES
EFFICIENT FLEET
COORDINATION AT
ANY TIME FROM
ANY DEVICES.

ShortTrack Live is AVL software for small/medium fleets designed to operate over a digital professional mobile radio (PMR) channel using MOTOTRBO radios with built-in GPS. ShortTrack supports the fleet coordinator, granting full situation awareness about fleet and force deployment. ShortTrack Live keeps the fleet coordinator involved, even in emergency conditions.

ShortTrack Live is a one-click-install client/server application. User interface can be any modern javascript enabled web browser. Unlimited connections are allowed to the server, so fleet management can be managed using multiple devices at the same time including PC, tablet, smartphone and SmartTV.

ShortTrack is a cost effective solution for small to medium fleets and can be as simple as one single operator working with a stand-alone laptop computer or a large control centre with several parallel operating positions, running on client server architecture.



SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

Any MOTOTRBO radio with built in GPS enabled.

Computer Hardware / Operating Systems

PC running Microsoft Windows® 8/7/Vista/XP2000 operating systems.

Interfaces

USB port for MOTOTRBO radios. Wired/wireless ethernet card.


MOTOTRBO System Architecture

Direct mode, IP Site Connect, Capacity Plus, Linked Capacity Plus, Connect Plus.

KEY FEATURES & BENEFITS

- AVL for small/medium size fleets.
- Headless client/server application. User interface can be any web browser, running on any device.
- Unlimited client number, sharing information.
- Auto complete contact list using Automatic Registration Service (ARS).
- Multiple live maps supported.
- Offline reports: direct KML export is suitable to perform off-line track and path analysis.
- Shared user defined markers and polygons aid to define fixed radio station or specific points of interest.
- External DBMS (SQL Server or MySQL) can be used to collect and export data to another system.
- Easy to use, zero day training.
- Affordable.
- Multiple base radio & GPS revert channel supported.

SHORTTRACK LIVE

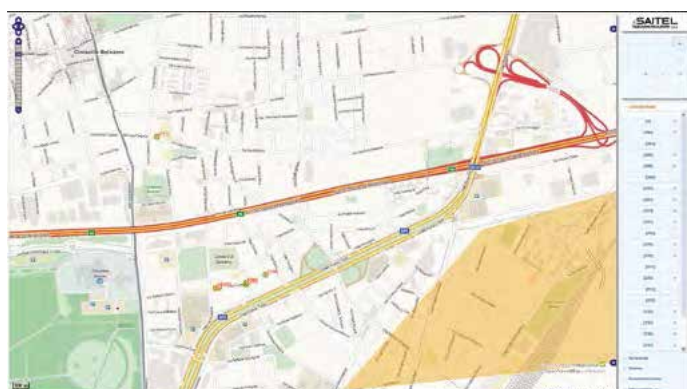

ShortTrack Live

FIND OUT MORE

WEB: www.saitel.it

ALSO FROM SAITEL TELECOMUNICAZIONI




SmartPTT BASIC

MOTOTRBO BASED SMALL LOCAL RADIO COMMUNICATION SYSTEMS

SmartPTT Basic is a software application for small or middle-sized radio communication systems which uses mobile MOTOTRBO base radios as repeaters. The Client-Server architecture of the application enables the implementation of dispatch systems consisting of multiple radio networks and dispatcher consoles.

SmartPTT is able to use either the digital functions of the MOTOTRBO radios or their analogue mode for a step-by-step transition to a DMR system.

SmartPTT Dispatcher Console is the software application installed on a Windows-based PC, which can be located at any distance from the controlled radio networks. The Dispatcher Console connects to SmartPTT Radioservers via IP to perform dispatching functions. SmartPTT Basic Radioserver communicates to radio subscribers through the control stations (MOTOTRBO mobile radios), connected by USB and audio cables.

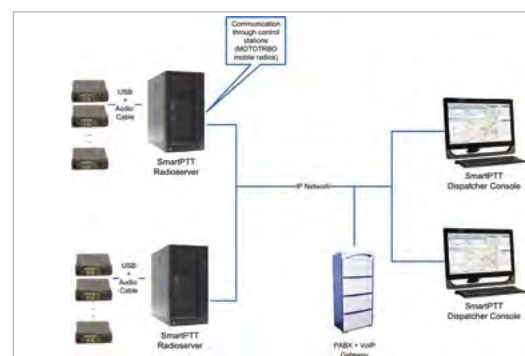

SmartPTT BASIC INFRASTRUCTURE

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

MOTOTRBO radio with firmware 1.08.32 or higher, DM4600/4601 with firmware version R02.00.00 or higher, DP/DM4000 and SL series with firmware version R02.00.00.

Computer Hardware / Operating Systems

PC, Windows XP/Server 2008/Vista/Windows 7, Intel Core i3 or higher, no less than 2 Gb RAM, Sound card (for connecting multiple channels – Multichannel, for example, M-AudioDelta 1010 LT), HDD recommended min 12 Gb (depends on volume of voice records).

Interfaces

Ethernet.

MOTOTRBO System Architecture

Digital conventional, analogue conventional.

Other Requirements

Monitor with resolution 1024x768 or higher (for Dispatcher).

KEY FEATURES & BENEFITS

- Enhanced quality of subscriber monitoring in the network.
- Improved performance discipline of employees.
- Expenses management.
- Personnel safety.
- Rapid response to emergency.
- Elimination of data transmission errors.
- Double call capacity.

Key modules include:

- Radio Dispatch.
- GPS Tracking.
- Web Client.
- Event and Voice Logging.
- Text and Data Transfer.
- Telephone Interconnect.
- Job Ticketing.
- Telemetry.

SmartPTT BASIC
SmartPTT BASIC IS A COST-EFFECTIVE SOLUTION FOR BUILDING SMALL AND MIDDLE-SIZED MOTOTRBO RADIO COMMUNICATION SYSTEMS WITHOUT THE NEED FOR REPEATERS.

MARKETS

Power, Oil & Gas, Manufacturing, Mining, Public Transportation, Public Safety, Emergency Services, Utilities, Hospitality, Education.


DISTRIBUTION

Worldwide

LANGUAGES

Arabic, English, French, German, Italian, Korean, Polish, Portuguese, Russian, Slovak, Spanish.

SmartPTT Basic

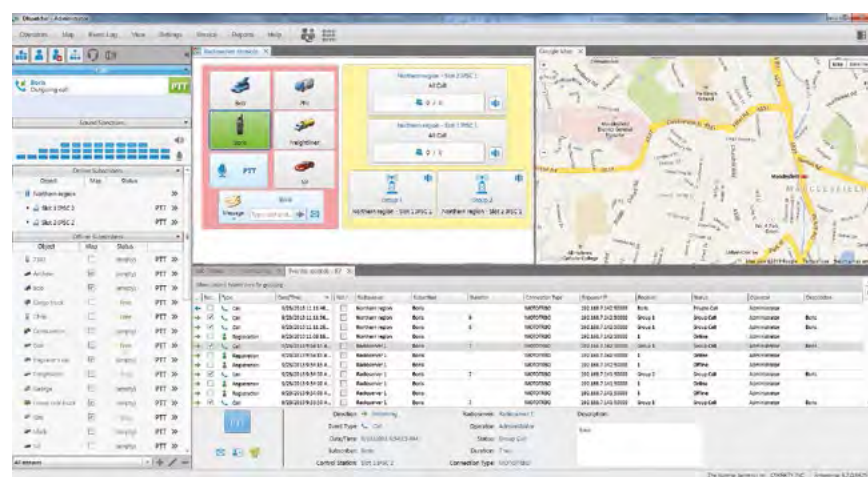

FIND OUT MORE

WEB: www.smartptt.com

FLYER: http://dl.smartptt.com/Brochures/SmartPTT_Brochure_Eng.pdf

VIDEO: www.youtube.com/smartptt

ALSO FROM ELCOMPLUS





SmartPTT ENTERPRISE

MOTOTRBO BASED DISTRIBUTED RADIO COMMUNICATION SYSTEMS

SmartPTT ENTERPRISE

SmartPTT ENTERPRISE IS AN IDEAL SOLUTION FOR DISTRIBUTED MOTOTRBO RADIO COMMUNICATION SYSTEMS BASED ON REPEATERS WHICH PROVIDES A WIDE RANGE OF ADVANCED FEATURES LIKE INFRASTRUCTURE MONITORING, CONNECTION BETWEEN RADIO AND TELEPHONE SUBSCRIBERS, AND BRIDGING BETWEEN VARIOUS TYPES OF RADIO NETWORKS.

MARKETS

Power, Oil & Gas, Manufacturing Facilities, Mining, Public Transportation, Public Safety, Emergency Services, Utilities.

DISTRIBUTION

Worldwide.

LANGUAGES



Arabic, English, French, German, Italian, Korean, Polish, Portuguese, Russian, Slovak, Spanish.

SmartPTT Enterprise software is specifically designed for the implementation of distributed radio communication networks and offers a wide range of features including multi-site or multi-channel systems, trunking or pseudotrunking systems, fully-functional telephone interconnect and also bridging of different types of networks.

SmartPTT Enterprise supports data operations through the MOTOTRBO Network Application Interface for Data (NAI-D) and connects directly to MOTOTRBO repeaters through IP protocol, which makes it an ideal solution for IP Site Connect, Capacity Plus, Linked Capacity Plus, Connect Plus.

SmartPTT is able to use either the digital functions of the MOTOTRBO radios or their analogue mode for a step-by-step transition to a DMR system.

SmartPTT Enterprise

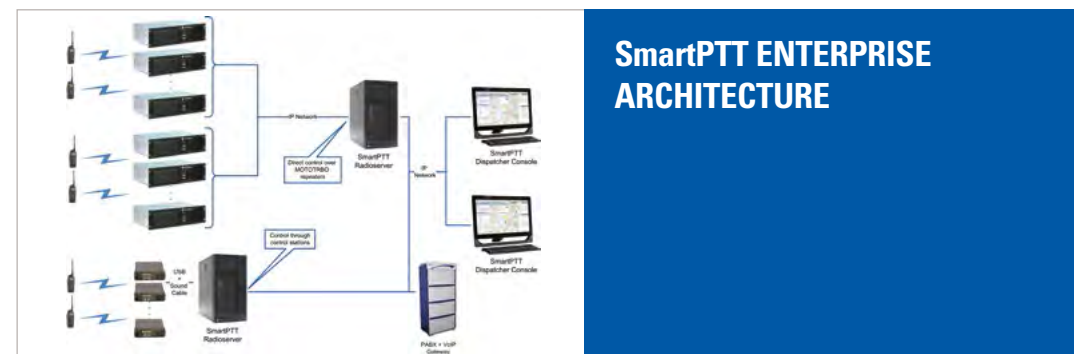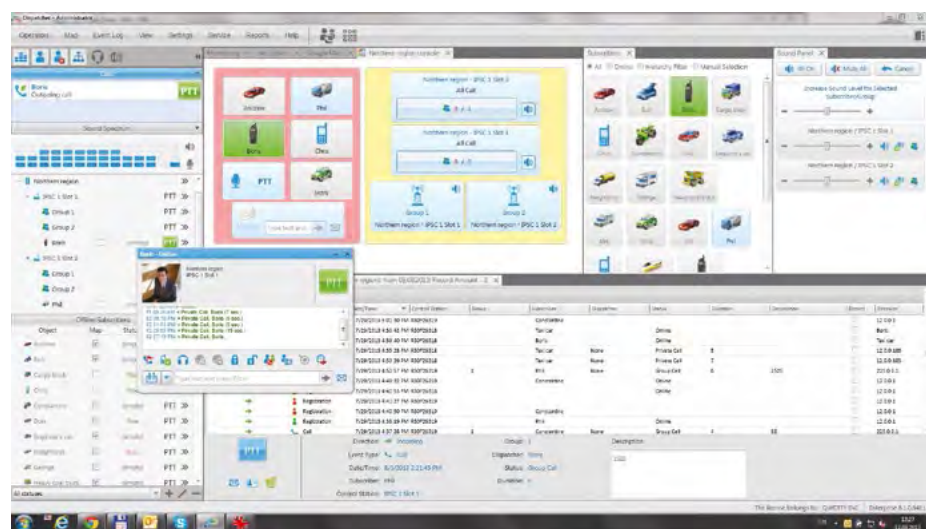

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

MOTOTRBO radio with firmware 1.08.32 or higher, DM4600/4601 with firmware version R02.00.00 or higher, DP/DM4000 and SL series with firmware version R02.00.00.

Computer Hardware / Operating Systems

PC, Windows XP/Server 2008/Vista/Windows 7, Intel Core i3 or higher, no less than 2 Gb RAM, Sound card (for connecting multiple channels – Multichannel, for example, M-AudioDelta 1010 LT), HDD recommended min 12 Gb (depends on volume of voice records).

Interfaces

Ethernet.

MOTOTRBO System Architecture

IP Site Connect, Capacity Plus, Linked Capacity Plus, Connect Plus, Standalone repeater.

Other Requirements

Monitor with resolution 1024x768 or higher (for Dispatcher).

KEY FEATURES & BENEFITS

- MOTOTRBO Network Application Interface for Data (NAI-D) for ARS, GPS, Text Messaging, and Telemetry.
- Direct control over MOTOTRBO systems: IP Site Connect, Capacity Plus, Linked Capacity Plus, Connect Plus.
- Optimised architecture allowing effective dispatching system of any size and topology.
- Cost-effectiveness due to the server infrastructure.
- Rapid deployment.
- Breaks the limit of 15 repeaters per MOTOTRBO IP Site Connect.

Technical features:

- Radio Network Bridging.
- Direct IP Connection to Repeaters.
- Simulcast Support.
- Infrastructure Monitoring.
- Radio Dispatch.
- GPS Tracking.
- Web Client.
- Event and Voice Logging.
- Text and Data Transfer.
- Telephone Interconnect.
- Job Ticketing.
- Telemetry.

FIND OUT MORE

WEB: www.smartptt.com

FLYER: http://dl.smartptt.com/Brochures/SmartPTT_Brochure_Eng.pdf

VIDEO: www.youtube.com/smartptt

ALSO FROM ELCOMPLUS





TELDIO R2R RECORDING™

RECORDING FOR RADIO-TO-RADIO AND PHONE-TO-RADIO TRANSMISSIONS

R2R RECORDING™



R2R IS A SIMPLE RADIO RECORDING SOLUTION THAT ALLOWS NETWORK ADMINISTRATORS TO RECORD, LOG AND PLAYBACK ANY RADIO TALKGROUP CALLS AND PHONE-TO-RADIO CALLS ON THEIR MOTOTRBO RADIO NETWORK.

Radio-to-Radio Recording (R2R) provides customers with additional use of the data gathered from their radio transmissions. The Teldio R2R Recording solution allows network administrators to record, log and playback any group call on MOTOTRBO two-way radio networks. More importantly, this application allows users to record both radio-to-radio and phone-to-radio conversations. The application is very versatile and can monitor both Local and Wide Area Channels. Accessing the radio data is easily done via the intuitive desktop application. Teldio's R2R never records dead air which makes listening to playbacks time efficient. Data is properly logged with detail information to make finding the information easy and effortless.

By recording their radio conversations, companies can later use this information to:

- Increase Customer service assurance by reviewing response actions to client requests.
- Improve training with the use of real-life material and examples.
- Minimise their legal liability by reviewing the radio recordings of specific incidents.
- Significantly improve accountability by reviewing the response of specific workers or talk groups.
- Enhance audit trails with the audio data of radio-to-radio and phone-to-radio communications.

R2R RECORDING SYSTEM ARCHITECTURE

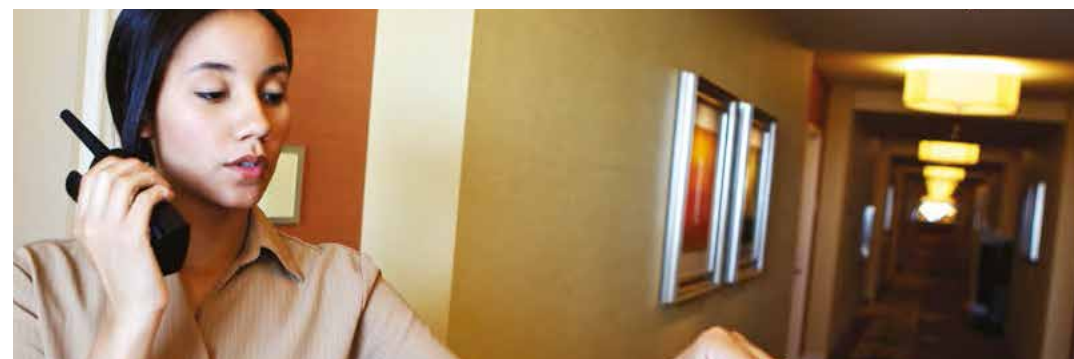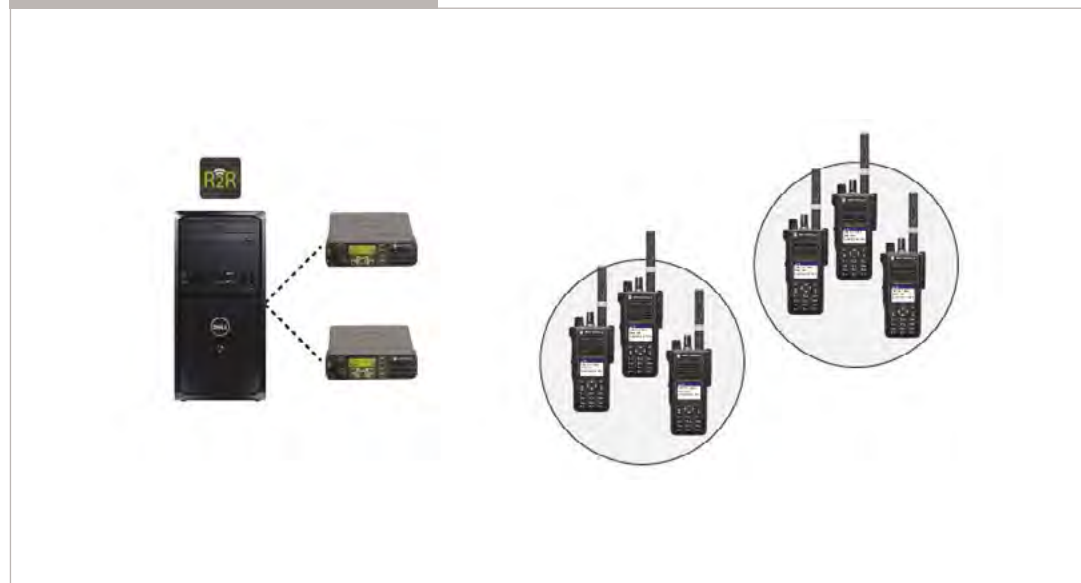

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

1 DM3600 series mobile radio per radio channel and/or radio talk group to be recorded. Radio firmware version 1.08.32 or greater.

Computer Hardware / Operating Systems

PC Dual-core 2GHZ CPU or higher, 4Gb RAM, Windows XP Professional 32 or 64 bit or Windows 7 Professional 32 or 64 bit, 10/100/1000 Ethernet LAN, PCI/PCI-E slots for Sound Cards per recorded channel/talk group.

MOTOTRBO System Architecture

Simplex, Conventional, IP Site Connect, Capacity Plus, Linked Capacity Plus.

KEY FEATURES & BENEFITS

- Intelligent recording: no dead air is ever captured.
- Files are saved in .wav format for easy download and playback.
- Detailed logging information (Channel IS, time and date stamp, file size).
- Records 1000's of hours of audio that can be pushed for backup for archiving and safekeeping.
- Local and Wide Area Channel recording for a flexible solution.
- Intuitive interface for simple navigation.

FIND OUT MORE

WEB: www.teldio.com/products/r2r/

BROCHURE: http://media.teldio.com/collateral/product_collateral/Teldio-R2R-Brochure.pdf

ALSO FROM TELDIO



TEXT@TRBO™



SIMPLE TEXT TO EMAIL GATEWAY

With text@trbo™ radios can send, receive and reply to emails as text messages. text@trbo™ was uniquely designed as a true middleware component: it is very easy to deploy, effective and can run unattended for years. Minimal configuration is required: users only need to enter the email server and the list of email addresses allowed to reach the radios and the application automatically detects control stations and subscribers.

Email is the most popular technology used as the conduit for work orders and alerts from fire alarms, machinery that requires attention and weather reports. It allows users to reach cell phone users via SMS.

text@trbo™ is deployed in hospitality with HotSOS, Guestware, StarGuest, etc. in hotels such as JW Marriott, Hilton, Omni, Starwood, Hyatt, Sheraton, Intercontinental and other chains. Also deployed as a building management system by IBM Maximo and other chains.

TEXT@TRBO™

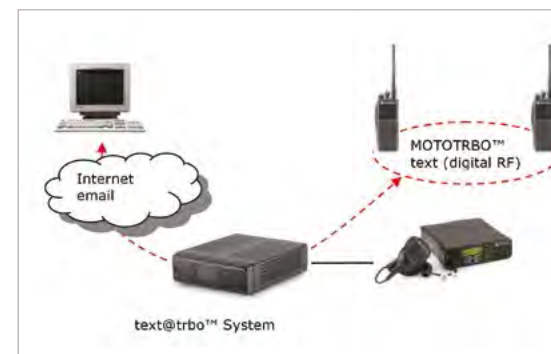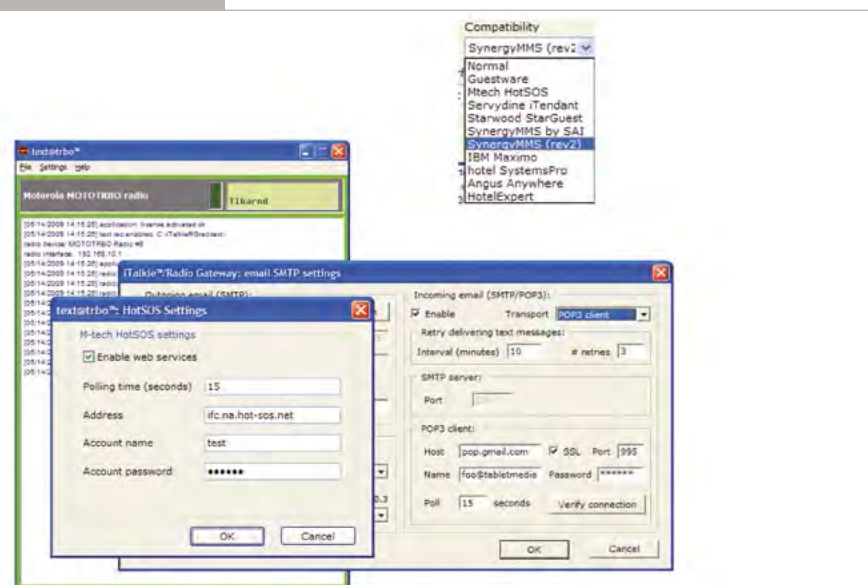

TEXT@TRBO™ INFRASTRUCTURE

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

Any Motorola MOTOTRBO radio with firmware 1.08.32 and up.

Computer Hardware / Operating Systems

MS-Windows XP / Vista / 7 / 8 PC with 1.5GHz CPU and 1Gb RAM, email server (e.g. onsite MS-Exchange or offsite Google Apps, GoDaddy, etc.).

Interfaces

USB port for MOTOTRBO radio, Ethernet for network access.

MOTOTRBO System Architecture

Simplex, Conventional repeater, IP site connect, Capacity Plus, LCP.

Other Requirements

Besides MOTOTRBO CPS programming, basic networking and PC installation skills.

KEY FEATURES & BENEFITS

- Increases employee productivity
- Messaging is inherently faster, more accurate and less obtrusive than voice communications
- Creates a mobile radio-email hotspot by running it on a notebook with a 3G card
- Messages are stored locally and forwarded again if the radio is unavailable
- Private and group messages
- Unlimited number of radios and email users
- Support for up to 24 control stations
- Supports TLS/SSL encryption
- Unlimited message storage
- Automatically starts with Windows
- Thin client with light CPU utilisation
- Bounce back email notification
- Supports Job Ticketing capabilities of SL-series radios
- Supports mixed-mode ticketing on SL and XPR radios

FIND OUT MORE

DATA SHEET:

QUICKSTART GUIDE:

MANUAL:

www.tabletmedia.com/text@trbo.pdf

www.tabletmedia.com/wt/text@trbo_quickstart.pdf

www.tabletmedia.com/wt/text@trboGuide.pdf

ALSO FROM TABLETMEDIA

MARKETS

Hospitality, Utilities, Public Transit, Municipality Operations, Retail Delivery Operations, Tow Truck Operators, Health Services, Security, Transportation, Agriculture, Communications, Construction, Education, Government, Manufacturing, Real Estate, Distribution.

DISTRIBUTION

Worldwide.

LANGUAGES

English.

Other languages available upon request at no extra cost.



TEXT@TRBO PLUS™



CONNECT PLUS TEXT TO EMAIL GATEWAY

With text@trboPlus™ radios can send, receive and reply to emails as text messages. text@trboPlus™ was uniquely designed as a true middleware component: it is very easy to deploy, effective and can run unattended for years.

It requires minimal configuration. Simply enter the email server and the list of email addresses allowed to reach the radios - it automatically detects the subscribers! text@trboPlus™ was specifically designed to support MOTOTRBO radios running on Connect Plus networks. It does not require any additional option board, control stations or hardware components.

Email is the most popular technology used as the conduit for work orders and alerts from fire alarms, machinery that requires attention and weather reports. It also allows you to reach cell phone users via SMS. text@trboPlus is widely used in the hospitality industry, deployed with HotSOS, Guestware, StarGuest, etc. in hotels such as JW Marriott, Hilton, Omni, Starwood, Hyatt, Sheraton, Intercontinental and other chains. It is also deployed with building management system by IBM Maximo and others.

TEXT@TRBO PLUS™

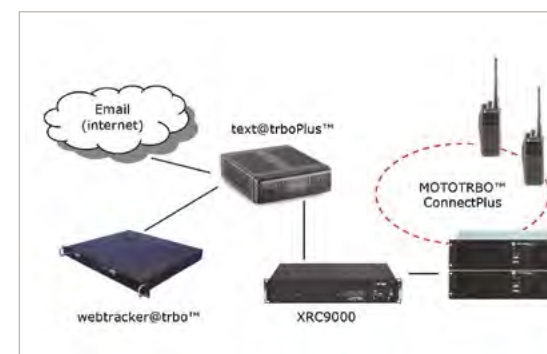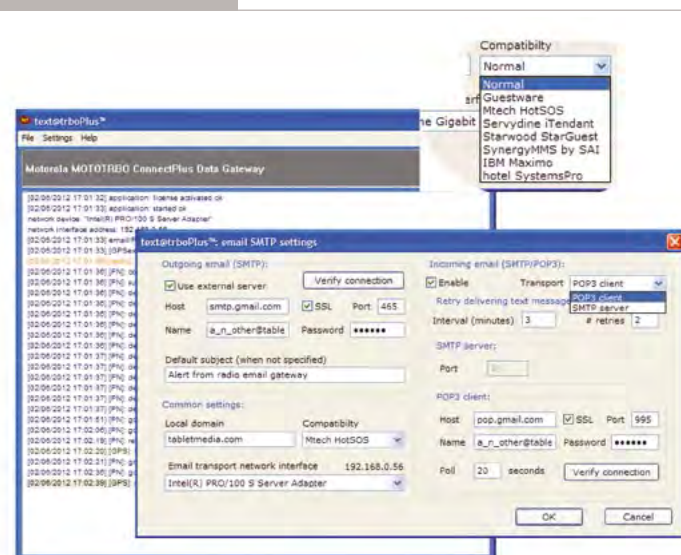

TEXT@TRBO PLUS™ INFRASTRUCTURE

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

MOTOTRBO radio with Connect Plus firmware 1.1 and up.

Computer Hardware / Operating Systems

MS-Windows XP / 7 / 8 PC with 1.5GHz CPU and 1Gb RAM, email server (e.g. onsite MS-Exchange or offsite Google Apps, GoDaddy, etc.).

Interfaces

Ethernet for network access.

MOTOTRBO System Architecture

Connect Plus.

Other Requirements

Besides MOTOTRBO CPS programming, basic networking and PC installation skills.

KEY FEATURES & BENEFITS

- Private and group messages.
- Unlimited number of radios and email users.
- Direct IP interface to XRC9000 controller.
- Supports TLS/SSL encryption.
- Unlimited message storage.
- Automatically starts with Windows.
- Thin client with light CPU utilisation.
- Bounce back email notification.
- Supports Job Ticketing capabilities of SL-series radios.
- Supports mixed-mode ticketing on SL and XPR radios.
- Increases employee productivity.
- Messaging is faster, more accurate and less obtrusive than voice communications.
- Suitable for work order management applications.
- Email can be used to reach cell phone users via SMS.
- Messages are stored locally and forwarded with multiple retries if the radio is unavailable.
- Bounce back email notification.
- No control stations required.

FIND OUT MORE

DATA SHEET: www.tabletmedia.com/text@trboPlus.pdf

MANUAL: www.tabletmedia.com/mt/text@trboPlusGuide.pdf

ALSO FROM TABLETMEDIA

MARKETS

Hospitality, Utilities, Public Transit, Municipality Operations, Retail Delivery Operations, Tow Truck Operators, Health Services, Security, Transportation, Agriculture, Communications, Construction, Education, Government, Manufacturing, Real Estate, Distribution.

DISTRIBUTION

Worldwide.

LANGUAGES

English.

Other languages available upon request at no extra cost.



TRBOnet ENTERPRISE SPECIFICALLY DESIGNED FOR DISPATCH CENTRES THAT MONITOR LARGE AMOUNTS OF TRAFFIC, TRBOnet ENTERPRISE PROVIDES A COST-EFFECTIVE AND POWERFUL SOLUTION FOR VOICE, TEXT, TELEMETRY DISPATCHING AND RECORDING AS WELL AS LOCATION TRACKING AND CONTROL.

MARKETS

Public Safety, Emergency Services, Transport Enterprises, Municipal Services, Police, Security, Taxi, Medical, Transportation.

DISTRIBUTION

Worldwide.

LANGUAGES

German, French, Spanish, Italian, English, Portuguese, Polish, Czech, Russian.

Other languages possible on request.

TRBOnet ENTERPRISE

ADVANCED DISPATCHER FOR ALL MOTOTRBO SYSTEM TOPOLOGIES



TRBOnet Enterprise is a premium PC based client/server dispatcher software application for MOTOTRBO Capacity Plus, Linked Capacity Plus, IP Site Connect and Connect Plus.

The solution incorporates Geo and indoor positioning as well as text messaging, voice recording and telemetry processing. These features provide a complete overview of all station and unit activity for fast problem localisation, job assignment, control and documentation. All data is recorded continuously and stored for an unlimited period and can then be used for further investigation or growth planning.

It supports digital as well as analogue channels that could be helpful for clients during their migration period. It also makes response to emergency quick and effective, and can be used to link multiple agencies or departments at the touch of a button by the dispatcher.

TRBOnet Enterprise can be connected to repeaters directly via IP without the need for any additional hardware (control stations).

TRBOnet ENTERPRISE USER INTERFACE

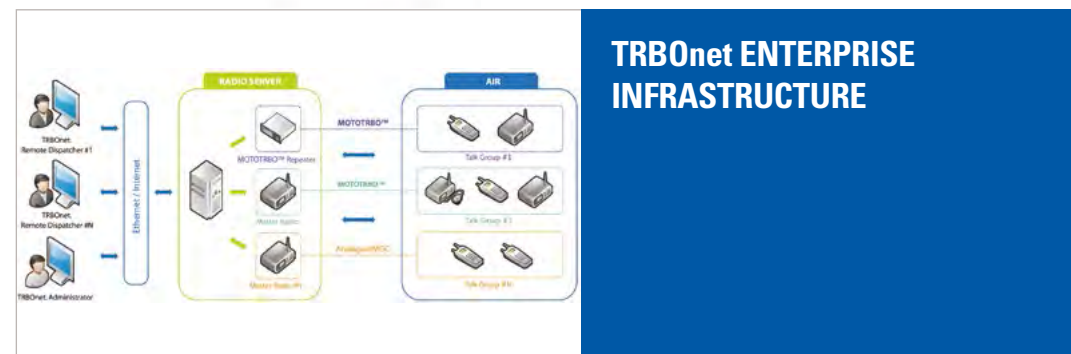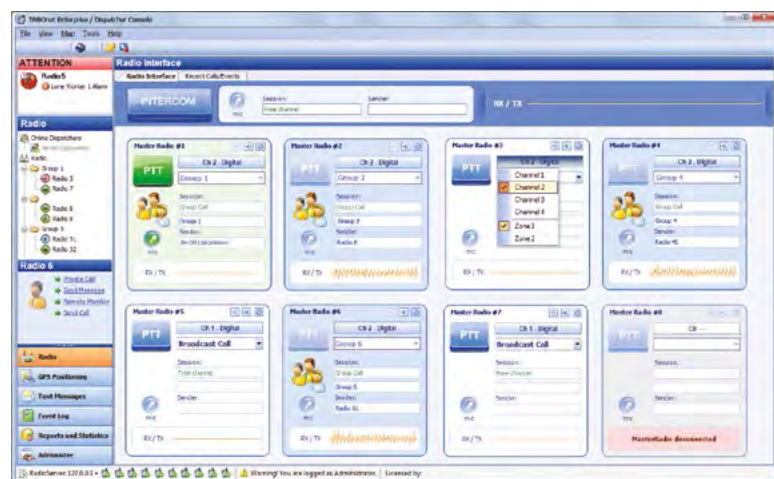

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

MOTOTRBO radio with firmware 1.8 and above.

Computer Hardware / Operating Systems

Windows 7 / Windows 8 / Windows Server.

Interfaces

UDP/IP connection to repeaters or USB cable for Control Radios.

MOTOTRBO System Architecture

Single MOTOTRBO repeaters, IP Site Connect, Capacity Plus, Linked Capacity Plus, Connect Plus.

Other requirements

PC experienced user.

KEY FEATURES & BENEFITS

- True IP VoiceDispatch Console.
- Full Monitoring: Voice, GPS, Text Messages, Telemetry, Data.
- Vector or Raster Maps: Google Earth, OpenStreetMap, Shape, MapInfo.
- Access to the radio network via PC: Multi-user access to Radio Server.
- All channels supported: digital, analogue, MDC, SIP.
- Automation Features: Lone Worker, Stun Kill Passive Mode, Scheduled Text Messages, Email Gateway.
- Voice Communications Management & Voice Recording.
- Cross Patch.
- Intercom.
- Telephone Interconnect.
- ARS Functions + Status Monitoring.
- GPS Positioning on raster or vector maps.
- Telemetry In / Out Support.
- GeoFencing and Speed Control.
- Event Logging, Reporting.
- Data Export Services.

FIND OUT MORE

WEB: www.trbonet.com/productview.aspx?id=10

FLYER: www.trbonet.com/download/materials/TRBOnet_Solutions_Tri_fold_brochure_en.pdf

ALSO FROM NEOCOM



TRBOnet JOB TICKETING

JOB TICKETING SYSTEM FOR SL RADIOS

**TRBOnet
JOB TICKETING**
REDUCING
VOICE TRAFFIC
AND REACTION
TIME, TRBOnet
JOB TICKETING
AUTOMATES TASK
MANAGEMENT,
INCREASING
PRODUCTIVITY AND
STREAMLINING
PROCESSES FOR
BUSINESS-CRITICAL
ENTERPRISES.

TRBOnet™ Job Ticketing enables the 'Job Ticketing' feature for all MOTOTRBO SL radio users. TRBOnet Job Ticketing is an integrated ticketing system which allows dispatchers to create, assign and track job tickets through the radio network. When a radio user receives a task which is displayed in the MOTOTRBO Job Tickets menu (SL radios only), jobs can be accepted or declined by a simple one-button-click or by sending a predefined text message. TRBOnet Job Ticketing's predefined response menu is extremely easy to use and job statuses are customisable meaning they can be adapted for the customer's business. TRBOnet tracks the status of all tickets in real time and notifies the dispatcher if a ticket is about to be overdue.

Workers get an extremely easy control of their tasks with a simple predefined response menu while the Management gets a very effective and user-friendly tool to control business processes. At any time, the dispatcher knows who is working and on what, when the deadline is and how long the job actually took.

MARKETS

Hotels, Transportation,
Emergency Services.

DISTRIBUTION


Worldwide.

LANGUAGES

German, French, Spanish, Italian,
English, Portuguese, Polish,
Czech, Russian.

Other languages possible
on request.

TRBOnet JOB TICKETING USER INTERFACE

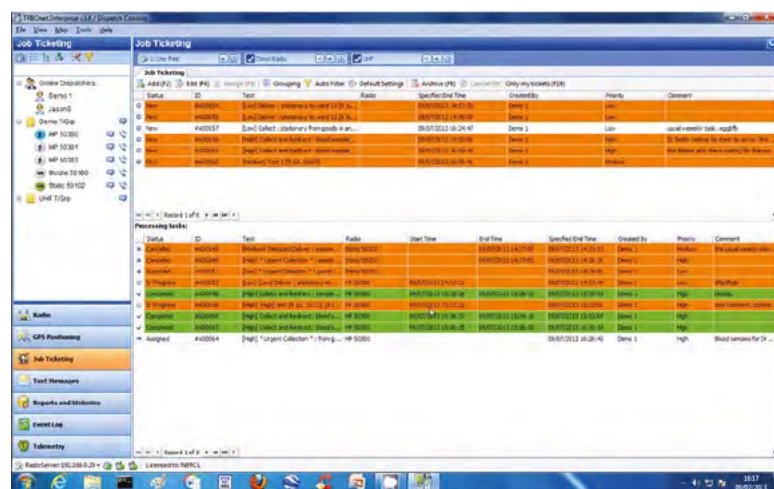

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

MOTOTRBO radio with firmware 1.8 and above.

Computer Hardware / Operating Systems

Windows 7 / Windows 8 / Windows Server.

Interfaces

UDP/IP connection to repeaters or USB cable for
Control Radios.

MOTOTRBO System Architecture

Single MOTOTRBO repeaters, IP Site Connect,
Capacity Plus, Linked Capacity Plus, Connect Plus.

Other Requirements

PC experienced user.

KEY FEATURES & BENEFITS

- Improves business processes.
- Automates job workflow to employees.
- Reduces voice traffic, system usage and reaction time.
- Maximum visibility on jobs.
- Available on SL radios and all full display radios.
- Real-time job tickets tracking.
- Job templates.
- Scheduled jobs (coming soon).
- Task control panel.
- Management Dashboard.
- Job tracking against a deadline.

FIND OUT MORE

WEB: www.trbonet.com/JobTicketing.aspx

FLYER: www.trbonet.com/pdf_files/MOTOTRBO_Job_Ticketing_leaflet.pdf

ALSO FROM NEOCOM



WAVE

WAVE ENTERPRISE COMMUNICATOR IS A WIDELY DEPLOYED APPLICATION WITH THOUSANDS OF CLIENTS IN DAILY USE AROUND THE WORLD SUPPORTING CRITICAL COMMUNICATIONS FOR THE MILITARY, FEDERAL GOVERNMENT AND COMMERCIAL ORGANISATIONS.

MARKETS
Defense, Public Sector, Commercial.

DISTRIBUTION
EMEA.

LANGUAGES
English.

WAVE


MULTI-COMPONENT SOLUTION FOR REAL-TIME, SECURE VOICE AND DATA COMMUNICATIONS OVER IP

WAVE is powerful, versatile communications software that creates communications channels and real-time access to those channels through a variety of end-user applications running on a variety of devices. Using WAVE, organisations have access to real-time, secure communications across any IP-based network. The WAVE suite integrates WAVE Dispatch Communicator, WAVE Desktop Communicator (lighter version of Dispatch), WAVE Web Communicator (web version of Desktop), WAVE Mobile Communicator (an app that is downloadable from any App Store – iOS, Android, Blackberry & Windows Mobile) that 'transforms' a mobile device into a PTT radio.

The WAVE Desktop Communicator is Twisted Pair's most widely deployed application. Intended for system users who do not have dispatch responsibilities, the Desktop Communicator client runs as a standalone Windows programme and allows users to talk on pre-configured channels and patches.

The WAVE Dispatch Communicator provides organisations with advanced VoIP dispatch capabilities at a fraction of the cost of traditional hardware based systems, requiring only an industry-standard PC on which to operate. Dispatch Communicator can display and process unlimited numbers of channels of secure, encrypted audio with mixing, transcoding and instant replay.

WAVE INFRASTRUCTURE

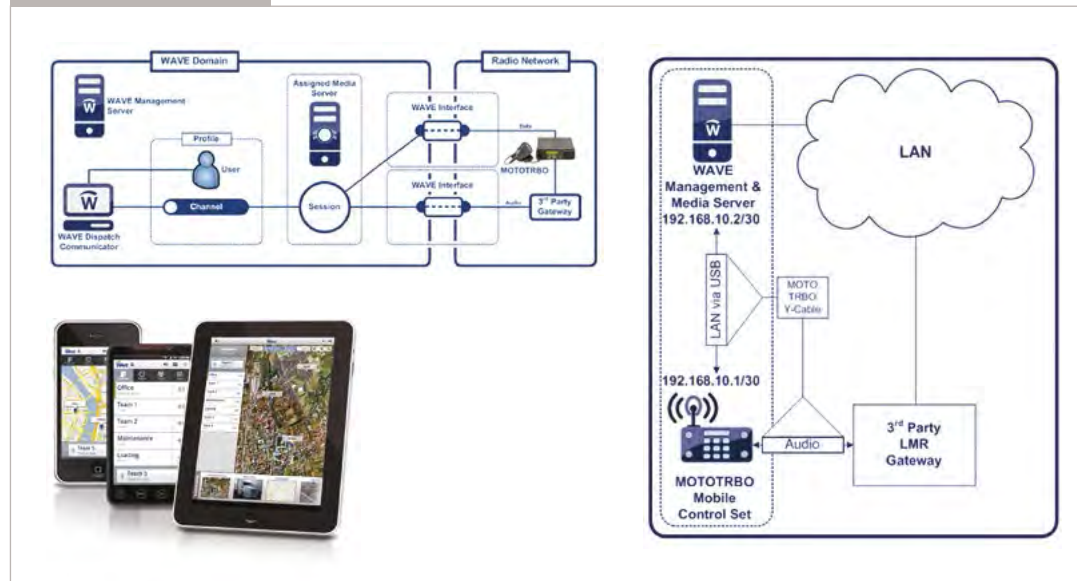

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

DP3400, DP3401, DP3600, DP3601, DM3400, DM3401, DM3600, DM3601.

IP Technology

PC, Internet, Ethernet.

Interfaces

USB and network on the server side for data, Windows PC for the client. The WAVE client will also need speakers, headsets, footswitches, etc, not provided by Twisted Pair. Data only provided in Digital Conventional mode. Audio is supported for Capacity Plus and Connect Plus.

MOTOTRBO System Architecture

Donor radio per talkgroup using a control station, WAVE Dispatch Communicator connects to the WAVE server to get audio and data.

Other Requirements

Training for authorised partners and service engineers.

KEY FEATURES & BENEFITS

- Recognised mobile workforce communications solutions for secure, real-time collaboration on any device, over any network and in any location.
- Integrates instant voice communications with text messaging, location, presence and any other data enabling workforce to connect and collaborate in ways never possible before
- Any devices - smartphones, tablets, desktop PCs and two-way radios - can talk to each other seamlessly.
- Voice-over-IP (VoIP) platform for delivering Radio-over-IP (RoIP) for Land Mobile Radio (LMR) integration and interoperability.
- Can deployed as an on-premise enterprise solution or as a private managed cloud solution providing choice to customers and partners.
- WAVE Mobile Communicators enable users to communicate and collaborate securely with individuals or teams of people on other smartphones, two-way radio networks and in their office environment via PC based applications.
- Desktop and web communication applications unify communications among teams of workers, whether in their office or mobile. WAVE includes applications that are role specific that can be used stand-alone or integrated seamlessly into other popular communication and collaboration platforms.
- Cloud Service for Push-To-Talk Communications securely connect teams of mobile workers with a network independent Push-To-Talk solution for Android, iPhone, BlackBerry® and Windows Mobile devices.
- Solution optimised for integrating and transporting real-time voice, video, text and other vital business information securely over any network with connectivity to two-way radio, telephony and other legacy and modern communication systems.

FIND OUT MORE

WEB: www.twistedpair.com/index/products
VIDEO: www.youtube.com/watch?v=fiW0TPtVIOA
WHITE PAPER: www.twistedpair.com/inc/data/case-studies/20th%20Support%20Command.pdf



WEBTRACKER@TRBO™

CLOUD-BASED AVL FLEET TRACKING

WEBTRACKER@TRBO™

WEBTRACKER@TRBO™ ANSWERS THE REQUESTS OF MANY USERS THAT REQUIRE UBIQUITOUS ACCESS, USERS WITH DIFFERENT ACCESS RIGHTS, AS WELL AS EXTENSIVE HISTORY, REPORTING AND ALERTING CAPABILITIES.

MARKETS

Utilities, Taxi Operators, Public Transit, Municipality Operations, Retail Delivery Operations, Tow Truck Operators, Health Services, Security, Transportation, Hospitality industry, Agriculture, Communications, Construction, Education, Government, Manufacturing, Real Estate, Distribution.

DISTRIBUTION

Worldwide.

LANGUAGES

English.

Other languages available upon request at no extra cost.


webtracker@trbo™ is a browser-based service to track radios. Its strength lies in reliability, the amount of reporting and alerting and the user management capabilities. It is a cloud-based system that interfaces to the radio networks via both the text@trboPlus™ gateway for Connect Plus and iTalkie™/RG gateway for all other networks.

Customers can simultaneously support different type of radio networks and still see their subscribers on one single screen.

Built from the ground up as a cloud server it runs on Linux, is fast, reliable and allows thousands of users.

Within the application, it is possible to create multiple accounts. Each account has its own set of radios which can be assigned to one or more groups such as security and maintenance etc and has multiple users assigned to each group or special access rights.

WEBTRACKER@TRBO™

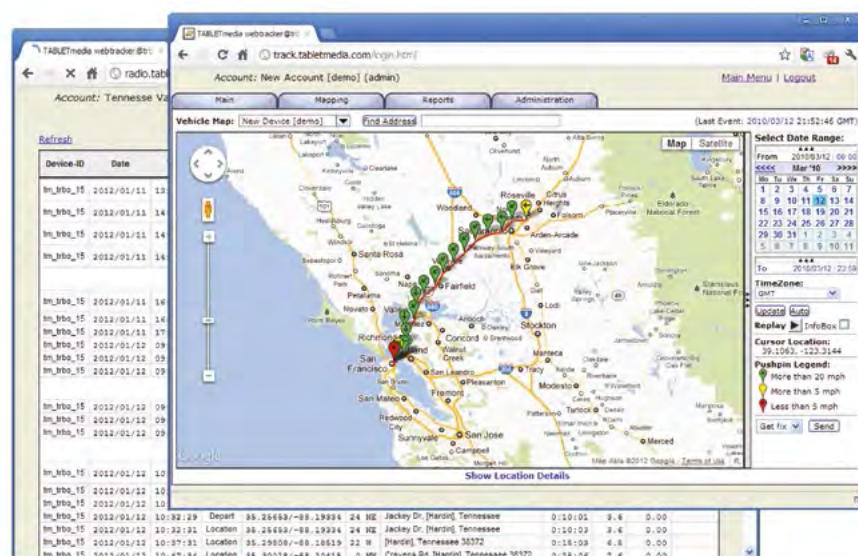

WEBTRACKER@TRBO™ INFRASTRUCTURE

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

Any Motorola MOTOTRBO radio with firmware 1.08.32 and up (1.1 for Connect Plus).

Computer Hardware / Operating Systems

MS-Windows XP / Vista / 7 / 8 PC with 1.5GHz CPU and 1Gb RAM, DSL-class internet connection.

Interfaces

USB port for MOTOTRBO radio (non-ConnectPlus, Ethernet for Internet access).

MOTOTRBO System Architecture

Simplex, Conventional repeater, IP site connect, Capacity Plus, Linked Capacity Plus, Connect Plus, Enhanced GPS.

Other Requirements

Besides MOTOTRBO CPS programming, basic networking and PC installation skills.

KEY FEATURES & BENEFITS

- No upfront investment.
- Comprehensive feature set.
- Simple to deploy.
- Accessible from any browser, iPad and smartphone.
- Simple business model: one-time setup fee and nominal annual per radio fee - gateways, support and maintenance included.
- Desktop-like UI with drop-down menus.
- OpenStreetMaps or Google with traffic.
- Maps of groups or individual radios.
- Animated breadcrumbing.
- Center maps on radio.
- Easy-selectable reporting range.
- Several pre-defined reports.
- Customisable reports.
- Unlimited geofences and geocorridors.
- Flexible and extensive rule-based alerts engine.
- Messaging via email.
- Ready for additional car telematics.
- Export options: Excel, XML, SOAP, etc.
- Multiple foreign languages supported.

FIND OUT MORE

DATA SHEET: <http://tabletmedia.com/webtracker@trbo.pdf>

MANUAL: <http://tabletmedia.com/wt/webtracker@trboUserGuide.pdf>

ALSO FROM TABLETMEDIA



SAFETY



SAFETY

Protect personnel working alone or in hazardous environments with a variety of safety solutions. The “Man Down” application automatically notifies dispatch if the radio falls at a specific angle or if there is no radio activity for a pre-determined amount of time, ensuring workers can get assistance even when they are unable to call for help. For indoor personnel monitoring where GPS won’t work – such as shopping malls or manufacturing plants – new technologies are available to locate and dispatch the closest person, providing better customer service, optimising the use of resources and enhancing safety. Automated alarm management instantly alerts the right person in the event of an incident such as an electrical fault, mechanical failure, fire or panic alarm by sending a text message to a user’s MOTOTRBO radio.

Alarms can be acknowledged and deactivated remotely to reduce unnecessary callouts and data can be stored for historical reference.



B-AQUASAFE

AUTOMATIC MAN-OVER-BOARD ALARM SYSTEM WITH GPS POSITIONING FOR MARITIME PERSONNEL SAFETY


B-AQUASAFE is an automatic man-over-board alarm system for the safety of personnel working at sea. The system relies on a water sensor which is attached to the radio terminal and fitted to the life jacket. For small isolated installations, the system can operate in DMO mode and when operating with a repeater a Central Alarm Unit can be integrated in the solution.

When the sensor is submerged in water, it automatically generates an alarm message which is transmitted to other terminals, stating the alarm type and the identity of the terminal issuing the alarm.

The Central Alarm Unit can receive water alarms from the entire radio network, then dispatch the alarm as email or SMS alarm messages to defined PC's and mobile smartphones. In addition, it can monitor the GPS position of the terminal generating the alarm which can greatly reduce rescue response time. It is also possible to display the GPS position of the device that triggers the alarm on a digital map.

The Alarm Unit can also run system checks to ensure that the B-AQUASAFE system works in accordance with specifications and thereby continuously protects the staff in the safest possible way.

B-AQUASAFE INFRASTRUCTURE

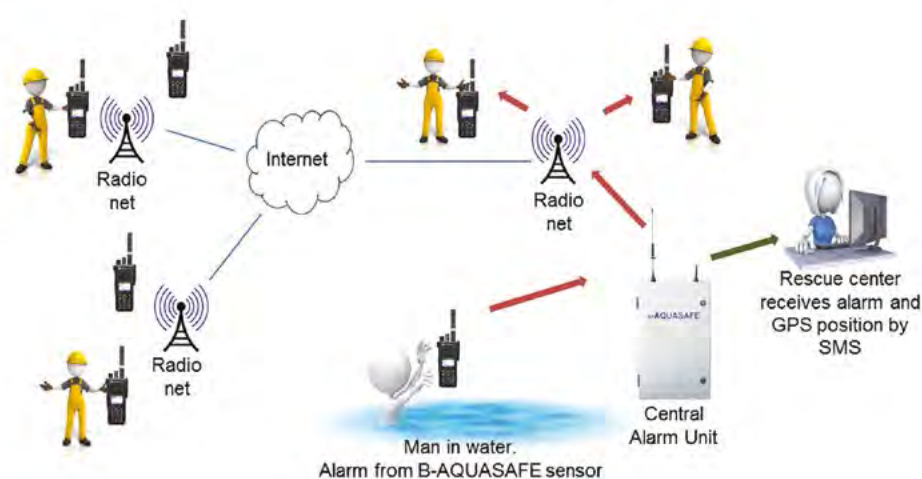

B-AQUASAFE

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

DP34xx/36xx and DP4xxx series terminals.

Computer Hardware / Operating Systems

Touch Screen PC.

Interfaces

MOTOTRBO Telemetry.

MOTOTRBO System Architecture

Direct mode terminals, single base station and IP-Site Connect, Capacity Plus and Linked Capacity Plus.

Other Requirements

It is required that the reseller is able to program MOTOTRBO radios and familiar with the CPS.

A programming guide for the B-AQUASAFE is available.

KEY FEATURES & BENEFITS

- Radio communication and security in the same unit.
- Can be used in both salt and fresh water with no need for calibration (self-calibrating).
- Water sensor does not need a separate battery.
- Water sensor is impervious to rain. The alarm will not activate, even during heavy rain.
- Custom life jacket with radio pocket.
- Can send alarm directly to the rescue center by SMS.
- Sends alarm to colleagues via radio terminal.
- Alarming terminal sends the GPS signal.
- The alarm unit has a built-in, safety tested, interactive touchscreen.

FIND OUT MORE

WEB: www.datamatik.no

B-AQUASAFE
DELIVERING
IMMEDIATE AND
AUTOMATIC
ALARM MESSAGES
TO DEFINED
USERS WITH
GPS POSITIONS.
B-AQUASAFE IS
THE SAFEST AND
MOST RELIABLE
SECURITY SYSTEM
FOR PERSONNEL
WORKING AT SEA.

MARKETS

Maritime Industry - Aquaculture, Offshore Wind Farms, Ports, Shipping, Fish Farming, Coastal Fishing Fleet.

DISTRIBUTION

Worldwide.

LANGUAGES

English.

Alarm messages can be in local languages.



BPG TRBOPLUS GPS DATA LOGGER

OPTION BOARD FOR GPS DATA LOGGER

BPG TRBOPlus is an option board specifically designed for MOTOTRBO radios, portable or mobile, with the aim of extending the standard radio functions. TRBOPlus GPS Data Logger is an option board which adds to the standard MOTOTRBO radios the possibility to store GPS positions in an internal flash memory and then to export data in GPX or KMZ format. Measurements are done automatically by a programmable timer and independently from the channel personality or network coverage.

A simple user interface allows the operator to start and to stop data logging or to know the memory occupation. Multiple sessions can be stored and parallel downloading is possible. TRBOPlus GPS Data Logger adds the possibility to acquire GPS data more frequently and even if the radio is out of network coverage. A typical application is search and rescue missions: few GPS reports are sent over the air while detailed tracks are stored locally and downloaded at the headquarters.

BPG TRBOPLUS GPS DATA LOGGER



SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

DP3601, DM3601, DP4801, DM4601 radios.

Computer Hardware / Operating Systems

Windows 7/8 with installed Motorola USB drivers for programming and downloading RSSI/GPS data.

Interfaces

Motorola USB programming cable.

KEY FEATURES & BENEFITS

- GPS info on radio display of the local or remote radio (over the air LRRP request).
- 5 tone signaling (encode and decode).
- FFSK signaling (tx on and tx off, radio on, ptt id, call, status etc).
- GPS datalogger: stores detailed GPS tracks in an internal flash memory for post downloading via USB (tracks exported in std. GPX or KMZ format for Google Earth).
- Man Down (optional).
- TRBOplus option board can work in analogue and digital mode.
- TRBOplus has been designed to be cost-effective and for low power consumption.
- On request, the functionality of TRBOplus can be personalised.

FIND OUT MORE

WEB: www.bpg.it/en/index.php?section=trboplus

FLYER: www.bpg.it/en/soluzioni_bpg/trboplus/pdf/TRBOPLUS_GPS_Data_Logger_eng_lowres.pdf

ALSO FROM BPG RADIOCOMUNICAZIONI

MARKETS

Government and Enterprise, Fleet Dispatching, AVL, Public Transportation, Taxi Companies, Emergency and Rescue, Security.

DISTRIBUTION

Worldwide.

LANGUAGES

English.



DMR910

OPTION BOARD FOR MAN-DOWN AND ISM-MODULE (RX/TX)

DMR910
THE OPTION
BOARD DMR910
EXPANDS THE
MOTOTRBO
DP3000 RADIOS
BY ADDING
ADVANCED
EMERGENCY
CALL FUNCTIONS
THANKS TO A
MAN-DOWN AND
MOTION SENSOR.

The option board DMR910 expands the DP3000 MOTOTRBO radio series with additional emergency call functions thanks to a Man Down and motion sensor. The DMR910 can be used in variety of situations to ensure safety and monitoring of lone workers such as security guards and prison supervision, plant security and security against theft of mobile properties. The Man Down sensor recognises changes in state and motion. Both functions, which may be activated individually or combined, release the emergency call scheme as programmed in the device.

In conjunction with the optional ISM function, a guard control system can be deployed.

Optionally the DMR910 receives signals from ISM beacons and transmits them as detected checkpoints to the Real-Time Guarding software RTG6000. These ISM beacons ISM762 from ATS Elektronik are built into the object. As they are either battery or electric operated, they are network-independent. As soon as an activated DMR910 is within reach of an ISM beacon it receives its individual ID and automatically transmits it to the RTG6000.

MARKETS

Security Agencies, Prisons,
Factory Security Officers.

DISTRIBUTION

Worldwide.

LANGUAGES

English, German.

DMR910



SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

MOTOTRBO DP3400/01, DP3600/01.

IP Technology

PC with USB-Port, MS Windows XP.

Interfaces

DMR9100 programming software, Motorola programming cable PMKN4012.

MOTOTRBO System Architecture

Single Site, IP Site Connect, Capacity Plus,
Linked Capacity Plus.

KEY FEATURES & BENEFITS

- Man Down and motion sensor for motion and state recognition.
- No movement (motion alert).
- Theft alert in case of motion.
- ISM-Interface (889MHz) to Indoor-Radio-Localisation.
- Communication with guardiX-ISM.
- Real time guarding.
- Programmable function of Man Down and triggering angle.
- Pre-alert via radio loud speaker.
- Call out.
- Transmission of GPS position as a function of events (eg emergency call button).
- Special User Functions.

FIND OUT MORE

WEB: www.atsonline.de/en/mobile-radio/mototrbo/applications/dmr910.html

FLYER: www.atsonline.de/en/downloads/product-flyers.html

ALSO FROM ATS ELEKTRONIK



DMR915

OPTION BOARD FOR DP4000 SERIES, MAN-DOWN, CALLOUT, ISM-MODULE

DMR915
THE NEW OPTION BOARD DMR915 EXPANDS THE MOTOTRBO DP4000 RADIOS BY ADDING ADVANCED EMERGENCY CALL FUNCTIONS THANKS TO A MAN-DOWN AND MOTION SENSOR.

The option board DMR915 expands the functionality of the MOTOTRBO DP4000 series by providing emergency call functions such as the Man-Down sensor. The Man Down sensor recognises changes in state and motion. Both functions, which may be activated individually or combined, release the emergency call scheme as programmed in the device.

Optionally, the DMR915 receives signals from ISM beacons and transmits them as detected checkpoints to the RealTimeGuarding software. These ISM beacons ISM762 from ATS Elektronik GmbH are built into the object. As they are both battery or electric operated, they are network-independent. As soon as an activated DMR915 is within reach of an ISM beacon it receives its individual ID and automatically transmits it to the RTG.

DMR915 is applicable for lone workplace monitoring.

MARKETS

Security Agencies, Prisons, Factory Security Officers.

DISTRIBUTION

Worldwide.

LANGUAGES

English, German.

DMR915



SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

MOTOTRBO DP4000 series.

Computer Hardware / Operating Systems

PC with USB-Port, MS Windows XP, MS Windows 7.

Interfaces

DMR9150 programming software, Motorola programming cable PMKN4012B.

MOTOTRBO System Architecture

Single Site, IP Site Connect, Capacity Plus, Linked Capacity Plus.

KEY FEATURES & BENEFITS

- Man Down and motion sensor for motion and state recognition.
- No movement (motion alert).
- Theft alert in case of motion.
- ISM-Interface (889MHz) to Indoor-Radio-Localisation.
- Communication with guardiX-ISM.
- Real time guarding.
- Programmable function of Man Down and triggering angle.
- Pre-alert via radio loud speaker.
- Call out.
- Transmission of GPS position as a function of events (eg emergency call button).
- Special User Functions.

FIND OUT MORE

FLYER: www.atsonline.de/de/downloads/produktinfoblaetter.html

ALSO FROM ATS ELEKTRONIK



DMRALERT® GT
DMRALERT® GT
ENABLES ALL
SECURITY DUTIES
TO BE MANAGED
FROM ONE CENTRAL
POINT IN REAL-
TIME. PROVIDING
REAL-TIME
STAFF LOCATION
INFORMATION,
ALERTS AND
VOICE TRACKING,
IT ENSURES STAFF
SECURITY AT ALL
TIMES.

MARKETS

Safety, Security Services,
Industry, Shopping Centres,
Data Centres, Banks, Hospitals,
Leisure Industry, etc.

DISTRIBUTION

EMEA.

LANGUAGES

English, French.

DMRALert® GT

REAL-TIME GUARD TOUR PATROL MANAGEMENT

DMRALert® GT is a full real-time Guard Tour Patrol Management solution featuring pre-defined patrol routes management and real-time staff location, for full automatic staff management with network back-up.

DMRALert® GT application can be set up using 3 different devices: RSM/RFID, Wireless/RFID and Beacons. It is possible to combine the different devices to design customised solutions that will fit with any customer requirements. Whether utilising wireless beacon or RFID checkpoints locations are logged and recorded in real-time with the MOTOTRBO radio ID.

The application can then deliver real-time information of the patrols on the customer map, along with alerts, voice tracking, etc, all backed up with full reports and statistical information. Detailed pdf reports of guard tours are created automatically and are sent to the board by email. The software offers 3 levels of tours monitoring, in order to maximize flexibility. A full automatic connection between GT and the radio is available to help the patroller and give him latest information regarding his tour at any time.

DMRALERT®GT



SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

MOTOTRBO, DP4xxx.

Computer Hardware / Operating Systems

PC Windows 7 PRO, IP, USB, Sound.

MOTOTRBO System Architecture

Conventional MOTOTRBO, IP Site Connect, Capacity Plus, Linked Capacity Plus, NAI Data.

KEY FEATURES & BENEFITS

- Real Time Guard Tour Patrol Management.
- Devices: RSM or Wireless RFID reader, BEACON (mix possible).
- Lone Worker & safety management with Automatic dispatch of Alarm.
- Supervisor GUI: Multi floor layout maps.
- Management of Free, Programmed and Mixed patrols.
- GT to/from radio hand shake.
- Voice tracking on PC.
- Full Traceability – Statistics.
- Automatic Edition of Guard Tour report, transmission by Email.
- Text messaging SMS.
- Group management.
- Status management.
- Full Radio control: Activate/deactivate/listening to.
- Multi-PC: Client/Server Supervisor.

FIND OUT MORE

WEB: www.telecoms.eiffageenergie.com

ALSO FROM EIFFAGE



**HERMESTRX
MAN DOWN**
WORKING
'SILENTLY' IN THE
BACKGROUND, THE
HERMESTRX MAN
DOWN SOLUTION
LET USERS USE
THEIR RADIO AS
NORMAL WHILE
ENSURING THEIR
SAFETY AND QUICK
RESPONSE IN CASE
OF EMERGENCY.

MARKETS

Government and Enterprise,
Guard Control, Hospitality,
Education, Security, Military,
Utilities, Taxi, Courier,
Transportation, Manufacturing,
Power Utilities, Public Safety.

DISTRIBUTION

Worldwide.

LANGUAGES

English, German.

HERMESTRX MAN DOWN

GPS BASED MAN DOWN AND LONE WORKER SYSTEM FOR MOTOTRBO

hermesTRX Man Down is a hardware and software solution for MOTOTRBO portable radios that provides an effective Lone-Worker monitoring system. The hermesTRX Man Down solution is an important addition to worker safety programmes. It provides lone-workers and workers in hazardous environments with a mean to call for help in the event of emergency and automatically generates alarms in the event of a man down. The hermesTRX Man Down solution is extremely flexible and can be tailored to customer specific applications.

The hermesTRX Man Down board works 'silently' in the background enabling the user to utilise his portable radio as normal. Voice calls and data messaging are available just as before, however should the radio be placed at an 'unusual' angle, the radio will emit a pre-warning tone to the user. Should the user not correct the angle of the radio, the radio will automatically send out an emergency alert notification.

hermesTRX Man Down is fully integrated with the hermesTRX fleet management application or can also be deployed standalone.



SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

All MOTOTRBO Portables.

KEY FEATURES & BENEFITS

- Includes an option board which fits into the expansion slot of the MOTOTRBO radios.
- Man down software can be loaded on the hermesTRX option board or the Generic Option Board supplied by Motorola.
- Lone Worker.
- Man Down: radio automatically sends out an emergency alert notification.
- Hot Mike in case of emergency.
- Guard Control.
- Emergency voice call.

FIND OUT MORE

WEB: www.hermestrx.com/?page_id=125

ALSO FROM HERMES MICROCOM



HERNING SAFETY M.D.

LONE WORKER SECURITY, LOSS OF VERTICALITY, MAN DOWN


HERNING SAFETY M.D.
HERNING SAFETY M.D. PROVIDES A WIDE RANGE OF APPLICATIONS FOR SETTING UP AND CONFIGURING ALARMS ENSURING EFFICIENT RESPONSE TO EMERGENCY EVENTS OR ALERTS AND WORKERS SAFETY AT ALL TIMES.

The addition of an option card in the MOTOTRBO terminals can greatly increase their functionality. Herning SAFETY M.D. is a set of firmware applications designed for the security of lone workers. Hosted on the option card, Herning SAFETY M.D. applications include the detection of loss of verticality, no movement alert, free fall test and the radio link test.

A complete programming software including supporting documentation makes it easy to deploy Herning SAFETY M.D. applications. The applications are loaded on the option cards that are designed and manufactured by Motorola (PMLN5496AS (Dx3xxx) and PMLN5718AS (Dx4xxx)), ensuring seamless integration into the MOTOTRBO terminals and conformity with the RTTE, ROHS standards and Motorola recommendations such as temperature and reliability.

An optional RFID tag reader and optional indoor localisation beacons will be available soon.

HERNING SAFETY M.D INTERFACE

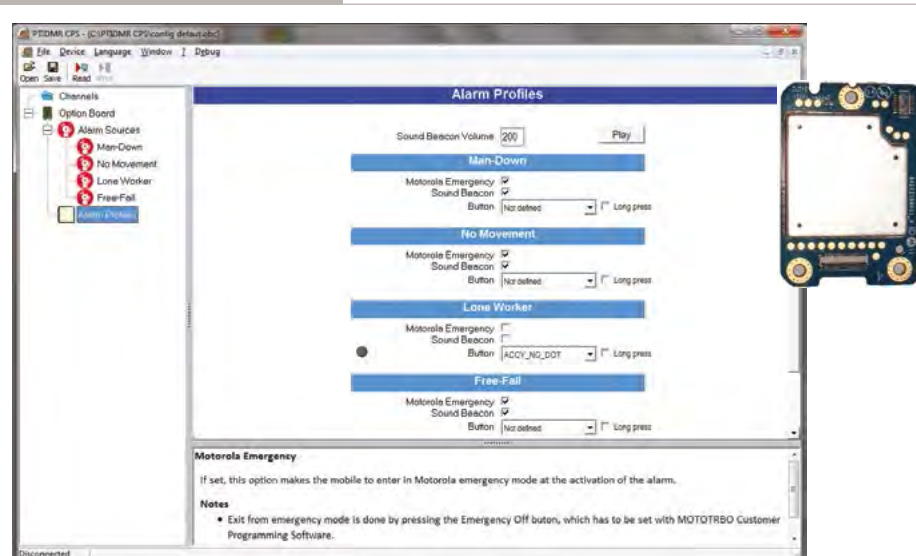

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

MOTOTRBO since version R1.08.00 (DP/DM3000) or R2.04.01 (DM/DP4000).

Computer Hardware / Operating Systems

PC Windows 7 XP/Seven.

MOTOTRBO System Architecture

MOTOTRBO Analogue channel, Direct Mode, conventional, IP Site Connect, Capacity Plus, Linked Capacity Plus, Connect Plus.

KEY FEATURES & BENEFITS

Available alarms:

- Loss of verticality adjusting cone angle, delay and early warning detection, alarm and text displayed, dynamic calibration power.
- No movement, timing, alarm and customisable text. Ability to associate the alarm conditions for the loss of verticality (logical AND).
- Sudden fall: detection of rapid acceleration. Possible to set the range of detection.
- Safe link test: verifications of the radio link with the security base and of the user activity. On the fixed terminal, a test function will signal if a radio is no longer reachable.
- Telemetry: three inputs can be managed and combined to trigger an alarm (e.g. opening safety deposit box and engine running).

Actions in response to alarm conditions:

- Emergency mode is enabled: no need to have computer equipment for alarm processing.
- A loud beep location may be issued to facilitate the search for the victim.
- A simulation of pressing a button allows a large number of possibilities (phone call, activation output telemetry etc).

FIND OUT MORE

WEB: www.herning.fr

ALSO FROM DATAHERTZ



K-TERM44

THE K-TERM44 OPTION BOARD PROVIDES MAN DOWN, BEACON RECEIVER FOR IN-HOUSE LOCALISATION, SELECT 5 DECODING AND ENCODING FOR SPECIAL APPLICATIONS.

K-TERM44

OPTION BOARD FOR DP/DM4XXX RADIOS - SELECT 5, MAN DOWN AND IN-HOUSE LOCALISATION

The K-TERM44 is an option board that can be fitted on the following radios: portable radios DP440x, DP460x and DP480x and mobile radios DM440x, DM460x and DM480x.

The following options are available on the K-TERM44 option board:

- Man Down sensor.
- Beacon receiver for in-house localisation.
- Select 5 decoding and encoding for special applications.

On analogue channels, the K-TERM44 is a select 5 decoding and encoding module with Man Down alarm functionality. On digital channels the following alarms can be set: Man Down, no movement, lone worker, telemetry input lines, manual alarm. It can be used for in-house localisation. Signals from beacons are detected (K-TERM70) and position is sent to the base.

Programming the functionality is easy thanks to the K-TERM CPS program. Once the option board is installed in the radio, and the radio attached to the PC with the Motorola USB cable, the CPS program allows users to set all parameters and save them in the option board. When a new option board firmware is released, it can be uploaded to the option board using the same CPS programme.

K-TERM44



SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

DP440x/DP460x/DP480x and DM440x/DM460x/DM480x.

Computer Hardware / Operating Systems

Windows 2000/XP/VISTA with installed Motorola USB drivers for connecting the DMR radios.

Interfaces

USB programming cable from Motorola.

Other Requirements

After installing the option board in the radio, the Motorola dealer must be equipped with the tools to restore the radio to become truly watertight. The necessary tools and information are available from Motorola.

KEY FEATURES & BENEFITS

- Lone Worker alarm.
- Man Down alarm.
- No movement alarm.
- Telemetry input line alarm.
- In-house localisation.
- Universal Option Board.
- 5-Tone Signaling.
- Console for analogue mode.
- All buttons programmable for encoding sequences.
- Customised options.

FIND OUT MORE

WEB: www.kilchherr.com

FLYER: www.kilchherr.com/page.php?id=sfhe7

ALSO FROM KILCHHERR ELEKTRONIK



K-TERM70

BEACON TRANSMITTER FOR IN-HOUSE LOCALISATION

The K-TERM 70 beacon transmitter is used in in-house localisation systems. It transmits unique identifying information together with additional service information.

The beacon is configured with the K-TERM Set-up Programme which allows users to set up the transmission power level and the transmission interval. Depending on the mounting position, the range is reliant on the adjusted power level and is between 0.5 metres and 25 metres. The battery supports operations for up to three or more years, depending on the transmission settings and the type of battery installed.

The standard case is a robust ABS case which is IP65 approved. The mounting screws are outside of the electronic chamber.

K-TERM70



SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

Radio with option board K-TERM42 or K-TERM44.
All radios DP3xxx and DP4xxx.

Computer Hardware / Operating Systems

Windows 2000 / XP / VISTA with installed Motorola
USB drivers for connecting the DMR radios.

Interfaces

K-TERM programming box for configuring and
updating K-TERM70.

KEY FEATURES & BENEFITS

- Beacon transmitter with battery.
- Battery life up to 3 years or more.
- Easy installation.
- Range programmable from 0.5 metres up to 25 metres depending on mounting position and building.
- IP65 (IP67 on demand).

FIND OUT MORE

WEB: www.kilchherr.com

FLYER: www.kilchherr.com/page.php?id=sfhd8

ALSO FROM KILCHHERR ELEKTRONIK



TELDIO MAN DOWN NOTIFIER™

MAN DOWN NOTIFIER APP FOR LONE WORKER SAFETY

TELDIO MAN DOWN NOTIFIER™
MAN DOWN NOTIFIER IS A COST-EFFECTIVE AND POTENTIALLY LIFE SAVING WAY OF DETECTING IF A WORKER HAS HAD A FALL OR ACCIDENT. USING THE INTEGRATED ACCELEROMETER ON THE MOTOTRBO OPTION BOARD, MDN MONITORS WORKERS BY DETECTING A LACK OF MOVEMENT, A HORIZONTAL TILT OR A COMBINATION OF BOTH.

MARKETS

Hospitality, Natural Resources, Manufacturing, Utilities, Education and Building Management.

DISTRIBUTION

North America (NA), Latin America (LACR), Europe/Middle East/Africa (EMEA), Asia Pacific (APAC).

LANGUAGES

English.

Man Down Notifier (MDN) assures proactive surveillance of employee well-being and dispatches automatic emergency notifications to the appropriate response individuals or groups when an MDN alarm is triggered.

The application has a unique flexible design that ensures that employees are proactively monitored without affecting their job performance. When powering on an MDN-enabled radio, the application renews its “point of reference” — the vertical axis it considers 0°. MDN also alerts the worker that MDN has been triggered by a visual and audible pre-alarm. The worker then has a configurable lapse of time to dismiss the pre-alarm. These features significantly reduce the number of false alarms MDN detects. The parameter timers of the application are customisable for each individual worker. This enables administrators to change MDN settings to truly fit the needs of their radio users. Workers are also given additional flexibility of use with MDN’s sleep mode, as the application can be disabled for a certain period of time to accommodate for breaks and meetings.

TELDIO MAN DOWN NOTIFIER™



TELDIO MAN DOWN NOTIFIER™ INFRASTRUCTURE

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

1 DM3600 series mobile radio per monitored/alarm dispatched radio channel, 1 Motorola Expansion Card per subscriber, Motorola firmware version 1.08.32 or greater.

Computer Hardware / Operating Systems

PC Dual-core 2GHZ CPU or higher, 4Gb of system RAM, Windows XP Professional 32 or 64 bit or Windows 7 Professional 32 or 64 bit, 10/100/1000 Ethernet LAN.

MOTOTRBO System Architecture

Simplex, Conventional, IP Site Connect, Capacity Plus, Linked Capacity Plus.

Other requirements

PC Savvy; Knowledge of MOTOTRBO CPS configurations.

KEY FEATURES & BENEFITS

- Intelligent man down detection algorithms to detect when a worker is in need of help.
- Man Down alarm audio beacons to help locate workers.
- Man Down pre-alarms to allow users to cancel false alarms.
- Sleep mode to temporarily disable Man Down detection.
- Configurable parameters for motion, tilt, pre-alarm and sleep mode timers.
- Automatic emergency notification to the appropriate group or individual when Man Down alarms are triggered.
- Different communication devices can simultaneously receive the Man Down alarm notifications when paired with ACS.
- Server-based software enhances the robustness of the solution and prevents false alarms.
- Complementary operation alongside RBX +Plus on the same MOTOTRBO expansion card.
- Fully compatible with Teldio’s application portfolio.

FIND OUT MORE

WEB: www.teldio.com/products/mdn

BROCHURE: http://media.teldio.com/collateral/product_collateral/Teldio-MDN-Brochure.pdf

ALSO FROM TELDIO



TRBOMOVE

MAN DOWN/DEAD MAN OPTION BOARD FOR DP3000 AND DP4000 SERIES

TRBOMOVE is an option board providing Man Down and dead man features for portable MOTOTRBO 3000 and 4000 radio series.

Using a built-in 3-axis accelerometer, TRBOMOVE monitors radio movements and triggers an emergency procedure when abnormal situations arise. The Man Down and anti-movement functions allow the users to programme alarms to generate emergency call if a radio remains unmoved or tilted for longer than the defined duration of time. Both functions can be used together or separately. The additional local alarm function facilitates finding a radio in a noisy environment.

TRBOMOVE provides advanced features for improving the safety of radio users who work alone, in isolated environments or hazardous areas. The option board low consumption means that the radio can still be used for a whole shift without the need to recharge the battery.

TRBOMOVE can run on Saitel TRBOWAX or Motorola GOB option board making it compatible with 3000 and 4000 series radios.. Although it was developed for portable radios, it can also be fitted in mobile radios.

TRBOMOVE

TRBOMOVE PROVIDES KEY LONE WORKER FUNCTIONALITIES INCLUDING MAN DOWN, DEAD MAN, LOCAL ALARM, EMERGENCY CALL SETUP - IMPROVING THE SAFETY OF RADIO USERS WORKING ALONE, IN ISOLATED OR HAZARDOUS ENVIRONMENTS.

MARKETS

Public Safety (Police, Ambulance, Fire Brigades), Rescue Services, Transportation, Industry (Oil & Gas, Steel Industries).

DISTRIBUTION

EMEA.

LANGUAGES

Italian, English.

Other languages on request.



SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

Radio Hardware: any MOTOTRBO 3000 or 4000 series portable radio .

KEY FEATURES & BENEFITS

- Provides key lone worker functionalities: Man Down, dead man, local alarm, emergency call setup.
- Seamless integration with Motorola MOTOTRBO 3000 and 4000 series radios.
- Suitable for radios with and without display.
- Digital mode supported.
- Low consumption meaning the radio can still be used for a whole shift without the need to recharge the battery.
- Can run on Saitel TRBOWAX or Motorola GOB option board.

FIND OUT MORE

WEB: www.saitel.it

ALSO FROM SAI TEL TELECOMUNICAZIONI



TRBOnet INDOOR
TRBONET INDOOR
IS A COMBINED
INDOOR, GPS,
TEXT AND
VOICE DISPATCH
SOLUTION.

MARKETS

Prisons, Industry, Shopping
Centres, Banks, Hospitals,
Mines, Skyscrapers.

DISTRIBUTION

Worldwide.

LANGUAGES

English, German, French,
Spanish, Italian, Portuguese,
Polish, Russian.

Other languages possible
on request.


TRBOnet INDOOR

INDOOR LOCALISATION SYSTEM FOR MOTOTRBO

TRBOnet Indoor is a software and hardware system that allows positioning and control of digital MOTOTRBO subscribers indoors where GPS satellite navigation system signals are unavailable.

TRBOnet Indoor solution includes: Beacon (Transmitter), Option Board with antenna (Receiver) and TRBOnet software. The beacon transmitter K-TERM 70 is designed especially for the TRBOnet Indoor Localisation System. It transmits unique identifying information together with additional service information. The beacon range is from 0.5 m to 25 m. The option Board in the radio receives the IDs of beacons. The RSSI in the option board is used to define the beacon which is closest to the radio.

TRBOnet INDOOR USER INTERFACE

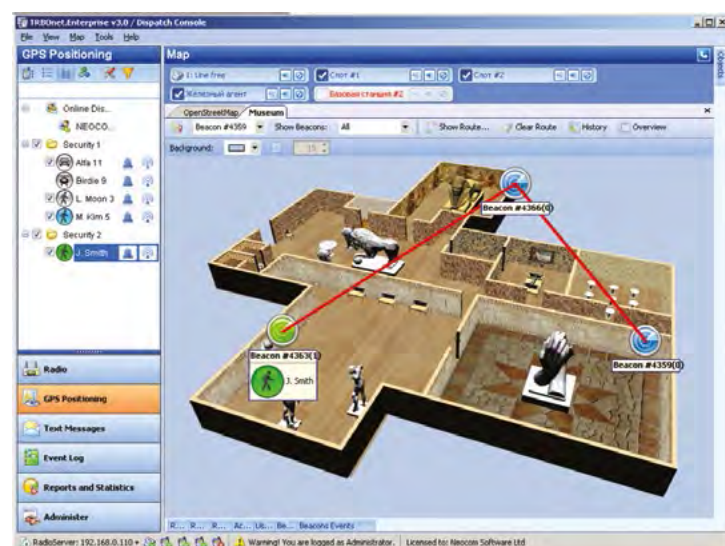

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

MOTOTRBO radio with firmware 1.8 and above.

Computer Hardware / Operating Systems

Windows 7 / Windows 8 / Windows Server.

Interfaces

UDP/IP connection to repeaters or USB cable for Control Radios.

MOTOTRBO System Architecture

Single MOTOTRBO repeaters, IP Site Connect, Capacity Plus, Linked Capacity Plus, Connect Plus.

Other Requirements

PC experienced user.

KEY FEATURES & BENEFITS

- Real time indoor tracking.
- Combined Outdoor and Indoor.
- On Alarm localisation.
- Lone Worker.
- Man Down.
- Text and Telemetry.
- Voice Dispatch and Voice Recording.
- Custom 2D and 3D maps with zoom capability.
- History.
- Reporting.
- Wireless installation.
- RSSI measurements.
- 2-3 year battery for Indoor transmitters, range of up to 25 meters (82 feet).
- Unattended indoor beacon implementation of the IP65 standard.

FIND OUT MORE

WEB: www.trbonet.com/indoor.aspx

FLYER: www.trbonet.com/pdf_files/TRBOnet_Indoor.ppt

ALSO FROM NEOCOM



ZONITH IPS

INDOOR LOCATIONS TO MOTOTRBO RADIOS

ZONITH IPS
WITHOUT
AFFECTING THE
RADIO NETWORK
PERFORMANCE,
ZONITH IPS
DELIVERS REAL-
TIME INDOOR
POSITIONING TO
KEEP TRACK OF
EMPLOYEES FOR
SAFETY PURPOSES
AND OF ASSETS
FOR HEIGHTENED
EFFICIENCY.

MARKETS
Utilities, Natural Resources,
Offshore Oil & Gas, Prisons,
Hospitality, Manufacturing,
Healthcare, Education.



DISTRIBUTION
North America, EMEA,
APAC, CALA.

LANGUAGES
English
(documentation and setup).
User Interface can be in any
Latin language.

The ZONITH Indoor Positioning System (IPS) uses LAN connected beacons to track Bluetooth enabled MOTOTRBO radios within a building. The software application has a graphical user interface to display the real-time location of radio users. Each ZONITH Bluetooth Positioning Beacon creates a detection zone and transfers the location of Bluetooth devices to a central computer over the LAN. The Beacons can be tuned to cover small or wide areas. The system delivers real-time indoor positioning throughout a building, without affecting the radio network performance. Control room staff can move throughout maps and floor plans to locate and track people indoors instead of having to receive position information by voice or other means. Bluetooth enabled radios are only monitored in real time when Bluetooth is turned on. The ZONITH Indoor Positioning System (IPS) has been delivered successfully in prisons, psychiatric hospitals, offshore installations, power plants and other large facilities where size and staff safety makes location an issue.

By combining the ZONITH IPS with ZONITH ACS, people are instantly notified of the exact position of a member of staff when they activate an emergency alarm on a MOTOTRBO radio. The system automatically sends a text message with the exact location information of the member of staff in distress to other radio users or control room staff.

ZONITH IPS

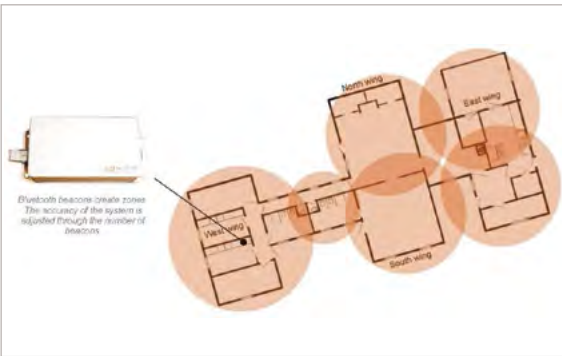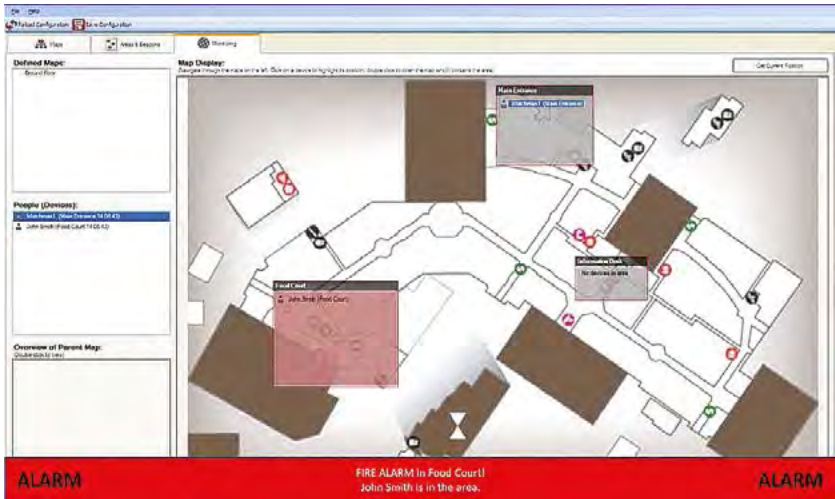

ZONITH IPS INFRASTRUCTURE

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

Bluetooth Side Adapter PMLN5712B for DP3xxx radios.
MOTOTRBO firmware release 2.3 or higher.

Computer Hardware / Operating Systems

PC Dual-core 2GHZ CPU or higher, 4Gb of system RAM,
Windows Server or Windows 7. Supports 100/1000 LAN to
transfer location data of Bluetooth devices.

MOTOTRBO System Architecture

Direct, Conventional Repeater, IP Site Connect,
Capacity Plus.

Other Requirements

Understanding of wireless technologies and IP.

KEY FEATURES & BENEFITS

- Locates people indoors in real-time using Bluetooth.
- Automatically transmits location information to personnel by digital radio.
- Gives a complete general overview of staff resources.
- Clear graphical overview of people's locations within a building, enabling control room staff to immediately see where resources are - especially in emergency situations.
- Interface can be accessed through a standard browser from any computer connected to the LAN.
- Many enhanced lone worker protection features.
- IPS is used to create 'Safe Areas'. If a member of staff leaves a 'Safe Area' IPS will automatically activate Lone Worker services to ensure the person's safety.
- Reporting feature records a person's position, movement and time within a building.

FIND OUT MORE

PRODUCT PAGE: www.zonith.com/products/ips
PRODUCT FLYER: www.zonith.com/downloads

ALSO FROM ZONITH



RADIO INFRASTRUCTURE



RADIO INFRASTRUCTURE

Select from several solutions that provide the opportunity to customise your MOTOTRBO infrastructure to meet specific needs. There are options to extend the reach of your MOTOTRBO communications network and interoperate with other radio systems, telephones and mobile computing devices.

Several reporting and analysis tools are available which our ADP partners have developed to help you optimise the performance of your MOTOTRBO system and enhance the management of your network. These include voice dispatch, voice call recording (with date and time stamps), the ability to control system usage, prioritise calls and identify which users are active. You can also view graphical representations of the network infrastructure for real-time network monitoring, identify the type of data transferred by repeaters, map coverage areas and log hardware failures.



ADEO-INTEROX


ADEO-INTEROX COMMUNICATION STATION PATCHING SOLUTION FOR HETEROGENEOUS NETWORKS

Adeo-Interox Communication Station is a dispatcher platform developed to guarantee total interoperability between MOTOTRBO and all other radio technologies available on the market. Adeo-Interox solution offers dispatching functionalities, GPS based localisation and cross patch functions. The iRadio gateway provides the ability to cross connect DMR radios with TETRA, analogue radio, GSM, PBX (analog and IP), satellite phones, HF radio, and ASTRO.

Adeo-Interox offers two types of interoperability. The first interoperability type is “mediated” by the operator so that the control room can cross patch between MOTOTRBO users and other radio technology users. The second type offers the opportunity for the radio end user to direct patch his terminal with other technology. Directly from the field, the radio user can send a message that will enable group call involving telephone users, or any radio device from other technology (such as TETRA, ASTRO or 3G cell phones).

With this solution, it is possible to create static or dynamic conference call involving several different radio technologies. Adeo-Interox is ideal for any public or private organisations that need flexible interconnections, localisation and coordination of complete operations on a wide scale for emergency, security and control purposes.

ADEO-INTEROX

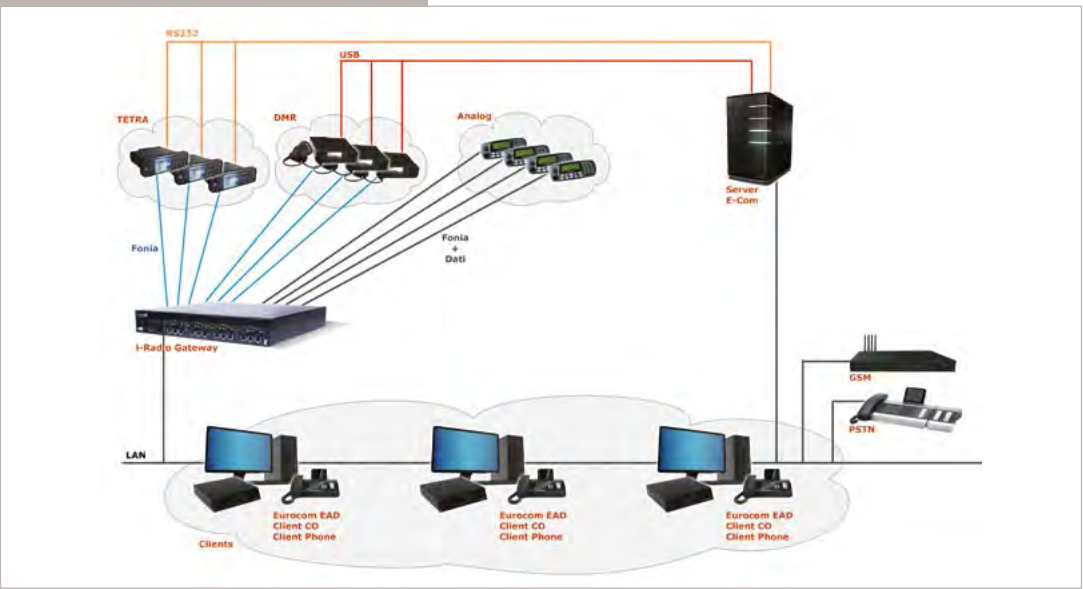

ADEO-INTEROX
ADEO-INTEROX
COMMUNICATION
STATION IS THE
BRIDGE BETWEEN
EXISTING
TECHNOLOGIES
AND MOTOTRBO.
IT ENSURES THE
CAPACITY TO
CROSSPATCH ANY
RADIO TECHNOLOGY
TO DMR - HANDLING
ANY HETEROGENEOUS
NETWORK AS
ONLY ONE VIRTUAL
NETWORK.

MARKETS

Public Administration,
Private organisations.

DISTRIBUTION

EMEA and Latin America.

LANGUAGES

English, Italian, Spanish,
German, French.

Any other language on demand.



SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

DM3600 release 1.4 or higher, compatible since release 01.02.03, RNDIS Motorola Driver, Motorola connection wire PMKN4016A.

Computer Hardware / Operating Systems

Workstation PC with Microsoft OS. IPv4/v6, one sound card device per channel and one port (Serial/USB) per channel. Suggested Pentium 4 or equivalent, 1Gb RAM, 50 Gb HDD.

Interfaces

iRadio Gateway hardware supplied by Eurocom Telecomunicazioni.

MOTOTRBO System Architecture

Conventional, IP Site Connect, Capacity Plus, Linked Capacity Plus and Connect Plus.

Other Requirements

Experience in MOTOTRBO radio programming.
Basic OS and IT administration knowledge required.

KEY FEATURES & BENEFITS

- Interoperability: allows users to activate advanced interoperability functions between heterogeneous PMR networks.
- Worldwide diffusion of PMR communication: the IP protocol is supported by almost all communication service providers. This means that it is easy to obtain the worldwide extension of an IP link. This scenario enables Adeo Interox to extend every PMR communication throughout the world.
- Flexibility in communications: PMR networks can be used by any users on the IP network. With the Adeo Interox communication software or other standard VOIP applications, users can link to any PMR network interfaced by an I-Radio Gateway.
- New services: Adeo Interox provides the possibility for new applications for PMR users like IP multi-conference (video and voice), integrated messaging and presence services.
- Reduced network costs: thanks to the IP convergence, a single technology can be used for all the services (voice, video, data, radio).

Key technical features:

- Client /Server architecture.
- GPS navigation, radio localisation.
- Call recording.
- VOIP based.
- Cross Patch functionality (telephone interconnect).

FIND OUT MORE

WEB: <http://interox.eurocomtel.com>

ALSO FROM EUROCOM TELECOMUNICAZIONI



AUDIO GATEWAY RA-TI-XX
DUE TO THE FULL MANAGEMENT OF THE DMR PROTOCOL, THE AUDIO GATEWAY CAN OPEN ALL COMMUNICATIONS OF THE RADIO NETWORK, INCLUDING PRIVATE – MAKING IT AN IDEAL SOLUTION FOR FULL RECORDING PURPOSE IN MOST EMERGENCY SITUATIONS.

MARKETS

Public Safety (Police, Fire Brigades, Medical Rescue, Civil Protection), Utilities (Oil and Gas, Electricity Production and Distribution), Transportation, Municipal Police, Taxi, Campus.

DISTRIBUTION

Worldwide (please specify your phone line signalling standard).

LANGUAGES

English, Italian, French.

AUDIO GATEWAY RA-TI-XX


FULL DUPLEX AUDIO GATEWAY FOR CONSOLE AND PHONE BRIDGE

Audio Gateway provides a powerful audio interface for Control Room applications in multisite simulcast and non simulcast networks. RA-TI-01 and RA-TI-02 perform an automatic radio to telephone and telephone to radio interface or an RTP/IP interface for the dispatching centre. Phone interfaces can be analogue PSTN/PABX lines or SIP-IP ports.

These modules, connected through an IP port to a base station or to an IP multisite network, provide a true full duplex DMR audio gateway port. They operate in standalone mode (no external PC needed) and are able to manage an automatic phone bridging and/or interfacing an analog console. The RA-TI-XX is connected to one IP only (e.g. Master station IP). In the case of Master failure, the audio gateway connects itself automatically to the “Alias Master” IP which ensures constant communication between a dispatcher, radio and telephone terminals.

Audio Gateway eliminates communication delays and other instabilities that occur with VOX. A conventional console or dispatching system may be easily re-used in a DMR network saving costs and reducing trouble during migration.

AUDIO GATEWAY RA-TI-XX

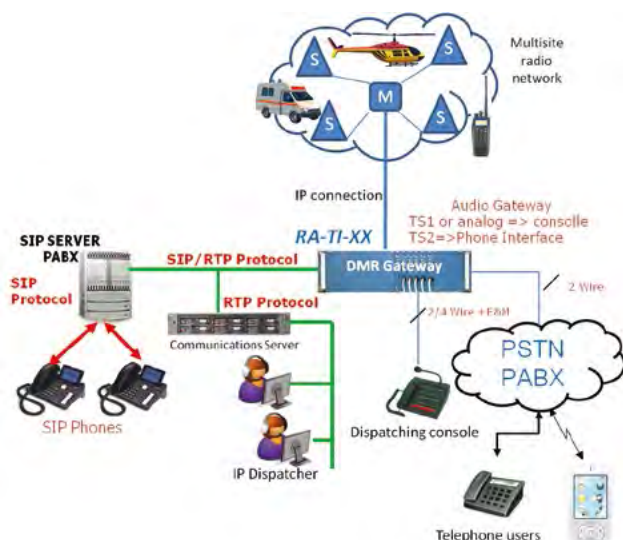

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

MOTOTRBO terminals with 1.v6a or higher SW release; RA-XXX IP base stations as standalone repeater or multisite multicast/simulcast network. Direct interfacing with DR3000 is not yet implemented.

IP Technology

UDP/IP connection between the RA-TI-XX and the base station. RTP/IP connection between the RA-TI-XX and the dispatcher.

IP bandwidth requirement: 70Kb/s in analog up/down or 30Kb/s in DMR (both timeslots).

Interfaces

Ethernet 10BT/100TX for IP; 2wires phone (line user side) or 2/4wire + E&M from external analogue console.

Other Requirements

IP networking basic concepts, MOTOTRBO programming tools.

KEY FEATURES & BENEFITS

There are three main functionalities in Audio Gateway: Phone Bridge, Analogue Console and IP Dispatch.

Phone Bridge Features:

- Full duplex connection eliminates telephone/radio communication delays and other instabilities that may occur with VOX (important for Phone Bridge Applications).
- Direct IP connection with the repeater.
- All DMR calls management (private, group, broadcasting).
- Analog PSTN/PABX or SIP/IP interface.
- Priority “over the air” output and control of the communication flow.
- Text messaging, emails and positioning reports available on dedicated IP ports.

Analogue Console applications:

- Console port accesses the radio network directly (not from a mobile terminal) with priority respect to the mobile terminals.
- Operates in automatic dual mode analogue/DMR according with the incoming call.

IP dispatching applications:

- Operates in RTP-IP streaming (standard mu-law 64kb/s digital audio over IP) to create PC based dispatching system.
- SIP based inter-cell/inter-systems communication extender.

FIND OUT MORE

WEB: www.radioactivity-tlc.it/documenti/ENV3%20-%20DMR%20Telephone%20interface.pdf

ALSO FROM RADIO ACTIVITY



BPG TRBOPLUS LABS2

OPTION BOARD FOR MOTOTRBO NETWORK ADMINISTRATORS

BPG TRBOplus is an option board specifically designed for Motorola radios, portable or mobile, with the aim of extending the standard radio functions. BPG TRBOplus LABS2 is a flexible and useful tool for technical departments or customer network administrators.

With this option board users can measure the RSSI level, monitor all the voice and data traffic on the radio display (over the air logger facility), listen to all the group or private calls on the selected digital channel, and store automatically RSSI measurements with associated GPS position in the internal flash memory.

With 5 tones and FFSK ETS 300-230 signalling, it also adds useful analogue channel based tools.

BPG TRBOPLUS LABS2



SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

DP3601, DM3601, DP4801, DM4601 radios.

Computer Hardware / Operating Systems

Windows 7/8 with installed Motorola USB drivers for programming and downloading RSSI/GPS data.

Interfaces

Motorola USB programming cable.

KEY FEATURES & BENEFITS

- RSSI: measurement in dBm in analogue or digital channel.
- GPS: info on radio display.
- OTA Monitor: allows tracing over the air DMR traffic on the channel.
- Audio monitor: allows listening to all digital calls on the channel (also private calls).
- RSSI datalogger: Without any heavy accessory such as a notebook or instruments, it is possible to map the radio coverage of a specific area and then export data to Google Earth. The measurements are done automatically and stored in an internal flash memory with GPS data. Stored data can be exported in GPX or KMZ for Google Earth.
- 5 tone signaling (encode and decode 5 tone signaling on analogue channels).
- ETS 300-230 FFSK based signaling (encode and decode FFSK signaling).
- On request, the functionality of BPG TRBOplus can be personalised.

FIND OUT MORE

WEB: www.bpg.it/en/index.php?section=trboplus

FLYER: www.bpg.it/en/soluzioni_bpg/trboplus/pdf/TRBOPLUS_LABS2_Logger_eng_rev2_web.pdf

ALSO FROM BPG RADIOCOMUNICAZIONI

MARKETS

Motorola Dealer, Technical Department, Customer Network Administrator.

DISTRIBUTION

Worldwide.

LANGUAGES

English.



**EASY SIMULCAST
RA-080/160/450**
THE SIMULCAST
SOLUTION IS THE
BEST SOLUTION
FOR EMERGENCY
SITUATIONS
PROVIDING A FAST
AND EFFICIENT
“OPEN CHANNEL”
COMMUNICATION
OVER THE ENTIRE
COVERAGE AREA.

MARKETS

Public Safety (Police, Fire Brigades, Medical Rescue, Civil Protection), Utilities (Oil and Gas, Electricity Production and Distribution), Transportation (Railways, Motorways, Urban Bus and Underground), Municipal Police, Taxi, Campus, National Parks, Telemetry and SCADA Applications.

DISTRIBUTION

Worldwide (please specify your phone line signalling standard).

LANGUAGES

English, Italian, French, German.

EASY SIMULCAST RA-080/160/450


FLEXIBLE BASE STATION FAMILY FOR SIMULCAST INFRASTRUCTURE: IP BASED

The RA-XXX base stations are “software defined radio” developed to achieve optimum performance on digital and analogue simulcast networks.

Easy Simulcast algorithms automatically detect and solve the main simulcast problems in the overlap areas, allowing fast and easy network implementation. The base stations have the capability to recover accurate sync (time and frequency), adjust the delays coming from IP and RF propagation and align the DMR protocol history to achieve precise and matched emissions of the bit streaming. The main characteristics are: up to 32 slaves for each master, automatic analogue/DMR functioning and network control layer.

Simulcast is a radio network in which all the repeaters are active simultaneously on the same frequency. It corresponds to a single “big repeater” using the same frequency over the whole coverage area. It is particularly useful in areas with poor connectivity due to a lack of frequencies (e.g. high density areas with buildings). The simulcast network removes the need of scan on mobiles and portables, ensuring real time roaming and hand over during the call, and eliminating call losses and saving on frequencies and their licence costs.

EASY SIMULCAST RA-080/160/450

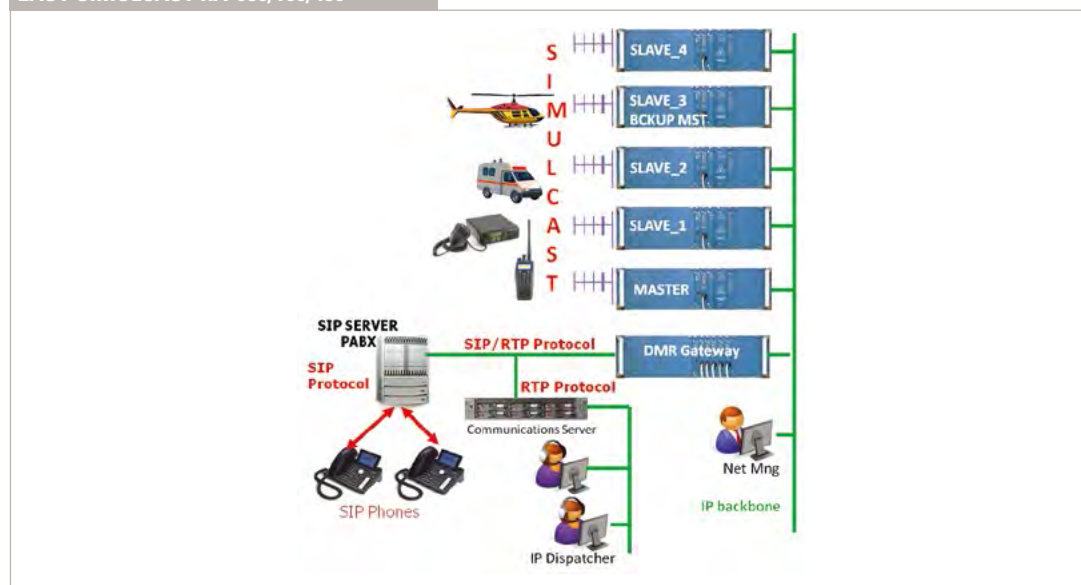

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

MOTOTRBO terminals with 1.v6a or higher SW release; RA-TI-XX as audio gateway (if needed); RA-XXX base stations as multisite IP simulcast network. Currently direct interfacing with DR3000 is not possible.

IP Technology

Protocols: UDP/IP and TCP/IP (ipv4) multicast and unicast according to RFC 4594.

Bandwidth: the IP bandwidth is used in presence of valid signal only; it is required <70Kb/s in analog or 30Kb/s in DMR (both timeslots); the Master requires N x this bandwidth to manage N active Slaves.

Interfaces

Ethernet 10BT/100TX for IP; SMA for external GPS receiver antenna.

Other Requirements

IP networking basic concepts, MOTOTRBO programming tools, familiarity with multisite radio networks.

KEY FEATURES & BENEFITS

- “Plug and play” dual mode analogue/DMR simulcast solution.
- Integrates all simulcast algorithms: dual mode 32 CH Voting system, fully automatic signal calibration and equalisation algorithms, timing and frequency synchronisation.
- Able to operate with the most popular link interfaces like TCP/IP, twisted wires, narrow band radio frequency link and also in mixed environments.
- Radio system automatically reacts to failure situations by seeking a minimum possible disruption.
- An “Alias Master” station, placed away from the main Master, will automatically replace the Master in case of failure.
- Full LINUX “IP native” platform.
- Soft diversity receivers for best performance in fading events.
- Temperature, VSWR and voltage protections with automatic DMR advises.
- IP ports dedicated to audio gateway, txt messages, positioning and telemetry.
- Powerful remote control tools that minimize set-up and maintenance costs.
- Compact structure (1/2 SUBRACK 19” 3HE, width 280 mm) made up by single shielded modular units, internal duplexer included.
- Up to 25W RF power in 68-88 MHz (RA-080), 146-174MHz (RA-160) and 410-470MHz (RA-450) bands.

FIND OUT MORE

WEB: www.radioactivity-tlc.it/documenti/ENB18-Simulcast%20overview.pdf

CASE STUDIES: www.radioactivity-tlc.com/case-history.php

ALSO FROM RADIO ACTIVITY



FS-3000
FS-3000 IS AN EXTREMELY SIMPLE SOLUTION FOR DATA TRANSFER OVER RS-232. A TYPICAL APPLICATION HAS PROVED TO BE THE ABILITY TO CONNECT OLDER RTUS TO NEWER MOTOTRBO RADIOS TO FACILITATE MIGRATION TO DIGITAL AND PROTECT INVESTMENT.

MARKETS
Utilities, Oil and Gas Pipelines, Water Supply, Industrial Automation, Telemetry and SCADA Applications.

DISTRIBUTION
EMEA.

LANGUAGES
Russian, English.

FS-3000

OPTION BOARD FOR DATA TRANSFER


FS-3000 is an option board developed for use with any MOTOTRBO R1.X radios to provide an interface with different data devices via a RS-232 interface. As an option board the FS-3000 was designed in accordance with Motorola requirements for MOTOTRBO R1.X OB.

The FS-3000 option board comes in two models: FS-3000M for MOTOTRBO mobile radios and FS-3000P for MOTOTRBO portable radios.

FS-3000 is installed inside the radio and uses the internal bus of the radio. The data-cable for the portable radio is connected directly to the accessory connector, while for the mobile radio the data-cable is connected to the mini-jack on the option board.

The MOTOTRBO radio equipped with the FS-3000 Option board can be used by various kinds of telemetry controllers in Utilities, Oil & Gas and Water supply, Energy/power supply and Industrial Automation. A typical application is the ability to connect older RTUs to newer MOTOTRBO radios to facilitate migration to digital and protecting investment.

FS-3000 INFRASTRUCTURE

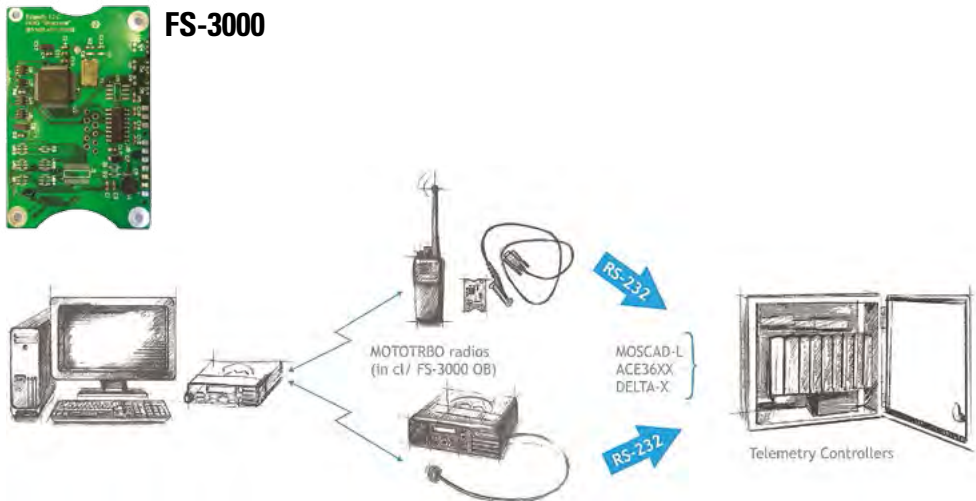

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

Compatible with all MOTOTRBO R1.X radios.

Computer Hardware / Operating Systems

PC or data device with the serial port.

Interfaces

Data-cables for mobile or portable MOTOTRBO radios (delivered with the appropriate model of Option board).

“End” connectors can be either RG-45 or DB-9 in accordance with the customer’s requirements.

MOTOTRBO System Architecture

Direct Mode, Repeater Mode.

Other Requirements

Very good knowledge of MOTOTRBO CPS and RS-232 configurations. The distributor must be equipped with the tools to install an Option board and after installation, to restore the waterproofing of the radio.

KEY FEATURES & BENEFITS

- Allows data rates of up to 2.4 Kbps Over-the-Air.
- Has its own data buffering and error correction.
- Can be easily programmed locally or remotely ‘over-the-air’.
- Can be used with many other controllers with a RS-232 interface.
- ARM7 microprocessor architecture.
- MAX3232 line driver.
- Hardware handshaking (RTS, CTS).
- Max Tx PDU size is 1500 bytes.
- Own buffering of 16 packets and error correction.
- Windows based FS-3000 configuration software.
- Local and remote “over-the-air” programming (from one to another).
- Adjustable interface parameters such as bit rate and data bits and radio initialisation (ID, CAI Network).
- Upgrade is easy and available after new OP firmware is released.
- Approved on MOSCAD, ACE36XX and Delta-X controllers.

FIND OUT MORE

WEB: www.friendly.by/Product_Catalogue/Own_development/Board_FS-3000



GW3-TRBO®


ENHANCED PERFORMANCE MANAGEMENT FOR MOTOTRBO NETWORKS

GW3-TRBO® is a system management tool to monitor, manage, archive, report and create notifications on MOTOTRBO™ systems. GW3-TRBO provides a quick and easy way to capture system activity and performance. The software offers enhanced functionality to Motorola's Repeater Diagnostics Alarms and Control (RDAC) software by presenting the system administrator with live performance and usage information for each radio and talkgroup and alarm notifications.

GW3-TRBO users can instantly view who is using airtime, real-time talkgroup activity, and data from the MOTOTRBO repeaters. This allows for quick, visual confirmation that the network is performing as expected.


RDAC (Repeater Diagnostics and Controls) application allows a system administrator to monitor and control repeaters within the system (analogue or digital). While this repeater monitoring and control component is critical to the system, GW3-TRBO provides additional functionality by presenting the system administrator with live performance and usage information on the system.

GW3-TRBO®

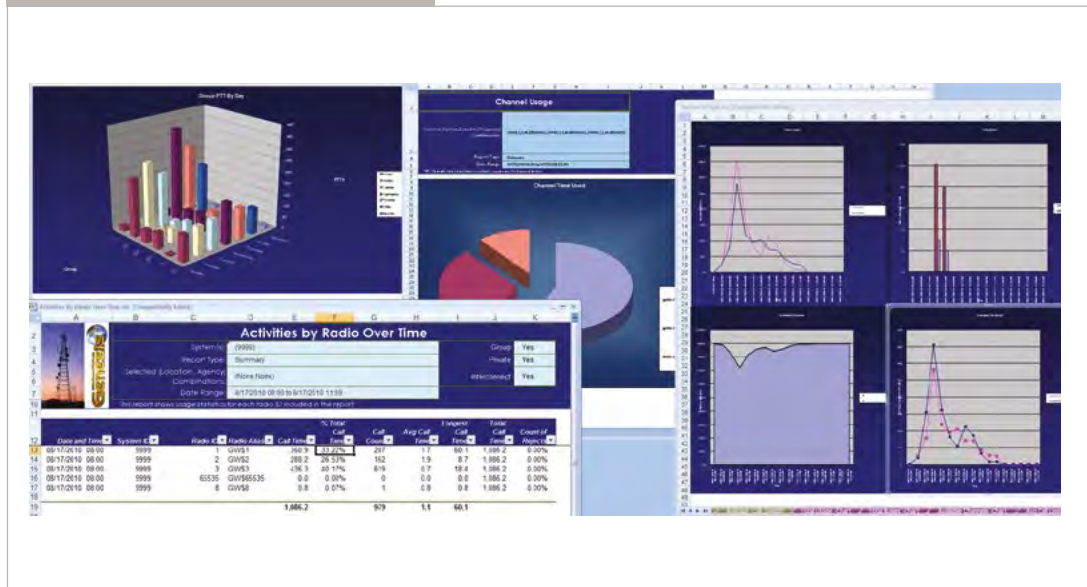

GW3-TRBO®
ONE INTEGRATED
SOLUTION ALLOWS
CENTRALISED
MANAGEMENT
OF ALL SYSTEM
WIDE DATA TO
DISPLAY REAL-
TIME ACTIVITY,
SEND CRITICAL
NOTIFICATIONS,
AND ARCHIVE DATA
FOR FORENSIC
REPORTING ON
ALL MOTOTRBO
PLATFORMS.

MARKETS
Airlines, Construction, Education,
Entertainment Venues,
Government, Hospitality,
Manufacturing, Mining, System
Operators, Transportation, and
Utilities.
DISTRIBUTION
EMEA.
LANGUAGES
English.

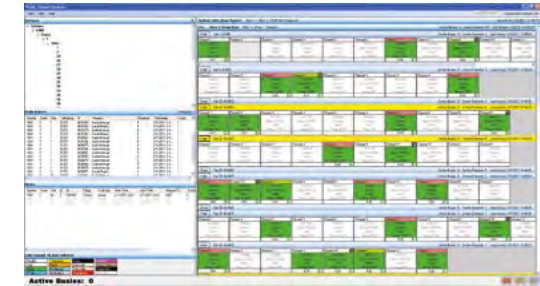

GW3-TRBO® USER INTERFACE

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

MOTOTRBO firmware 1.6A or newer; XRT9000 Gateway must be purchased for connection to Connect Plus.

Computer Hardware / Operating Systems

- Compatible with up to 6 sites. Desktop Specs: Desktop, i7 (quad core, 8mb cache, 3.40GHz), 8Gb RAM, 500Gb SATA HDD, DVDRW, Win 7 Pro, Office Basic, 20"+ monitor, keyboard, mouse, speakers, 3yr NBD Onsite Service.
- Required for 7 or more sites and/or increased database capacity.

Server Specs: Dell PowerEdge R320 Rackmount Server, Xeon (6 core, 15M Cache, 1.90GHz), 8Gb RAM, RAID Controller, 2x300Gb 15k Drives, DVD-RW, Windows Server 2008 R2 x64, SQL Server 2008R2 Standard (or above), Office Basic, ReadyRails (2/4 Post).

Interfaces

IP Connectivity to Master Repeater for GW3-TRBO to connect as a peer.

MOTOTRBO System Architecture

MOTOTRBO Capacity Plus, IP Site Connect, Connect Plus, Conventional and Linked Capacity Plus Systems.

KEY FEATURES & BENEFITS

- Centrally monitor multiple MOTOTRBO systems with one easy to use program.
- Establish parameters for automatic system alerts and notifications.
- Archive network activity for up to six months to enable historical and forensic reporting.
- Remote IP monitoring to diagnose system issues from one central location, minimising system downtime and maintenance costs.
- Report on system and subscriber, usage and performance with customisable Excel® reports, importable to most billing programs.
- Subscriber Access Control (SAC) provides system administrators control of network usage to maintain a secure system.

GW3-TRBO Core Software Modules include:

Alias Manager, Security Manager, Site and Systems Input Manager, Trigger Notifications.

GW3-TRBO Live Views include:

- Activity by Talkgroup with Emergencies.
- Affiliation Display (Connect Plus only).
- All Activity Screen.
- Channel Screen.
- System Activity Summary.
- SysVista Dashboard.
- Subscriber Access Monitor.

GW3-TRBO 15+ Reports include:

- Usage by Infrastructure.
- Detailed usage by subscriber, groups agencies.
- Diagnostics by site, channel, slot.

FIND OUT MORE

WEB: www.genesisworld.com/EMEA/TRBO/
FLYER: www.genesisworld.com/PDF/GW3TRBO.pdf
MODULES: www.genesisworld.com/EMEA/TRBO/modules.asp



HERNING D.H.R.

TELEPHONE INTERFACE TELEPHONE GATEWAY, PHONE PATCH

As an automated management of the radio network, Herning D.H.R. Telephone Interface provides a gateway between the telephone network through analogue private and public land lines, GSM modem or Inmarsat satellite systems and a two way radio analogue or digital network, computer systems via port RS 232 (for computer, printer and modem) and external audio equipment via a microphone input and speaker output (for intercom, desktop and speech synthesis).

The installation of the Herning D.H.R. Telephone Interface is easy, and full support is provided by a hotline service.

A typical application for the Henning D.H.R. Telephone Interface is security. With the DHR Telephone Interface, a security guard can at the same time manage incoming phone calls, technical alarms and control access. The interface functionalities then integrate to give a safe radio link test, alarm management (up to 42 alarms), lone worker safety and guard tour features.

HERNING D.H.R. INFRASTRUCTURE



HERNING D.H.R.
DATAHERTZ HAVE
DEVELOPED A SET
OF AFFORDABLE
APPLICATIONS FOR
ALL RADIO USERS
TO EXTEND THEIR
MOTOTRBO USE.

MARKETS
Security Services, Municipalities,
Industrial and Commercial Sites,
Transport Services, Taxis,
Building Sites.
DISTRIBUTION
EMEA.
LANGUAGES
French, English.



HERNING D.H.R.

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility
MOTOTRBO R1.08.00.

IP Technology
Repeater with the phone patch license DR3000 or MTR3000.

Interfaces
One telephone interface on one repeater.

MOTOTRBO System Architecture
Conventional system, IP Site Connect and Capacity Plus.

KEY FEATURES & BENEFITS

- Standard 5-tone signaling: EEA, ZVEI 1 & 2, CCIR; special signaling on demand.
- DTMF coding and decoding of telephone and radio voice.
- Programming settings can be modified remotely by DTMF.
- Energy use: 12V, 200mA.
- Easily adapted to system requirements.
- Customisable voice messages to help with use and transmission of alarms.
- Small dimensions: 265x265x75 mm or in rack 19" 2U, weight: 2kg.
- French approval No 98500Z ed A.

FIND OUT MORE

WEB: www.herning.fr/sommaire/index.htm
BROCHURE: www.datahertz.fr/data/downloads/PLVDHRHERNING2011.pdf

ALSO FROM DATAHERTZ



K-TERM82

IO-BOX FOR DMR RADIOS

The IO box K-TERM82 is used for data collection as well as for steering external equipment. The unit integrates various serial communication hardware, analogue and digital inputs and digital outputs with up to 12A current sourcing.

The K-TERM82 is attached to the DMR radio via a USB cable. It can be programmed to set output lines on receiving K-TERM data or text messages. Changes on input lines (analogue and digital) can be used to send K-TERM data or text messages.

The K-TERM serial protocol allows transferring information to attached units via RS232 or RS485. Optionally, the unit can be equipped with additional communication hardware (LAN, CAN).

K-TERM82



SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

All radios DP/DM3xxx and DP/DM4xxx.

Computer Hardware / Operating Systems

Windows 2000 / XP / VISTA / WIN 7 for K-TERM CPS.

Interfaces

K-TERM programming CPS for configuring K-TERM82.

KEY FEATURES & BENEFITS

- 16 Output lines.
- 16 Input lines digital.
- 8 Input lines analogue.
- USB connection to DMR radio.
- Optional 1 to 4 high current output module with 4x12A per Output.
- RS232, RS485, CAN, LAN.

MARKETS

All Vertical Markets.

DISTRIBUTION

Worldwide.

LANGUAGES

English, French, German.

FIND OUT MORE

WEB: www.kilchherr.com

FLYER: www.kilchherr.com/page.php?id=sfhd9

ALSO FROM KILCHHERR ELEKTRONIK




PHONE@TRBO™

TELEPHONE INTERCONNECT

phone@trbo™ allows radios to connect to public or corporate office phone systems. It is possible to pre-program a button for emergency calls, transfer calls to security guard's radios while away from their desk and use the company's phone system to dial a specific radio or talkgroup. Emergency calls are sent to the AllCall talkgroup. There is also Man Down emergency support for unmonitored lone workers.

Voice prompts make it friendlier to use for telephone callers. phone@trbo™ offers the features of a traditional analogue phone patch while adding the benefits of both digital telephony and MOTOTRBO radios. For instance, text messaging is used for signaling, not only to make a call, but also to notify the caller-ID of an incoming call. In case the call is missed, it is easy to call back by simply replying to the caller-ID text message. Similarly, call filtering notifies phone callers that a radio is offline or they mis-dialed the group, thus freeing up airtime and the phone line.

Best of all, phone@trbo™ does not burden subscriber radios with an additional repeater entitlement ID or option board, nor does it require phone callers to know what slot to call into. It can even be expanded to support email and other features.

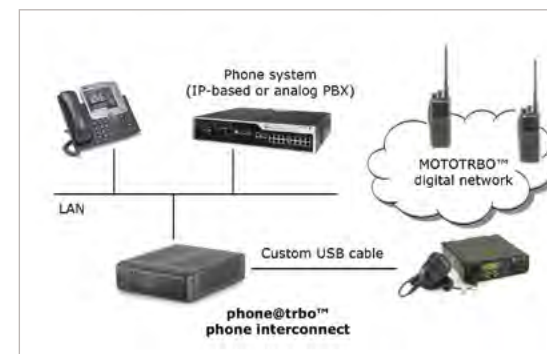

PHONE@TRBO™ INFRASTRUCTURE

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

Any Motorola MOTOTRBO radio with firmware 1.08.32 and up.

IP Technology

IETF-SIP based PBX or analog (using Cisco SPA3102 adapter) phone system, Ethernet for deployment and monitoring. (PC and audio/data cable is included).

Interfaces

Ethernet for network access to the PBX or FXO gateway.

MOTOTRBO System Architecture

Simple, Conventional repeater, IP site connect, Capacity Plus, LCP.

Other Requirements

Besides MOTOTRBO CPS programming, networking, PC and telephone installation skills.

KEY FEATURES & BENEFITS

- Private, group and AllCall calls to radios.
- Multiple incoming phone call routing options: direct patch, voice menus and auto-routing.
- Dial from radio with hot-keypad or text (use contacts as address book).
- Text messaging-based dial, hangup and incoming call with caller-ID.
- Return calls by replying to caller-ID messages.
- Audio and text notifications to radios.
- Emergency (Man Down) automatic dial with pre-recorded voice message.
- Phone call recording to stereo WAV file (L=phone, R=radio).
- IETF SIP complaint telephony signaling.
- Supports analogue lines via FXO adapter.
- Program radios with 1-button dial.
- Half-duplex or 3/4-duplex (using TX interrupt).
- Signal processing to reduce noise and adjust audio levels.
- Easily add email, SCADA, dispatch, logging, and other services.

FIND OUT MORE

DATA SHEET: www.tabletmedia.com/italkiePI.pdf

MANUAL: www.tabletmedia.com/wt/phone@trboGuide.pdf

ALSO FROM TABLETMEDIA

MARKETS

Hospitality Industry, Utilities, Public Transit, Municipality Operations, Retail Delivery Operations, Tow Truck Operators, Health Services, Security, Transportation, Agriculture, Communications, Construction, Education, Government, Manufacturing, Real Estate, Distribution.

DISTRIBUTION


Worldwide.

LANGUAGES

English.

Other languages available upon request at no extra cost.

PHONE@TRBO™

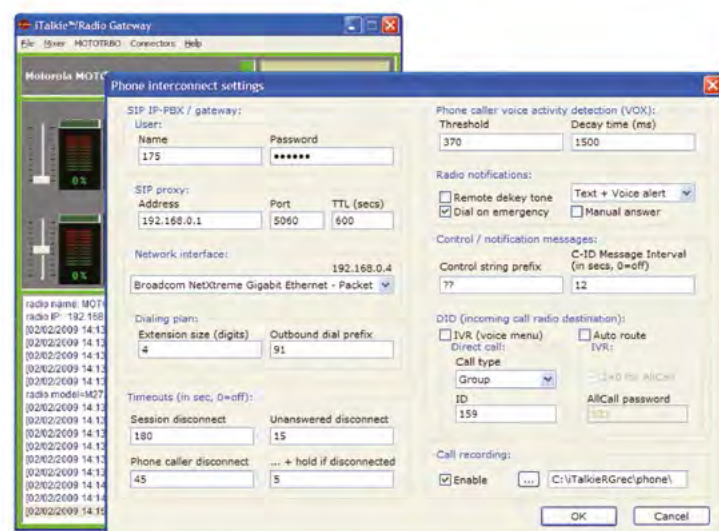



RADIUS-IP

DIGITAL RADIO DISPATCH SYSTEM

Radius-IP Digital Radio Dispatch System is a SmartPTT-based turnkey solution designed for complete control of the radio networks. Using MOTOTRBO hardware and SmartPTT software applications, Radius-IP integrates all necessary components for building an effective dispatch system and ensuring efficient communications among employees.

Main user applications include: multi-site dispatcher control systems for oil & gas pipelines, power grids, highways or railways, dispatching systems for emergency services, municipalities, public transportation, security services, or a single-site dispatcher control system for airports, factories, supermarkets, hotels, etc.


Radius-IP consists of 3 subsystems: a Radio Subsystem (radio base infrastructure), a Dispatcher Subsystem (SmartPTT Software and corresponding computers for server and dispatcher consoles plus accessories) and a Transport Subsystem including equipment for IP communication between all parts of the system (repeaters, servers and dispatcher consoles).

RADIUS-IP



RADIUS-IP
RADIUS-IP
HAS BEEN
SUCCESSFULLY
TESTED AND IS
INCLUDED IN THE
"REGISTER OF
RECOMMENDED
EQUIPMENT"
OF THE GLOBAL
ENERGY COMPANY
– GAZPROM.

MARKETS
Power, Oil & Gas, Manufacturing,
Mining, Public Transportation,
Public Safety, Emergency
Services, Utilities, Hospitality,
Education.
DISTRIBUTION
Worldwide.
LANGUAGES
Arabic, English, French,
German, Italian, Korean, Polish,
Portuguese, Russian, Slovak,
Spanish.

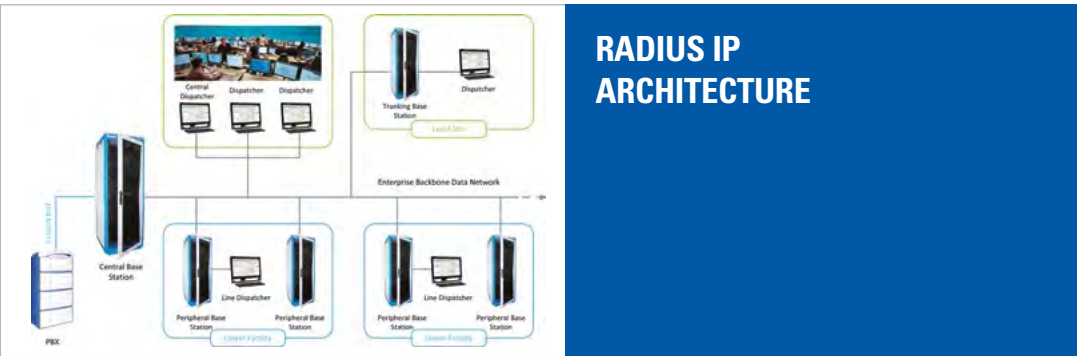

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

MOTOTRBO radio with firmware 1.08.32 or higher,
DM4600/4601 with firmware version R02.00.00 or higher,
DP/DM4000 and SL series with firmware version R02.00.00.

Computer Hardware / Operating Systems

PC, Windows XP/2003/Vista/Windows 7, Pentium,
2 Gb RAM.

Interfaces

Ethernet, (optionally G.703).

MOTOTRBO System Architecture

IP Site Connect, Capacity Plus, Linked Capacity Plus,
Connect Plus, Standalone repeater.

Other Requirements

PC experienced user, Basic IP-network knowledge.

RADIUS IP ARCHITECTURE

KEY FEATURES & BENEFITS

- Expandable multi-level dispatch system.
- Scalability: unlimited number of dispatcher workstations and radios of supervised fleet, remote control via IP-based networks.
- Routing for Voice Calls and Data Transmission among several Base stations and among different radio networks.
- Remote re-programming of BS repeaters.
- Tools providing network settings for different modes of operation.
- IP-based channel infrastructure provides a high level of service availability, flexibility and ease of deployment, maintenance and expansion of the system.
- DMR technology.
- Enhanced functionality provided by SmartPTT software.
- Industry specific adaptability. Functions specific to a particular industry can be implemented in SmartPTT software.
- Real-time system monitoring, in-depth analysis and control over connected MOTOTRBO infrastructure.

Technical Features include:

- Radio Network Bridging.
- Direct IP Connection to Repeaters.
- Simulcast Support.
- Infrastructure Monitoring.
- Radio Dispatch.
- GPS Tracking.
- Web Client.
- Event and Voice Logging.
- Text and Data Transfer.
- Telephone Interconnect.
- Job Ticketing.
- Telemetry.

FIND OUT MORE

WEB: www.smartptt.com

ALSO FROM ELCOMPLUS





SmartPTT MONITORING

REAL-TIME REMOTE MONITORING AND CONTROL OF MOTOTRBO INFRASTRUCTURE

SmartPTT Monitoring is a software application providing real-time and comprehensive analytics on the radio network for in-depth analysis and optimal management of MOTOTRBO infrastructure.


The system administrator can check the performance of the dispatcher system and control the hardware remotely from a simple graphical user interface.

**SmartPTT
MONITORING**
PROVIDING REAL-
TIME AND COMPLETE
INFORMATION
ABOUT THE
RADIO NETWORK,
SMARTPTT
MONITORING
ALLOWS IN-
DEPTH ANALYSIS
OF SYSTEM
PERFORMANCE,
FOR AN OPTIMAL
MANAGEMENT OF
YOUR MOTOTRBO
INFRASTRUCTURE.

MARKETS
Power, Oil & Gas, Manufacturing,
Mining, Public Transportation,
Public Safety, Emergency
Services, Utilities.

DISTRIBUTION
Worldwide.

LANGUAGES
Arabic, English, French,
German, Italian, Korean, Polish,
Portuguese, Russian, Slovak,
Spanish.

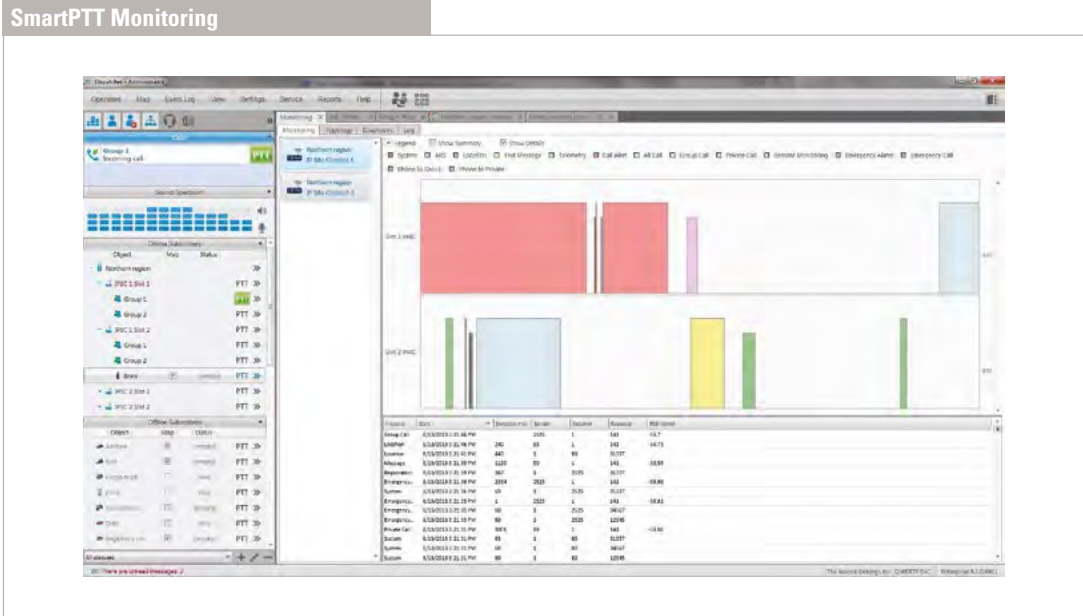

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility
MOTOTRBO radio with firmware 1.08.32 or higher,
DM4600/4601 with firmware version R02.00.00 or higher,
DP/DM4000 and SL series with firmware
version R02.00.00.

Computer Hardware / Operating Systems
PC, Windows XP/Server 2008/Vista/Windows 7, Intel Core
i3 or higher, no less than 2 Gb RAM, HDD recommended
min 12Gb (depends on volume of voice records).

Interfaces
Ethernet.

MOTOTRBO System Architecture
IP Site Connect, Capacity Plus, Linked Capacity Plus,
Connect Plus, Standalone repeater.

Other Requirements
Monitor with resolution 1024x768 or higher (for Dispatcher).

KEY FEATURES & BENEFITS

- Real Time Monitoring – graphical representation of voice and data activity received from MOTOTRBO repeaters allows watching over the system in real time.
- Network Topology – graphical representation of radio network schema: radio servers, repeaters, routers, UPSs.
- Hardware Diagnostics – information about current state of connected MOTOTRBO repeaters and radioservers.
- Hardware Control – tools to shut down or restart radioservers and MOTOTRBO repeaters.
- Hardware malfunction alarms.
- Monitoring Analytics – graphical presentation of the collected data: proportions of event duration during a chosen time frame and daily, proportions of voice and data activity per day during a chosen time period.
- Monitoring Reports – detailed report based on collected data and filtered by a number of criteria.
- Minimised expenses for system maintenance.
- Real-time network infrastructure monitoring.

FIND OUT MORE

WEB: www.smartptt.com
FLYER: www.smartptt.com/files/documents_eng/SmartPTT_Monitoring_flyer_Eng.pdf
VIDEO: www.youtube.com/smartptt

ALSO FROM ELCOMPLUS






TELDIO RBX +PLUS

RADIO BRANCH EXCHANGE:
ADVANCED TELEPHONE INTERCONNECT

RBX +PLUS
RBX +PLUS IS
AN ADVANCED
TELEPHONE
INTERCONNECT
SPECIFICALLY
DESIGNED TO
ALLOW RADIO
USERS TO MAKE
AND RECEIVE PHONE
CALLS DIRECTLY ON
THEIR MOTOTRBO
RADIOS.

MARKETS
Utilities, Natural Resources,
Hospitality, Manufacturing,
Healthcare, and Education.
DISTRIBUTION
North America, EMEA,
APAC, CALA.
LANGUAGES
English.

RBX +Plus (Radio Branch Exchange) is an advanced telephone interconnect specifically designed to allow radio users to make and receive phone calls directly on their MOTOTRBO radios. RBX +Plus brings all the benefits and functionalities of corporate unified communications to digital radios, enabling industries to operate under one private business critical mobile telephony network. This product allows digital radios to communicate with phones with access to familiar telephony features, such as call history, phonebook, and caller ID. It gives customers the ability to truly control their mobile communications coverage area while reducing mobile communications costs without sacrificing functionality. RBX +Plus streamlines communication between phone and radio users with private calls, talkgroups and callgroups. The app was designed to easily scale, and can connect digital two-way radios to something as simple as a standard POTS phone line or as complex as a corporate phone system (PBXs). This application provides organisations with a compelling alternative to cellular and WiFi solutions for their mobile work force. While staying connected in any location is paramount, Teldio delivers the same cellular functionality directly to the mobile worker's radio, leveraging existing radio and telephony infrastructure in a whole new way.

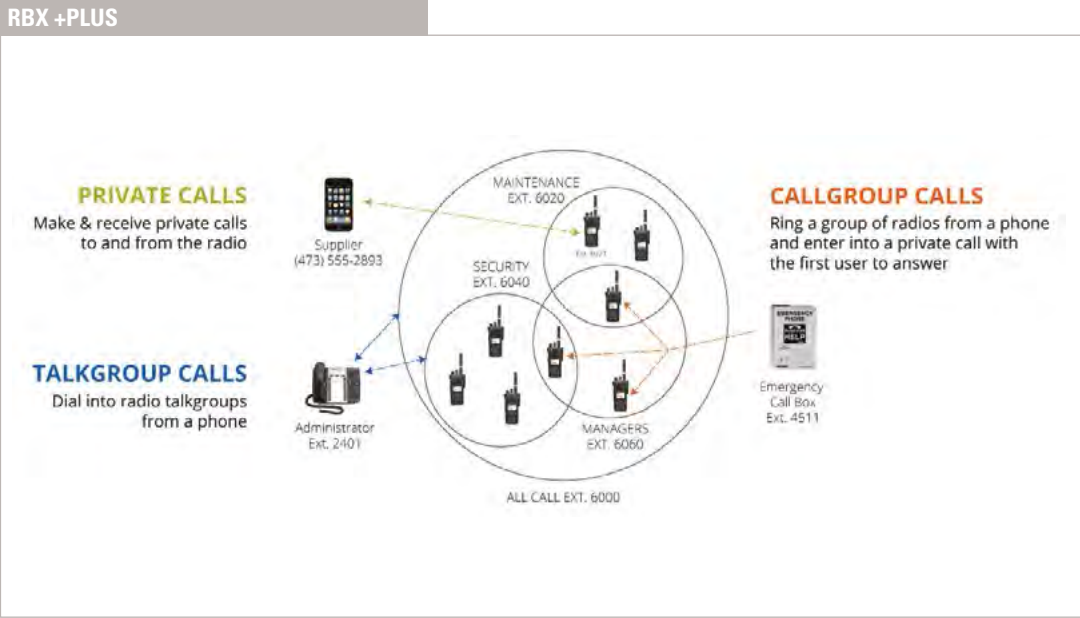

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

1 DM3600 series mobile radio per simultaneous phone call,
1 Motorola Expansion Card per subscriber, Motorola radio
firmware version 1.08.32 or greater, 1 digital timeslot per
simultaneous phone call.

Computer Hardware / Operating Systems

PC Dual-core 2GHZ CPU or higher, 4Gb of system RAM,
Windows XP Professional 32 or 64 bit or Windows 7
Professional 32 or 64 bit, 10/100/1000 Ethernet LAN,
PCI/PCI-E slots for Sound Cards per simultaneous phone call.

Interfaces

IP PBX SIP Trunking, Analog T1 Trunking, PSTN, Internet
Telephony Service Provider (ITSP), GSM/3G.

MOTOTRBO System Architecture

Simplex, Conventional, IP Site Connect, Capacity Plus,
Linked Capacity Plus.

KEY FEATURES & BENEFITS

- Integrated phonebook.
- Call history.
- Missed call notification.
- Caller ID display.
- Speed dialing.
- Call transferring.
- Do not disturb mode.
- Auto answer mode.
- Call recording and logging.
- User provisioning.
- Password protection for channels and users.
- Multi-site roaming.

FIND OUT MORE

WEB: www.teldio.com/products/rbx
BROCHURE: http://media.teldio.com/collateral/product_collateral/Teldio-RBX%2BPlus-Brochure.pdf

ALSO FROM TELDIO





TRBOnet WATCH


MONITORING AND DIAGNOSTIC FOR DIGITAL RADIO SYSTEMS

TRBOnet Watch is a client-server Windows application that monitors all traffic on MOTOTRBO IP Site Connect, Capacity Plus, Linked Capacity Plus and Connect Plus systems - or a single repeater in IPSC mode.

It displays transmitted GPS, ARS, Voice, Text Messages, System and User data with RSSI, source and destination radio ID's and Peer ID's. TRBOnet Watch helps to balance channel loading, as well as define and solve problems in a radio network.

TRBOnet Watch provides users with a system overview in live display, instant system notification, monitoring of channel loading, view of voice and data usage.

TRBOnet WATCH USER INTERFACE

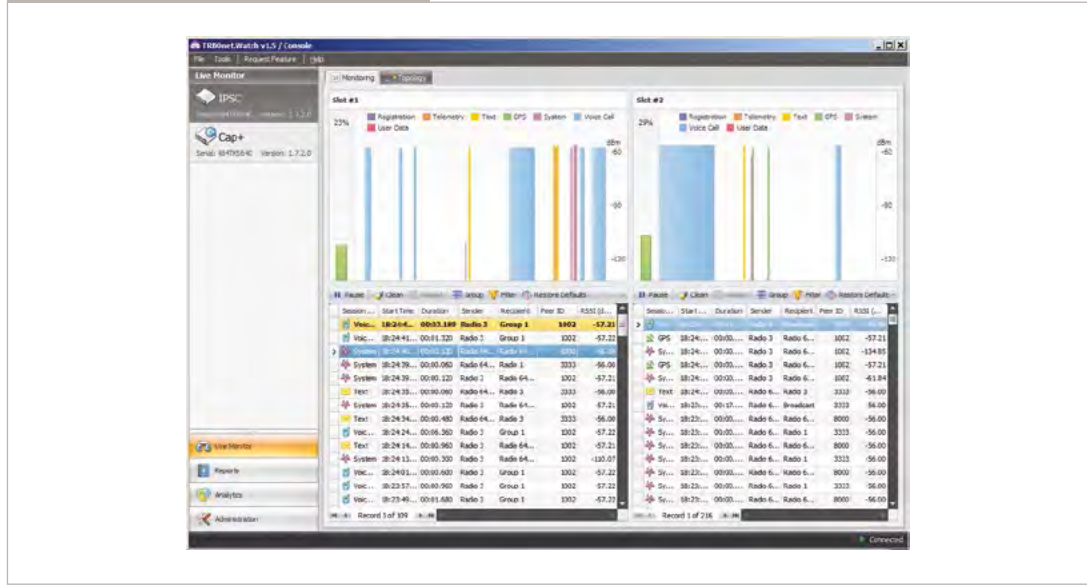

SYSTEM REQUIREMENTS

- Radio Hardware / Releases Compatibility**
MOTOTRBO Firmware 1.6.3 or higher.
- Computer Hardware / Operating Systems**
Windows XP / Windows 7 / Windows Server.
- Interfaces**
UPD/IP connect to repeaters.
- MOTOTRBO System Architecture**
IP Site Connect, Capacity Plus, Linked Capacity Plus and Connect Plus or a single repeater in IPSC mode.
- Other Requirements**
MS SQL Server 2008 R2 Express Edition or Higher.

KEY FEATURES & BENEFITS

- Monitoring and audit of digital channels.
- IP Site Connect / Capacity Plus system topology.
- RF quality control on a Map.
- Analytics module.
- Reporting.
- Online repeater alarm control.
- Email notification.
- Basic / enhanced privacy support.
- Billing.

FIND OUT MORE

WEB: www.trbonet.com/productview.aspx?id=190
FLYER: www.trbonet.com/pdf_files/TRBOnet_Watch_DataSheet_v1.pdf

ALSO FROM NEOCOM

MARKETS
Motorola Service Shops,
Radio Communications
Networks, MOTOTRBO
System Owners.

DISTRIBUTION
EMEA, North America,
Latin America, APAC.

LANGUAGES
English, Russian,
French, Portuguese.



DATA TRANSMISSION & TELEMETRY



DATA TRANSMISSION & TELEMETRY

There are a number of MOTOTRBO applications that enable data transmission for a variety of purposes. MOTOTRBO is particularly well suited as a cost-effective alternative in environments where common data transmission systems such as fibre optic, WiFi or GSM are not suitable or are too expensive to establish.

Monitor and control operational processes remotely with an array of telemetry applications. These include water supply, electricity distribution, oil and gas pipelines as well as siren warning systems. For example, data regarding water quality, flow, pressure and electricity supply can be transmitted from remote sites to MOTOTRBO subscribers.



COP921


TELEMETRY & COMMUNICATION UNIT

The COP921 is a telemetry and communication unit which allows up to 8 radio users to automatically receive a text message. COP921 supports two types of text messages: TMS (Text Messaging System) which can be received by each MOTOTRBO device, and CallOut text messages which can be received by MOTOTRBO radio devices with a built-in Option Board DMR910.

The CallOut text message is displayed on the radio device until a key is pressed by the operator. Simultaneously, different tones with variable volume level may be generated via the loudspeaker. The way of representing the CallOut text message is not programmed in the radio device but is encrypted in the CallOut text message (the way the message is represented is defined within the COP921).. It is also possible to delete the CallOut text message from the radio device via the air interface, which is of value when, for example, a fault has been rectified before the radio subscriber has pressed a key. For instance, when a group of radio subscribers is alerted and one of the subscribers accepts the service order, the CallOut text message can be deleted from all other radio devices.

This application integrates MOTOTRBO and the applications COP921 and DMR910/DMR915.

COP921

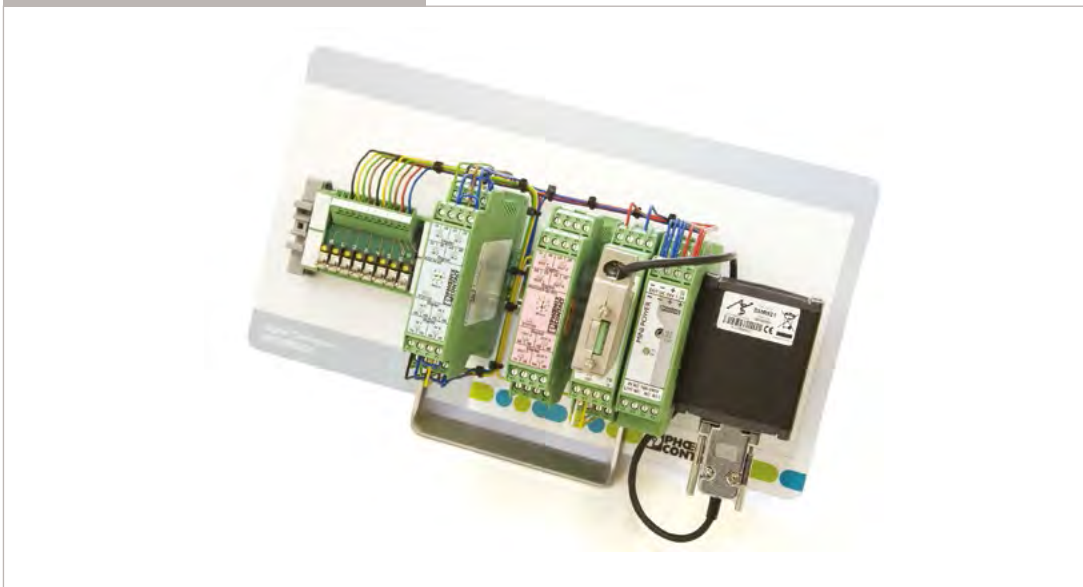

COP921

COP921'S ABILITY TO SEND CALLOUT TEXT MESSAGES IN ADDITION TO TMS MESSAGES IS IDEAL FOR SENDING ALERTS TO A GROUP OF UP TO 8 SUBSCRIBERS.

MARKETS

Police, Ambulance, Fire Brigade, Security, Oil & Gas, Power Companies.

DISTRIBUTION

Worldwide.

LANGUAGES

English, German.



SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

MOTOTRBO DM4000 series radios.

Computer Hardware / Operating Systems

PC with USB-Port, MS Windows XP.

Net Framework 3.5 Service Pack 1 or higher.

COP9210 programming software.

Interfaces

USB interface to connect DMR radio device (DM4xxx).

RS485 to expansion Phoenix Contact Module.

Motorola programming cable (HKN 6184A or PMKN 4010A for mobile.

Radios, PMKN 4012A for portable radios.

MOTOTRBO System Architecture

Single Site, IP Site Connect. Capacity Plus,

Linked Capacity Plus.

Other Requirements

Max. 8 Phoenix Input modules are connectable.

An option board (DMR910 or DMR915) developed by ATS Elektronik GmbH.

KEY FEATURES & BENEFITS

- USB interface to a MOTOTRBO DM4000 radio device.
- RS485 interface to Phoenix input modules (optional).
- Operating voltage from the radio device.
- Max. 8 Phoenix input modules can be connected.
- 64 digital inputs (+4 inputs at COP921).
- 4 outputs for status indication (operating status, CallOut active).
- Programmable CallOut Clear Command.
- TMS and CallOut text messages can also be sent both mixed.

FIND OUT MORE

FLYER: www.atsonline.de/de/downloads/produktinfoblaetter.html

ALSO FROM ATS ELEKTRONIK



DMP921

USB SERIAL CONVERTER FOR MOTOTRBO



The DMP921 interface converts the USB interface of MOTOTRBO radios to a Phoenix compatible interface. This enables users to operate Phoenix telemetry applications via a DMR network. Measured values can just as well be transmitted as telecontrol commands.

In addition, the DMP921 can perform the necessary activations at the USB interface to control the radio. Simple commands entered via the serial interface enable you to use the mobile radio with many applications.

DMP921
THE DMP921
OPENS THE
WAY TO MANY
TELEMETRY
APPLICATIONS
WITH VARIOUS
MODULES OF
PHOENIX CONTACT.

MARKETS
Utilities (Oil, Gas, Water Supply, Electricity), Transportation, Manufacturing, Telemetry, SCADA Applications.
DISTRIBUTION
Worldwide.
LANGUAGES
English, German.

DMP921

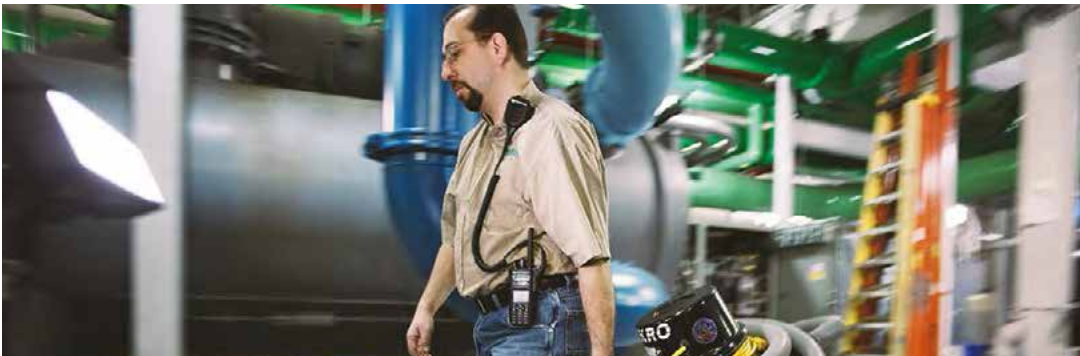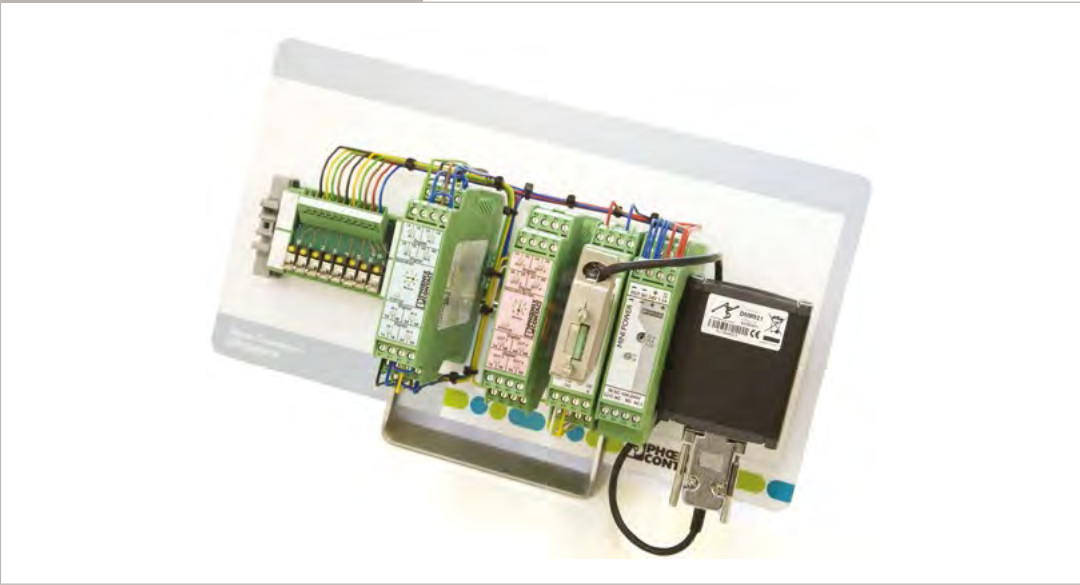

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility
MOTOTRBO series radios.

IP Technology
OPC Server (eg. SCADA).

Interfaces
USB interface to connect DMR radio device (DM3xxx and DM4xxx).
RS485 to expansion Phoenix Contact Module.
DMP921 ADK Software.

MOTOTRBO System Architecture
Single Site, IP Site Connect, Capacity Plus, Linked Capacity Plus.

Other Requirements
Optimal use with:
RAD-IN-8D max. 30 mA.
RAD-OUT-8D max. 160 mA .
CAUTION: do not connect more than 6 of these modules.
RAD-IN-4A: max. 130 mA.
RAD-OUT-4A: max. 130 mA.

KEY FEATURES & BENEFITS

- Channel and zone switch.
- Typing texts into the display.
- Activate / deactivate scanner functions.
- Adjust transmitting capacity.
- Activate the radio call system.
- Control remote radios.
- Send text messages.
- UDP data communication between radio device and computer.
- UDP data communication between two radio devices.
- UDP broadcast data communication.
- Transparent mode for data communication.
- Adjustable interface parameters.

FIND OUT MORE

FLYER: www.atsonline.de/de/downloads/produktinfoblaetter.html

ALSO FROM ATS ELEKTRONIK



DMR921

USB SERIAL CONVERTER FOR MOTOTRBO

The interface unit DMR921 converts the USB interface on MOTOTRBO radios to an RS232 interface, allowing applications and hardware that only support RS232 to function over a DMR network.

The DMR921 converts the native USB interface on the MOTOTRBO mobile radio into RS232, but also performs the required initialisation of the MOTOTRBO USB interface. The radio can be configured and used for various applications with simple instructions being sent via the serial interface.

Typical applications include control of switches, water levels, flow, pressure and quality measurement in utilities, gas and water supply, energy/power supply, wind turbines and industrial automation systems.



DMR Radio with DMR921 Converter

DMR921
THE DMR921 PROVIDES A SERIAL RS232 INTERFACE ON THE MOTOTRBO RADIOS.

MARKETS
Municipal Utilities, Gas and Water Supply, Energy/Power Supply, Industrial Automation.
DISTRIBUTION
Worldwide.
LANGUAGES
English, German.



SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility
DM340x or DM360x Firmware Version at least 1.03.01.

IP Technology
PC or another application able to communicate with AT-commands on RS232 with the DMR921.

Interfaces
USB interface to connect DMR radio device (DM3xxx and DM4xxx).
RS485 to expansion Phoenix Contact Module.
Cable set for the connection to the radio included.

MOTOTRBO System Architecture
Single Site, IP Site Connect, Capacity Plus, Linked Capacity Plus.

KEY FEATURES & BENEFITS

- Change of channel and zone.
- Volume adjustment and loudspeaker control.
- Typing text in the display.
- Switching on/off scanner functions.
- Adjustment of transmitting power.
- Use of emergency call functions.
- Activation of the radios call system.
- Reception of calls.
- Remote control of radios.
- Text messages.
- UDP data communication between two radios or radios and a PC.
- Data transparent mode.
- Adjustable interface parameter.

FIND OUT MORE

WEB: www.atsonline.de/en/mobile-radio/mototrbo/applications/dmr921.html

ALSO FROM ATS ELEKTRONIK




DMRAAlert® TAD

TECHNICAL ALARM DISPATCHER

DMRAAlert® TAD can connect and listen to any types of alarms and dispatch them to the right person or group. TAD forwards Alarms to MOTOTRBO radios by SMS and Voice. When connected to a BMS or LPT output, the Text To Speech (TTS) feature offers the highest performance by delivering the exact message - converted into voice – to the radios. TAD provides a comprehensive range of alarm management functionalities including acknowledgement, escalation, escalation to alternate, schedule, supervision with cartography (Plant Maps), full traceability and safety.

DMRAAlert® TAD dispatches alarms to radios, as well as to phone sets by e-mail, relay outputs and the cartographic supervisor software which manages the plan maps and shows alarms including location when they occur with a red flash and personalised sound alarm. DMRAAlert® TAD Lone Worker Safety alarms are also managed and can be forwarded to MOTOTRBO using specific rules. In combination with the Guard Tour, TAD enables users to send the alarms directly to the patroller, allowing cost reduction as patrollers directly receive alarms on their radios.

DMRALERT®TAD

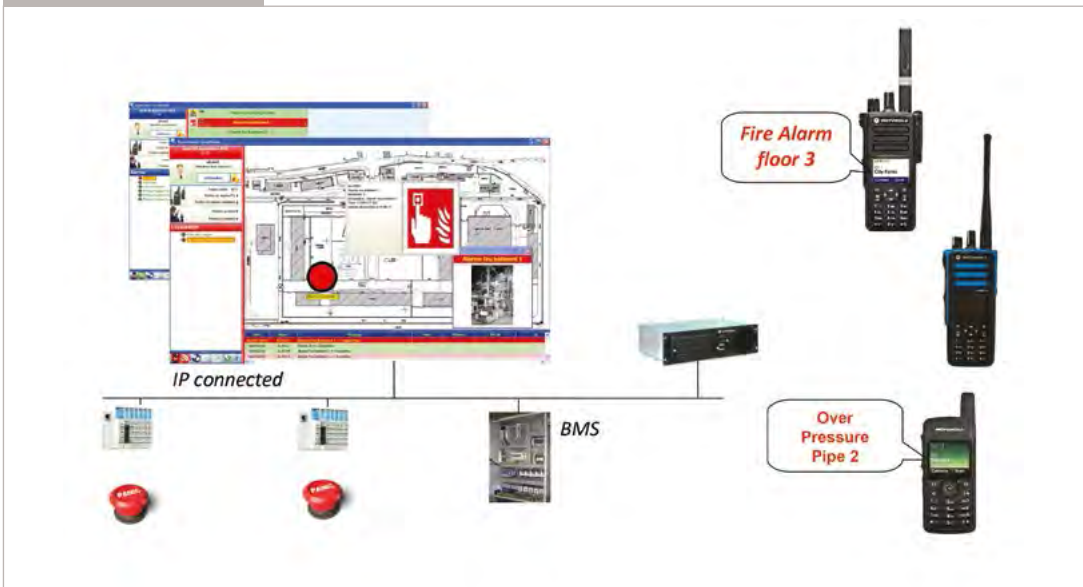

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility
MOTOTRBO radios.

Computer Hardware / Operating Systems
PC Windows 7 Pro, IP, USB, Sound.

MOTOTRBO System Architecture
Conventional, IP Site Connect, Capacity Plus, Linked Capacity Plus, NAI Data.

KEY FEATURES & BENEFITS

- Dispatches all types of Alarms to MOTOTRBO, Phone sets, Email, Relay, Cartographic Dispatcher.
- Connects to most popular systems: Siemens, Chubb, DEF, ABB, BMS fire alarm and building management systems, dry over IP (Wago, Iologic) and Mototrbo Telemetry.
- Pushes alarm messages by SMS, Voice, Text to Speech, to commercial standard hypervisors (Winsup, Intouch, PC Vue, MicroSesame).
- Full IP solution: dry contact over IP, the most popular protocols to connect to BMS, fire alarm systems such as OPC and ESPA and Telemetry.
- GUI : Multi Map Cartographic Supervisor.
- Acknowledgement – Escalation – Escalation to Alternate.
- Personal and group management.
- Schedules.
- Manual alarm launching by operator (e.g. evacuation).
- Enhanced radio – group - dynamic – temporary staff management.
- Status, Text messaging SMS, Radio Control.
- Users & Rights management.
- Full Traceability.

FIND OUT MORE

WEB: www.telecoms.eiffageenergie.com

ALSO FROM EIFFAGE



IFMI1

TRANSPARENT DATA & TELEMETRY INTERFACE

The IFMI1 is a transparent Data and Telemetry Interface developed for use with MOTOTRBO DM3000 Series.

The IFMI1 is based on a microcontroller with a powerful ARM Cortex-M3 core. It comes with the following interfaces and GPIOs: two RS232 interfaces (no hardware flow control), Ethernet 10/100 M interface, one digital output, two digital inputs and diagnostic LEDs.

An optional high sensitivity onboard 16-channel GPS receiver is available.

The IFMI1 is a low cost solution for data transfer in systems where MOTOTRBO technology is being used for voice communication already. It overcomes a shortcoming of the MOTOTRBO product where data can be sent and received only via a USB port.. The IFMI1 can be used for different kinds of applications.

IFMI1



IFMI1

THE IFMI1 IS A LOW COST SOLUTION FOR DATA TRANSFER IN SYSTEMS WHERE MOTOTRBO TECHNOLOGY IS BEING USED FOR VOICE COMMUNICATION ALREADY.

MARKETS

Utility Companies, Railways, Oil and Gas Pipelines, Transportation.

DISTRIBUTION

Europe, Eastern Europe, Middle East and Africa.

LANGUAGES

Czech, English, Ukrainian, Russian.

Other languages on request.



SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility
MOTOTRBO DM3000 Series.

Other Requirements

Very good knowledge of IP technology.

KEY FEATURES & BENEFITS

- Allows direct connection to Ethernet and RS232 interfaces of different data devices like RTUs, computers or simple control devices.
- Can be easily programmed via the Ethernet interface.
- Two RS232 interfaces, programmable from 110 to 115200 bit/sec.
- One Ethernet 10/100M interface.
- One digital output (max. 30V, 150 mA).
- Two digital inputs (L=0 to 0.8 V,H = 2.5 to 14 V).
- Status LEDs (two for Ethernet activity, two are application driven).
- Optional onboard 16 channel GPS receiver.
- Firmware flash able via Ethernet port.
- Power feed via internal radio bus.
- Power drain: 50mA.
- Operating temperature: -30°C to +75°C.
- Storage temperature: -40°C to +85°C.
- Dimensions: 50 x 170 x 30 mm.
- Mounted directly onto the radio and requires no separate power supply.

FIND OUT MORE

WEB: www.connectel.eu/en/applications/ifmi1-option-board

FLYER: www.connectel.eu/userfiles/file/aplications/IFMI1_SpecSheet_eng.pdf



RADIOPAD / RADIOPOD

WIRELESS COMMAND & CONTROL CENTRES FOR MOTOTRBO

radioPad™ & radioPod™ are Android and iOS based applications allowing users to control the functions of their MOTOTRBO radios. Functions that can be controlled include: Channel Control, Site & Zone Control, Voice Calls, Emergency Operation, Subscriber & Group Alias or ID, Contacts Management, Talk Around, Permanent Monitor, Radio Check, Remote Monitor, Scan, Text Messaging, Call Logging, Security Radio, Lone Worker, Direct Mode Communication between various radioPad & radioPod devices, Enterprise Class and Wireless Security (WEP, WPA-2-Enterprise, WPA2-PSK, WPA-PSK).

With radioPad™ / radioPod™, users have the capability to control multiple radios from a tablet, using a customised user interface to personalise communications. radioPad™ / radioPod™ also has multi-language capabilities.

Typical applications include Credit Card Readers, Authentication, Scanners, Barcode, Biometrics, Alarms, Invoicing, Ticketing and RFID.

RADIOPAD / RADIOPOD



MARKETS

Public Safety, Government, Transportation, Oil & Gas, Taxi and Limousine, Utilities, Public and Student Transportation, Private Security, Municipal Services, Emergency Services, Fleet Management.

DISTRIBUTION

Worldwide.

LANGUAGES

English, Russian, French, Spanish, German, Turkish, Arabic, Romanian, Czech, Chinese, Italian.



SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility
MOTOTRBO 1.8.

Computer Hardware / Operating Systems
SafeMobile SafeBridge™ Unit, Android based tablet or mobile device (5" screen – Pod / 7"+ screen – Pad).

Interfaces
Android 2.1 or higher.

MOTOTRBO System Architecture
Capacity Plus, Linked Capacity Plus, Conventional, IP Site Connect & Connect Plus.

Other Requirements
Basic computer and Windows system knowledge.

KEY FEATURES & BENEFITS

- Android-based or iOS solution with smartphone app.
- Customisable GUI interface and multiple languages.
- Integrates with existing radio system.
- Wireless freedom to control communications from your wrist, from outside of the vehicle, or away from the base station in your dispatch center.
- Email transmission and image transmission.
- Improved field communications.
- Enhanced emergency response communication with full Enterprise Class Encryption.
- Advanced text messaging allows two-way SMS communication between a radio or group of radios.
- Voice call (Private, Group and All Calls) direct to any Radio or other radioPad/Pods. Emergency calls with remote DeKey (for selected users).

FIND OUT MORE

WEB: www.safemobile.com/solution-radiopad-radiopod.php

ALSO FROM SAFEMOBILE




SmartPTT FILE TRANSFER

FREEWARE APPLICATION TO TRANSFER FILES
THROUGH A MOTOTRBO RADIO CHANNEL

SmartPTT File Transfer is a freeware application to transfer files through the radio channel based on MOTOTRBO radios. SmartPTT File Transfer was specifically designed for effective data transmission taking into account the limitations of the connection provided by MOTOTRBO.

It consists of 2 modules: a Client Application which transfers the selected files to the server PC, and a Server Application which accepts the files sent from the client. The MOTOTRBO radio must be connected to the server computer via USB.

SmartPTT FILE TRANSFER

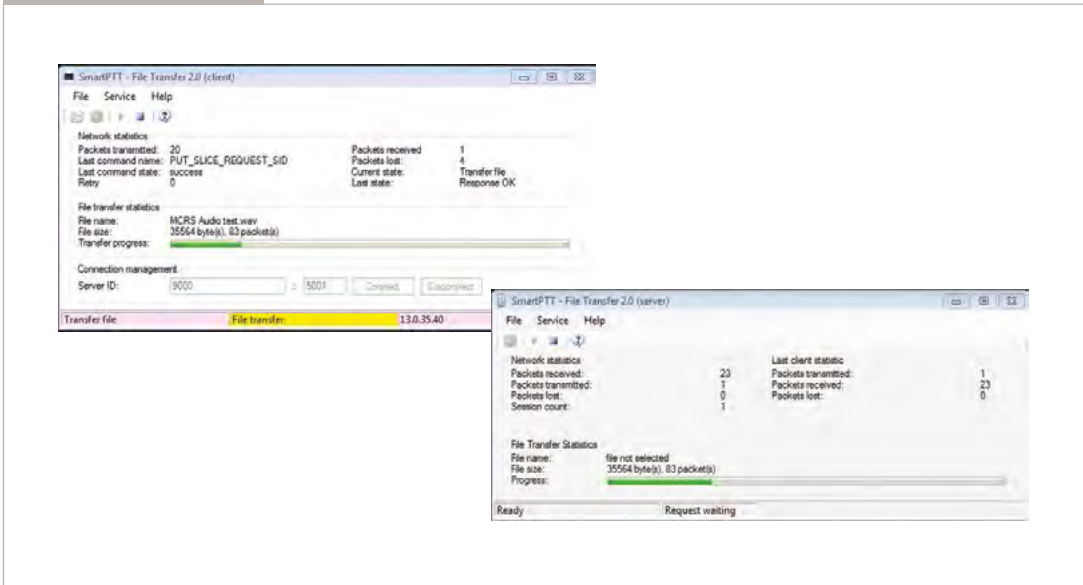

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility
MOTOTRBO radio with firmware 1.08.32 or higher.

Computer Hardware / Operating Systems
PC, Windows XP SP3 / 2003 / Vista / Windows 7 / Windows 8, 1Hz x86 Pentium 4, 512 Mb RAM, 10 Mb HDD.

Interfaces
USB 2.0.

MOTOTRBO System Architecture
IP Site Connect, conventional networks.

Other Requirements
NET Framework 4.0, USB data cables for programming MOTOTRBO radios.

KEY FEATURES & BENEFITS

- Transfer speed 1150 Bit/s.
- Automatic transfer recovery.
- List of clients allowed to transfer to the server.
- Designed for effective data transmission taking into account the limitations of the connection provided by MOTOTRBO.
- Easy to install, lightweight application and immediately available to download.
- Free of charge.

FIND OUT MORE

WEB: www.smartptt.com/en/filetransfer.html

ALSO FROM ELCOMPLUS





WiTACS

TOUCH SCREEN AUTOMOTIVE TABLET,
NAVIGATOR, DATA EXCHANGE

WiTACS is a professional and energy-efficient PC for in-vehicle use. The control panel is a touch screen display that provides a simple and easy interface for use with different MOTOTRBO radios.

In the world of advanced communications there is an increasing demand for a vehicle system that is able to use different radio technologies. WiTACS is suitable for public safety and commercial use for data transmission and navigation purposes, alarm management and database access.

A tablet running on the Android operating system is able to send and receive messages from its 7/10 inch touch screen display using MOTOTRBO and also 3G networks.

With WiTACS users can perform database queries using DMR data transmission. It is also possible to shoot a picture with the tablet camera or create word documents and send them all to the control room.

WiTACS



WiTACS
TAKING FULL
ADVANTAGE OF
MOTOTRBO DIGITAL
TRANSMISSION,
WiTACS
PROVIDES MOBILE
CONNECTIVITY
AND COMPUTING
POWER FOR
VEHICLE USERS -
DELIVERING MORE
EFFECTIVE FLEET
MANAGEMENT
AND RESOURCE
DEPLOYMENT.

MARKETS

Government, Emergency
Services, Railways, Airports,
Metro, Taxi, Bus and Limo
Service, Rental Car Companies,
Utilities.

DISTRIBUTION

EMEA and Latin America.

LANGUAGES

English, Italian, French, Spanish.
Other languages on request.



SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility
MOTOTRBO radios with Bluetooth (4000 Series).

MOTOTRBO System Architecture
Conventional, IP Site Connect, Capacity Plus,
Linked Capacity Plus and Connect Plus.

Other Requirements
Bluetooth, IP, MOTOTRBO, Android Tablet.

KEY FEATURES & BENEFITS

- Facilitates remote access to database for direct access to different services.
- Versatile product for more effective fleet management and resource deployment whilst taking full advantage of digital transmission.
- Data exchange using DMR and 3G networks.
- Touch screen display.
- Supports connection to GPS in MOTOTRBO radios or to external receiver and uses the GPS coordinates in many applications such as AVL.
- Database query (e.g. plate request information) or customised query.
- "Text to speech" functionality.
- Android OS.
- Pictures management.
- Document management.

FIND OUT MORE

WEB: <http://witacs.eurocomtel.com>

ALSO FROM EUROCOM TELECOMUNICAZIONI



ZONITH ACS


AUTOMATIC ALARM DISPATCH FOR INCREASED SAFETY AND EFFICIENCY

The ZONITH Alarm Control System (ACS) is a Windows based software application that intelligently and automatically dispatches emergency and business critical alarms to MOTOTRBO radios.

ZONITH ACS picks up alarms from any alarm source. It pairs the alarm with the right on duty employee using an intelligent scheduler, ensuring that problems get handled at the right time by the right person. ACS automatically selects alarm responders based on availability, location and skill set. ACS is a fully automated system and is designed to significantly improve the way people work and manage their time. Alarms can be sent as text messages to people using MOTOTRBO, TEAM VoWLAN phones, pagers, mobile phones or email devices.

The ZONITH Alarm Control System user interface is browser based and uses an intelligent scheduler to assign alarms to individual users based on competencies and provides automatic alarm escalation to ensure action is taken. The ZONITH Alarm Control System combined with MOTOTRBO radios allows people to remotely acknowledge, decline and close alarms using MOTOTRBO radio messaging and Job Ticketing features.

ZONITH ACS

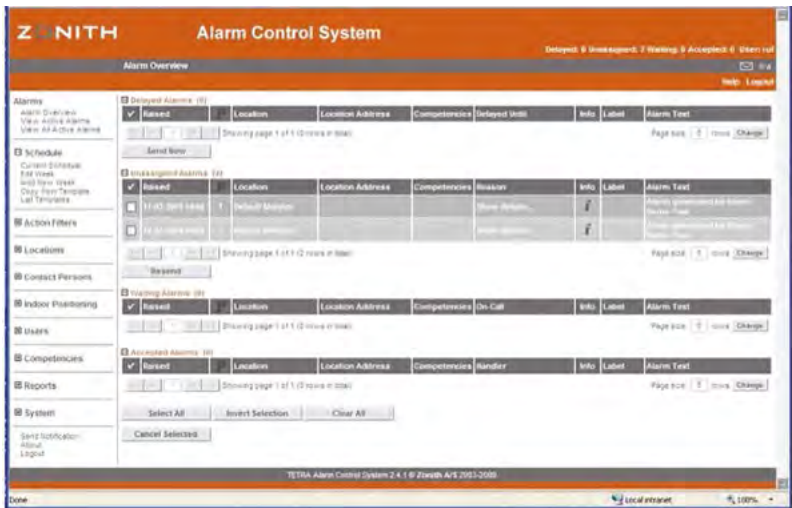

ZONITH ACS INFRASTRUCTURE

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

1 MOTOTRBO base station, radio firmware version 1.6.0 or greater.

Computer Hardware / Operating Systems

PC Dual-core 2GHZ CPU or higher, 4Gb of system RAM, Windows Server or Windows 7.

Interfaces

Supports Alarm Interfaces: RS232, I/O, ASCII, SMPT, OPC, SMS, TETRA, DMR, Ekahau, DATABASE.

Ask for information about other interfaces.

MOTOTRBO System Architecture

Direct, Conventional Repeater, IP Site Connect, Capacity Plus.

KEY FEATURES & BENEFITS

- Active, Centralised and Automated 24/7.
- Handles any alarm from any source.
- Watch schedule integration.
- System Alive Checker.
- Prioritises alarms for optimal use of resources.
- Receive emergency and business critical alarm text messages on MOTOTRBO radio.
- Acknowledge, decline, close and escalate alarms using your MOTOTRBO radio interface.
- Define and schedule the flow of alarms to ensure the right people are immediately notified.
- Create action filters to handover alarm messages to other media, e.g. GSM, E-mail.
- Automatically dispatch alarms based on peoples competency and location.
- Notify mobile phone and e-mail users when people press their MOTOTRBO radio.
- Provide Centralised Lone Worker functionality by raising alarms if people don't respond to a message.
- In combination with ZONITH Indoor Positioning System (IPS) supports 'Safe Area' to automatically activate Centralised Lone Worker.
- Provides a web browser interface from any connected computer.

FIND OUT MORE

PRODUCT PAGE: www.zonith.com/products/acs
PRODUCT FLYER: www.zonith.com/downloads

ALSO FROM ZONITH

MARKETS

Utilities, Natural Resources, Offshore Oil & Gas, Prisons, Hospitality, Manufacturing, Healthcare, Education.

DISTRIBUTION

North America, EMEA, APAC, CALA.

LANGUAGES

English (documentation and setup).
User Interface can be in any Latin language.



MIGRATION TO DIGITAL



MIGRATION TO DIGITAL



MOTOTRBO’s ability to operate in both analogue and digital mode enables you to migrate to digital two-way radio at your own pace and preserve your existing investment in analogue equipment.

The ability for analogue and digital radio users to communicate on the same MOTOTRBO system offers a cost-effective solution that helps to avoid disruptions to communications during the transition period and ensures that smooth operations are maintained.



BPG TRBOPLUS TALK FINDER

OPTION BOARD FOR GPS LOCALISATION ON ANALOGUE CHANNEL


BPG TRBOplus is an option board specifically designed for Motorola radios, portable or mobile, with the aim of extending the standard radio functions. On request we can personalise the functionality of the presented board.

TRBOplus TALK FINDER combined with COM dispatcher allows GPS localisation and fleet management even on analogue channels with FFSK modulation. MOTOTRBO radios will be able to send GPS positioning both on analogue and digital DMR networks.

This option board also adds some optional functionalities like 5 tones signalling (encode + decode), FFSK signalling, GPS info of the local or remote radio (over the air LRRP requests) and GPS datalogger.

TRBOplus TALK FINDER simplifies the migration from analogue to digital DMR systems, adding GPS localisation even on analogue channels.

BPG TRBOPLUS TALK FINDER

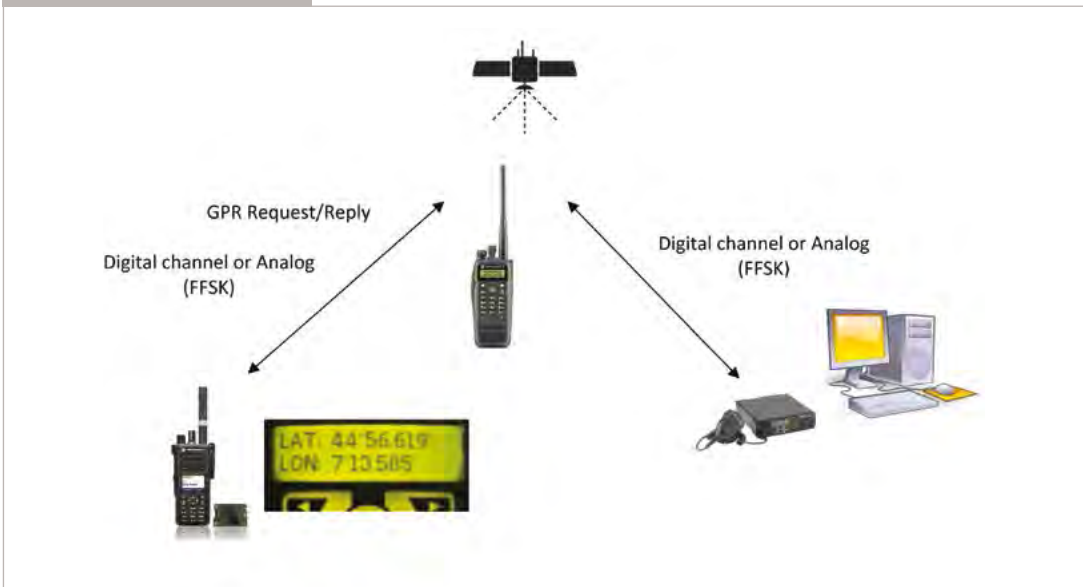

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

DP3601, DM3601, DP4801, DM4601 radios.

Computer Hardware / Operating Systems

Windows 7/8 with installed Motorola USB drivers for programming and downloading RSSI/GPS data.

Interfaces

Motorola USB programming cable.

KEY FEATURES & BENEFITS

- GPS localisation even on analogue channels (by FFSK modulation).
- GPS info on radio display of the local or remote radio (over the air LRRP requests).
- 5 tone signaling (encode and decode).
- FFSK signaling (tx on, tx off, radio on, PTT id, call, status etc).
- Optional GPS datalogger: stores detailed GPS tracks on internal flash memory for post downloading via USB (tracks exported in std. GPX or KMZ format for Google Earth).

FIND OUT MORE

WEB: www.bpg.it/en/index.php?section=trboplus

FLYER: www.bpg.it/en/soluzioni_bpg/trboplus/pdf/TRBOPLUS_Talk%20Finder_eng.pdf

ALSO FROM BPG RADIOCOMUNICAZIONI

MARKETS

Government and Enterprise, Fleet Dispatching, AVL, Public Transportation, Taxi Companies, Emergency and Rescue, Security.

DISTRIBUTION

Worldwide.

LANGUAGES

English.



K-TERM42

OPTION BOARD FOR DP/DM3XXX RADIOS - SELECT 5, MAN DOWN AND INHOUSE LOCALISATION

The K-TERM42 is an option board that can be fitted on the portable radios DP340x and DP360x and the mobile radios DM340x and DM360x. On analogue channels, the K-TERM42 is a select 5 decoding and encoding module with a Man Down alarm functionality. The K-TERM42 select 5 module can be used in all analogue radio systems with the select 5 functionality.

On digital channels, both the Man Down and lone worker functionality can be used for in-house localisation. The signals from beacons (K-TERM70) are detected and the radio position is sent to the base.

Programming the functionality is easy thanks to the K-TERM CPS program. Once the option board is installed in the radio and the radio attached to the PC with the Motorola USB cable, the CPS program allows users to set all parameters and save them in the option board. When a new option board firmware is released, it can be uploaded to the option board using the same CPS programme.

K-TERM42



SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility

DP340x / DP360x and DM340x / DM360x.

Computer Hardware / Operating Systems

Windows 2000 / XP / VISTA with installed Motorola USB drivers for connecting the DMR radios.

Interfaces

USB programming cable from Motorola.

Other Requirements

After installing the option board in the radio, the Motorola dealer must be equipped with the tools to restore the waterproofing of the radio. The necessary tools and information are available from Motorola.

KEY FEATURES & BENEFITS

- Lone Worker.
- Man Down.
- In-house localisation.
- Universal Option Board.
- 5-Tone Signaling.
- Console for analogue mode.
- All buttons programmable for encoding sequences.
- Customised options.
- Tilt switch for Man Down (optional).
- Alarm notifications.

FIND OUT MORE

WEB: www.kilchherr.com

FLYER: www.kilchherr.com/page.php?id=sfhe5

ALSO FROM KILCHHERR ELEKTRONIK

MARKETS

All Vertical Markets.

DISTRIBUTION

Worldwide.

LANGUAGES

English, French, German.



MOTO n Board

GENERIC OPTION BOARD WITH ADVANCED FEATURES FOR ANALOGUE AND DIGITAL CHANNELS

ADEO – EUROCOM MOTO n Board is an option board based on Motorola GOB specifically designed for Motorola MOTOTRBO 3000 or 4000 Series. This option board makes it easier to migrate from analogue to digital and allows an extension of the standard radio digital functions.


On analogue channel it allows to send emergency codes to a group or individual, by pressing a button on the radio, according to the protocol ETS 300-230. It provides the ability to make group calls and send SMS displaying the operating status according to the protocol ETS 300-230. Users can also manage GPS localisation, even on analogue channels, with FFSK modulation.

On the analogue channel, it allows you to send predefined messages and their GPS position by an extended press of a numeric button. It also enables users to send their GPS position every time the PTT button is released.

MOTO n Board implements the Dynamic Group Numbering Assignment (DGNA) service. This service allows the creation and modification of the Rx radio group list from the Operation Centre.

The MOTO n Board option board is customisable to the specific needs of the customer.

MOTO n Board

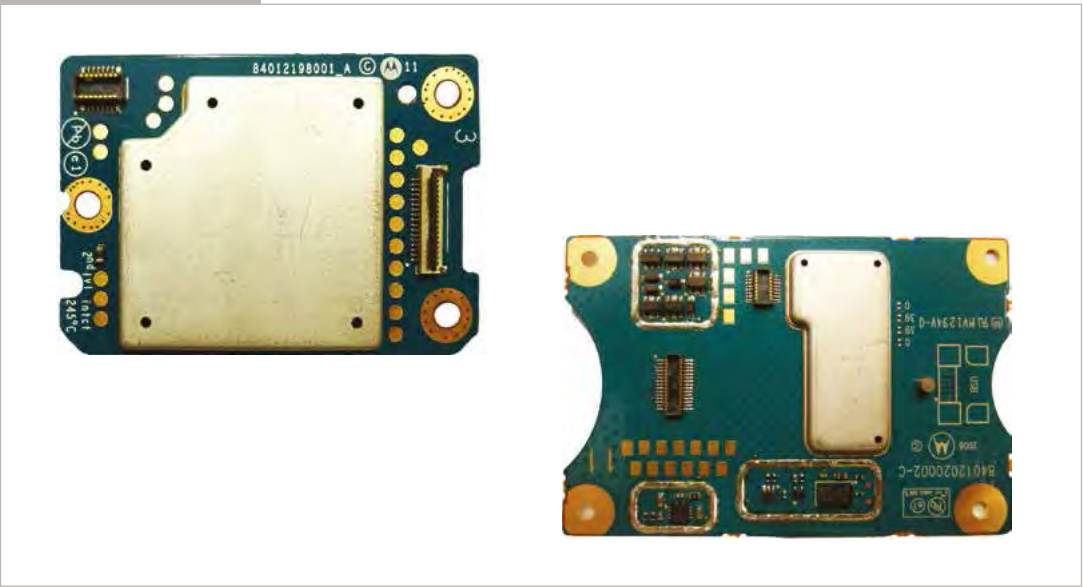

SYSTEM REQUIREMENTS

Radio Hardware / Releases Compatibility
MOTOTRBO 3000 or 4000 Series.

Interfaces
Programmable with Eurocom CPS Software.

Other Requirements
Knowledge of MOTOTRBO radio programming.

KEY FEATURES & BENEFITS

- Supports features according to the protocol ETS 300-230 such as sending emergency codes to a group or individual, making group calls and sending SMS displaying the operating status.
- GPS localisation even on analogue channels (by FFSK modulation).
- GPS info on radio display.
- FFSK signaling.
- GPS position by an extended press of a numeric button.
- GPS position every time you release the PTT.
- DGNA Service.
- Digital Signal Processor 16 bit da 120 MIPS @ 120 MHz.
- Feeding 3.3 - 1.8 Volt.
- Power Consumption 145 mW.
- Weight 9 g.

FIND OUT MORE

WEB: <http://motonboard.eurocomtel.com>

ALSO FROM EUROCOM TELECOMUNICAZIONI

MARKETS
Public Safety, Government and Enterprise, Emergency Services, Train Stations, Airports, Metro, Taxi and Limousine, Vehicle Fleet Market, Utilities.

DISTRIBUTION
EMEA and Latin America.

LANGUAGES
English, Italian, French, Spanish. Other languages on request.



🐦 @mototrbo dev | #mototrboapps

The MOTOTRBO™ ADP Applications Catalogue should help you quickly locate a supplier for a solution that will meet your specific needs. Note that all information given in this catalogue directly or via downloadable files is based on statements by the MOTOTRBO ADP Partners. Motorola Solutions is not responsible or liable for any product or information provided by our ADP Partners.

For more information on how to remaster your communications with MOTOTRBO, visit www.motorolasolutions.com/mototrbo or find your closest Motorola representative or Authorised Partner at www.motorolasolutions.com/contactus

MOTOROLA, MOTO, MOTOROLA SOLUTIONS and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners.
© 2013 Motorola Solutions, Inc. All rights reserved. J1882_MOTOTRBO_APP_CAT_ENDUSER_10/2013



MOTOROLA SOLUTIONS